


GES-2M/4M

GES-C


KAWAMOTO STAINLESS STEEL PUMP

2, 4 POLES / 50 Hz


SUCTION SIZE 40 ~ 100 MM

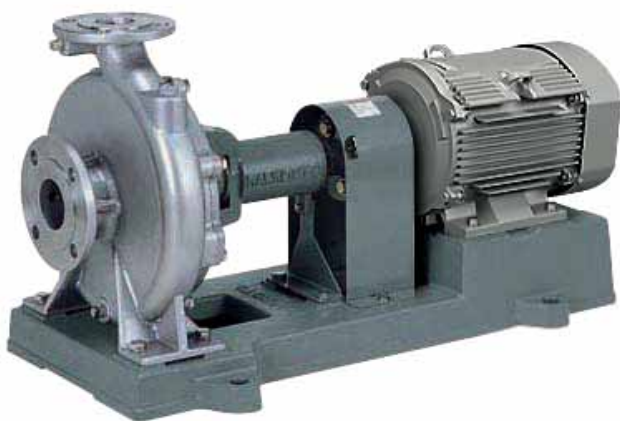

GES-2M

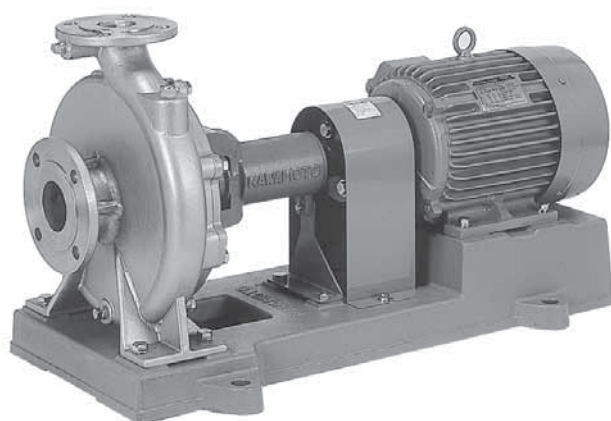

GES-4M

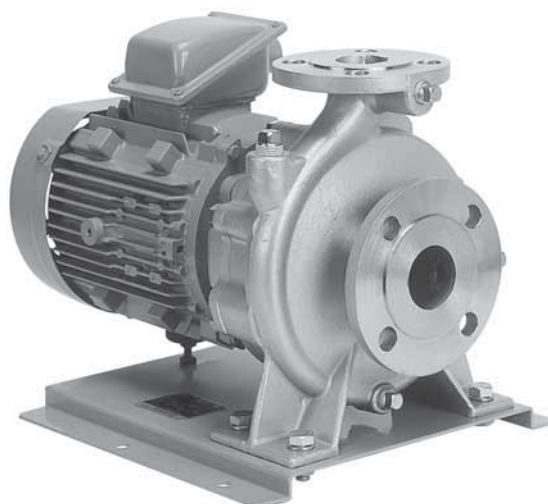

GES-C

APPLICATIONS AND FEATURES

■ APPLICATIONS

- Cooling water
- Cold and hot water circulation
- Food, beverage, liquor industry
- Water supply to building and factories
- Small regional drinking water
- Industry
- General water supply
- Factory production equipment

■ FEATURES

- Sanitary and clean due to stainless material are used for portion contacting liquid.
- Maintenance is easy because long life mechanical seal is standardly adopted for shaft seal with few water leakages.
- Easy maintenance and inspection due to back pull out construction.
- Long life and strong against dust and humidity because TEFC outdoor motor is standardly adopted.
- High efficiency and high total head pump design by using precision cast stainless steel material.

STANDARD SPECIFICATIONS

| Description | | Model : GES-2M/4M |
|----------------------|-------------|--|
| Liquid | Name | Clean water |
| | Temperature | 0 ~ 90 °C |
| Max Working Pressure | | 10 bar |
| Synchronous Speed | | 3000/1500 min ⁻¹ |
| Installation | | TEFC outdoor use (Motor IP55, Class F) |
| Material | Casing | Stainless cast iron (SCS13) |
| | Impeller | Stainless cast iron (SCS14) |
| | Shaft | Stainless steel (SUS316) |
| Construction | Impeller | Closed |
| | Shaft Seal | Mechanical seal (SIC x Carbon x FKM) |
| | Sealing | None |
| | Bearing | Sealed ball bearing |
| Flange | | JIS 10K |
| Baseplate | | Cast iron (FC150) |

OPTIONAL SPECIFICATIONS

| Description | | Model : GES-2M/4M |
|-------------------------|-------------|---|
| Liquid | Name | Non freeze liquid |
| | Temperature | -15 ~ 40 °C or -5 ~ 40 °C |
| Material | Casing | Stainless cast iron (SCS14) |
| | Impeller | Stainless cast iron (SCS14) |
| | Shaft | Stainless steel (SUS316) |
| Construction | Impeller | Closed |
| | Shaft Seal | Mechanical seal (SIC x SIC x H-NBR) |
| | Sealing | Quenching |
| | Bearing | Sealed ball bearing |
| Flange | | JIS 10K |
| Baseplate | | Channel baseplate for European motor bland |
| Anti-Corrosion Painting | | Urethane resin coating + Non touch seal bearing structure |
| | | Epoxy resin coating |


STANDARD SPECIFICATIONS

| Description | | Model : GES-C |
|----------------------|-------------|--|
| Liquid | Name | Clean water |
| | Temperature | 0 ~ 90 °C |
| Max Working Pressure | | 10 bar |
| Synchronous Speed | | 3000 min-1 |
| Installation | | TEFC outdoor use (Motor IP44, Class F) |
| Material | Casing | Stainless cast iron (SC513) |
| | Impeller | Stainless cast iron (SC513) |
| | Shaft | Stainless steel (SUS304) |
| Construction | Impeller | Closed |
| | Shaft Seal | Mechanical seal (SIC x Carbon x FKM) |
| | Sealing | None |
| | Bearing | Sealed ball bearing |
| Flange | | JIS 10K |
| Baseplate | | SPHC or Cast iron (FC150) |

PERFORMANCE CHART


GES-2M

50Hz

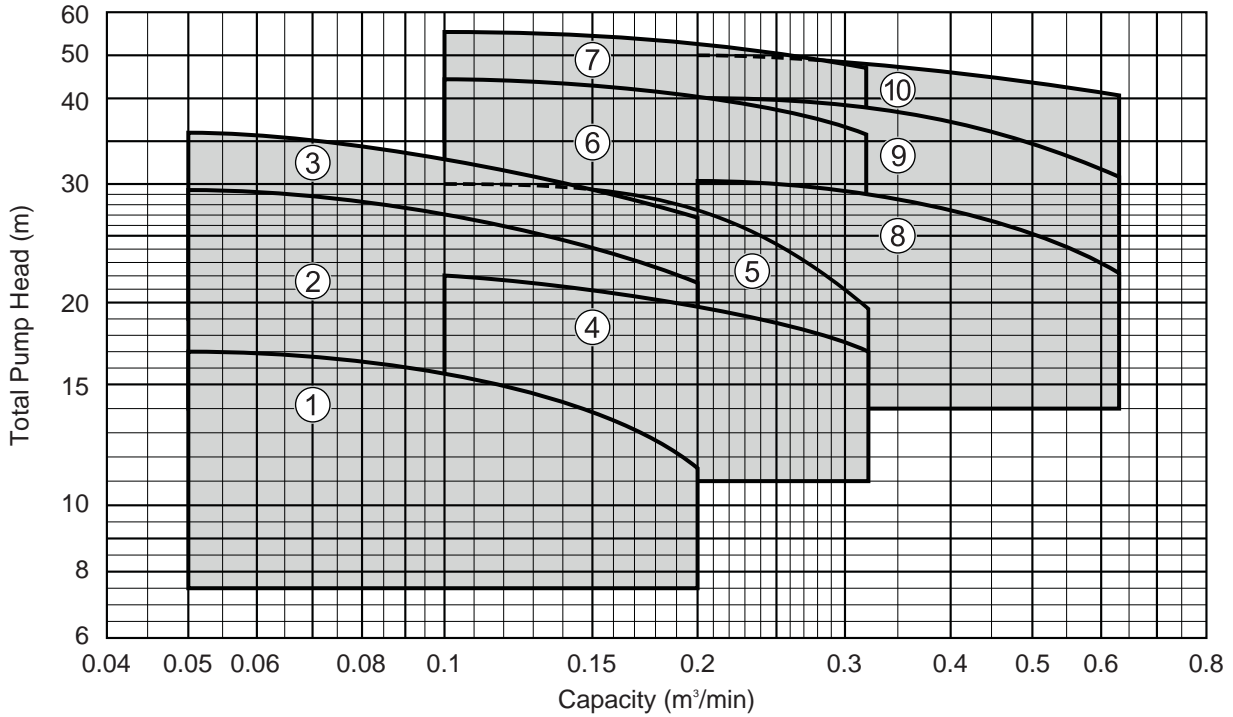


GES-4M

50Hz


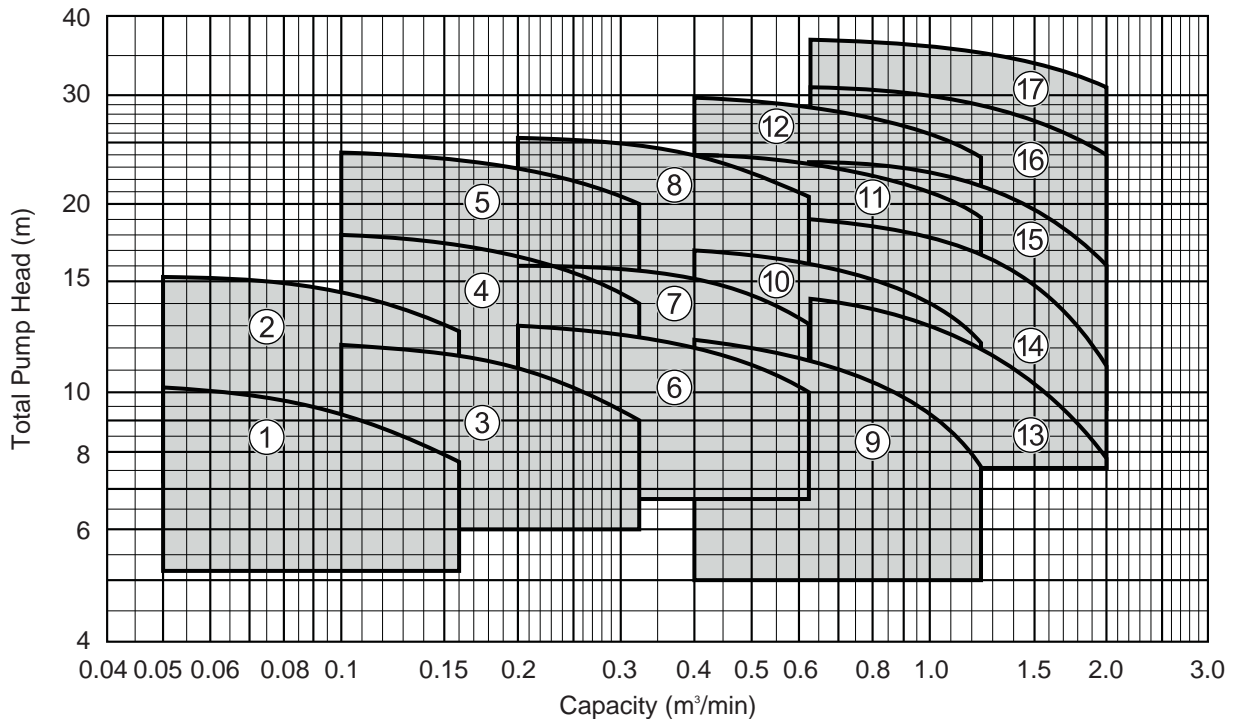


GES-C

50Hz

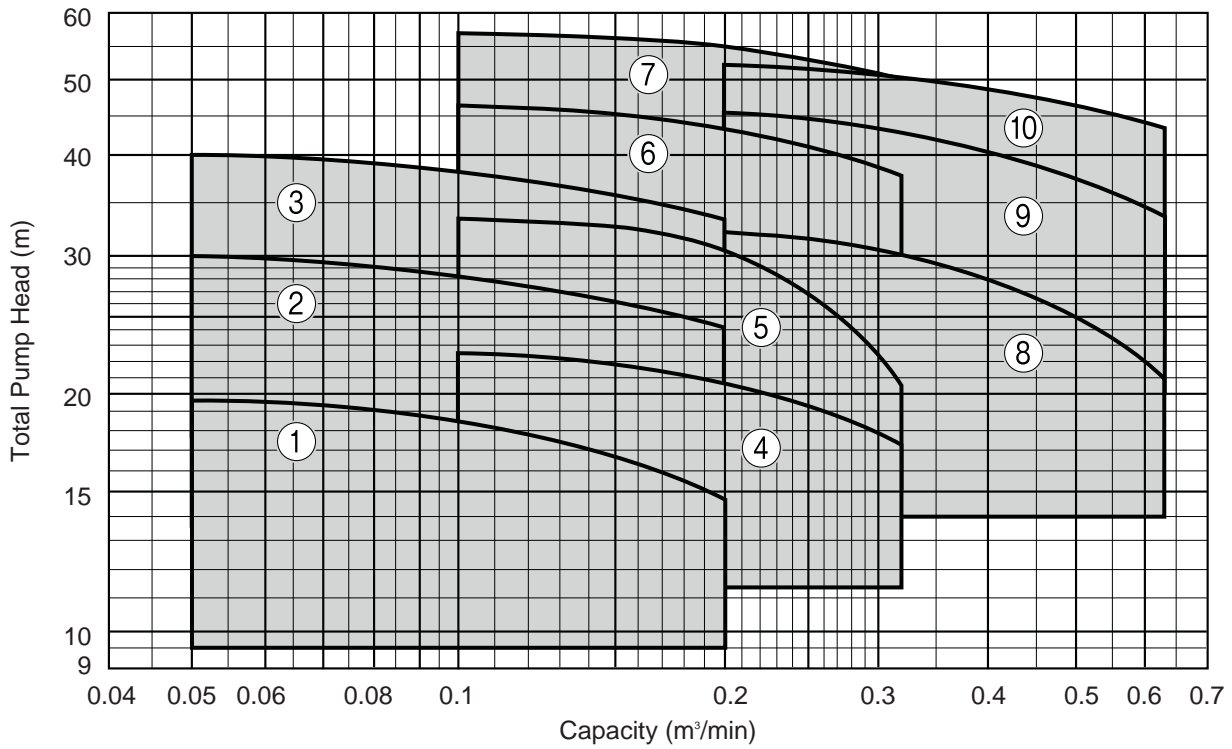

MODEL CODE

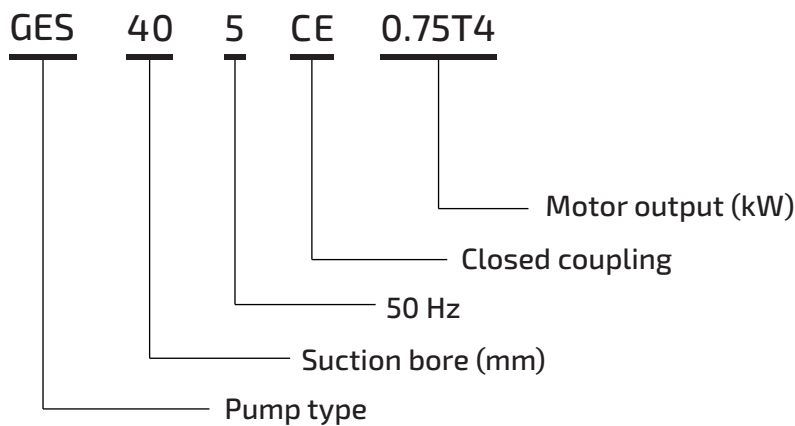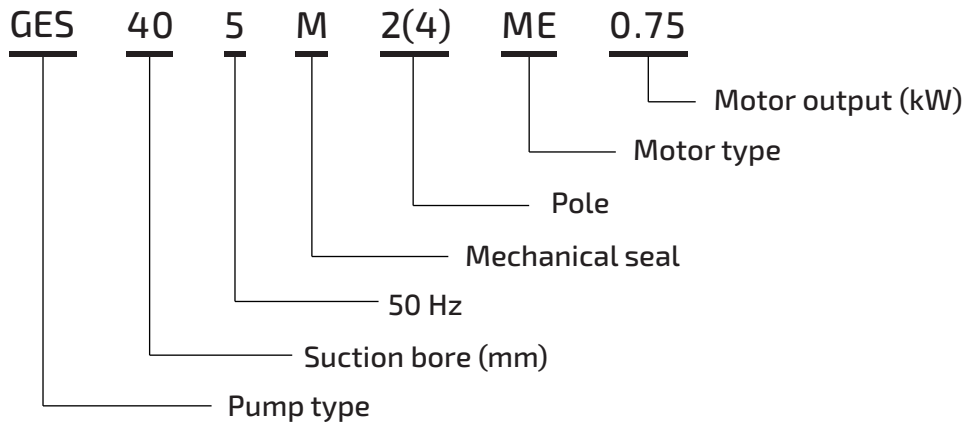

SPECIFICATION TABLE

GES-2M

| No. | Model | Motor (kW) | Performance | | | | Maximum Back Pressure (Mpa) |
|-----|----------------|------------|--------------------------------|----------------|--------------------------------|----------------|-----------------------------|
| | | | Capacity (m ³ /min) | Total Head (m) | Capacity (m ³ /min) | Total Head (m) | |
| 1 | GES405M2ME0.75 | 0.75 | 0.05 | 17 | 0.2 | 11.5 | 0.80 |
| 2 | GES405M2ME1.5 | 1.5 | 0.05 | 29.5 | 0.2 | 21.5 | 0.68 |
| 3 | GES405M2ME2.2 | 2.2 | 0.05 | 35.5 | 0.2 | 27 | 0.62 |
| 4 | GES505M2ME1.5 | 1.5 | 0.1 | 22 | 0.32 | 17 | 0.75 |
| 5 | GES505M2ME2.2 | 2.2 | 0.1 | 30 | 0.32 | 19.5 | 0.67 |
| 6 | GES505M2ME3.7 | 3.7 | 0.1 | 44 | 0.32 | 36 | 0.54 |
| 7 | GES505M2ME5.5 | 5.5 | 0.1 | 55 | 0.32 | 47.5 | 0.42 |
| 8 | GES655M2ME3.7 | 3.7 | 0.2 | 30.5 | 0.63 | 22 | 0.68 |
| 9 | GES655M2ME5.5 | 5.5 | 0.2 | 40.5 | 0.63 | 31 | 0.58 |
| 10 | GES655M2ME7.5 | 7.5 | 0.2 | 50 | 0.63 | 41.5 | 0.48 |

GES-4M

| No. | Model | Motor (kW) | Performance | | | | Maximum Back Pressure (Mpa) |
|-----|----------------|------------|--------------------------------|----------------|--------------------------------|----------------|-----------------------------|
| | | | Capacity (m ³ /min) | Total Head (m) | Capacity (m ³ /min) | Total Head (m) | |
| 1 | GES405M4M0.4 | 0.4 | 0.05 | 10.2 | 0.16 | 7.8 | 0.88 |
| 2 | GES405M4ME0.75 | 0.75 | 0.05 | 15.2 | 0.16 | 12.8 | 0.83 |
| 3 | GES505M4ME0.75 | 0.75 | 0.1 | 12.2 | 0.32 | 9 | 0.85 |
| 4 | GES505M4ME1.5 | 1.5 | 0.1 | 18 | 0.32 | 14 | 0.80 |
| 5 | GES505M4ME2.2 | 2.2 | 0.1 | 24.2 | 0.32 | 20 | 0.74 |
| 6 | GES655M4ME1.5 | 1.5 | 0.2 | 13 | 0.63 | 10 | 0.85 |
| 7 | GES655M4ME2.2 | 2.2 | 0.2 | 16 | 0.63 | 13.2 | 0.82 |
| 8 | GES655M4ME3.7 | 3.7 | 0.2 | 25.5 | 0.63 | 20.8 | 0.72 |
| 9 | GES805M4ME2.2 | 2.2 | 0.4 | 12.5 | 1.25 | 7.5 | 0.85 |
| 10 | GES805M4ME3.7 | 3.7 | 0.4 | 17 | 1.25 | 12.2 | 0.80 |
| 11 | GES805M4ME5.5 | 5.5 | 0.4 | 24 | 1.25 | 19.2 | 0.74 |
| 12 | GES805M4ME7.5 | 7.5 | 0.4 | 29.5 | 1.25 | 23.5 | 0.68 |
| 13 | GES1005M4ME3.7 | 3.7 | 0.63 | 14.2 | 2.0 | 7.8 | 0.83 |
| 14 | GES1005M4ME5.5 | 5.5 | 0.63 | 19 | 2.0 | 11.2 | 0.79 |
| 15 | GES1005M4ME7.5 | 7.5 | 0.63 | 23.5 | 2.0 | 16 | 0.74 |
| 16 | GES1005M4ME11 | 11 | 0.63 | 31 | 2.0 | 24 | 0.68 |
| 17 | GES1005M4ME15 | 15 | 0.63 | 37 | 2.0 | 31 | 0.61 |

SPECIFICATION TABLE

GES-C

| No. | Model | Motor (kW) | Performance | | | | Maximum Back Pressure (Mpa) |
|-----|--------------|---------------|-----------------------------------|-------------------|-----------------------------------|-------------------|--------------------------------------|
| | | | Capacity (m ³ /min) | Total Head (m) | Capacity (m ³ /min) | Total Head (m) | |
| 1 | GES405CE0.75 | 0.75 | 0.05 | 19.5 | 0.2 | 14.5 | 0.77 |
| 2 | GES405CE1.5 | 1.5 | 0.05 | 30 | 0.2 | 24 | 0.68 |
| 3 | GES405CE2.2 | 2.2 | 0.05 | 40 | 0.2 | 33 | 0.57 |
| 4 | GES505CE1.5 | 1.5 | 0.1 | 22.5 | 0.32 | 17 | 0.74 |
| 5 | GES505CE2.2 | 2.2 | 0.1 | 33.5 | 0.32 | 20.5 | 0.64 |
| 6 | GES505CE3.7 | 3.7 | 0.1 | 45.5 | 0.32 | 37.5 | 0.51 |
| 7 | GES505CE5.5 | 5.5 | 0.1 | 57 | 0.32 | 50 | 0.39 |
| 8 | GES655CE3.7 | 3.7 | 0.2 | 32.5 | 0.63 | 21 | 0.66 |
| 9 | GES655CE5.5 | 5.5 | 0.2 | 45 | 0.63 | 34 | 0.53 |
| 10 | GES655CE7.5 | 7.5 | 0.2 | 52 | 0.63 | 43 | 0.46 |

PUMP DATA

GES-2M

| No. | Model | Impeller | Mechanical Seal | Bearing | | Coupling | Key | Maximum Back Pressure (Mpa) |
|-----|----------------|----------|-----------------|--------------|--------|------------------|------------------|-----------------------------|
| | | | | Motor | Pump | | | |
| 1 | GES405M2ME0.75 | SCS14 | Ø16 EA560H-N | 6204ZZ | 6204ZZ | Ø63 x Ø19 x Ø19 | 6x6x20 | 0.8 |
| 2 | GES405M2ME1.5 | SCS14 | Ø20 EA560H-N | 6204ZZ | 6204ZZ | Ø74 x Ø19 x Ø24 | 6x6x32 | 0.68 |
| 3 | GES405M2ME2.2 | SCS14 | | 6204ZZ | 6204ZZ | Ø74 x Ø19 x Ø24 | 6x6x32 | 0.62 |
| 4 | GES505M2ME1.5 | SCS14 | | 6304ZZ | 6304ZZ | Ø100 x Ø19 x Ø24 | 6x6x32 | 0.75 |
| 5 | GES505M2ME2.2 | SCS14 | | 6304ZZ | 6304ZZ | Ø100 x Ø19 x Ø24 | 6x6x32 | 0.67 |
| 6 | GES505M2ME3.7 | SCS14 | | 6304ZZ | 6304ZZ | Ø112 x Ø19 x Ø28 | 6x6x32 | 0.54 |
| 7 | GES505M2ME5.5 | SCS14 | | Ø25 EA560H-N | 6305ZZ | 6305ZZ | Ø125 x Ø24 x Ø38 | 6x6x32 |
| 8 | GES655M2ME3.7 | SCS14 | Ø20 EA560H-N | 6304ZZ | 6304ZZ | Ø112 x Ø19 x Ø28 | 6x6x32 | 0.68 |
| 9 | GES655M2ME5.5 | SCS14 | Ø30 EA560H-N | 6306ZZ | 6306ZZ | Ø125 x Ø24 x Ø38 | 8x7x40 | 0.58 |
| 10 | GES655M2ME7.5 | SCS14 | | 6306ZZ | 6306ZZ | Ø125 x Ø24 x Ø38 | 8x7x40 | 0.48 |

GES-4M

| No. | Model | Impeller | Mechanical Seal | Bearing | | Coupling | Key | Maximum Back Pressure (Mpa) |
|-----|----------------|----------|-----------------|---------|--------|------------------|---------|-----------------------------|
| | | | | Motor | Pump | | | |
| 1 | GES-405M-4M0.4 | SCS14 | Ø25 EA560H-N | 6305ZZ | 6305ZZ | Ø74 x Ø24 x Ø14 | 8x7x40 | 0.88 |
| 2 | GES405M4ME0.75 | SCS14 | | 6305ZZ | 6305ZZ | Ø74 x Ø24 x Ø19 | 8x7x40 | 0.83 |
| 3 | GES505M4ME0.75 | SCS14 | | 6305ZZ | 6305ZZ | Ø74 x Ø24 x Ø19 | 8x7x40 | 0.85 |
| 4 | GES505M4ME1.5 | SCS14 | | 6305ZZ | 6305ZZ | Ø74 x Ø24 x Ø24 | 8x7x40 | 0.8 |
| 5 | GES505M4ME2.2 | SCS14 | | 6305ZZ | 6305ZZ | Ø112 x Ø24 x Ø28 | 8x7x40 | 0.74 |
| 6 | GES655M4ME1.5 | SCS14 | | 6305ZZ | 6305ZZ | Ø74 x Ø24 x Ø24 | 8x7x40 | 0.85 |
| 7 | GES655M4ME2.2 | SCS14 | | 6305ZZ | 6305ZZ | Ø112 x Ø24 x Ø28 | 8x7x40 | 0.82 |
| 8 | GES655M4ME3.7 | SCS14 | | 6305ZZ | 6305ZZ | Ø125 x Ø24 x Ø28 | 8x7x40 | 0.72 |
| 9 | GES805M4ME2.2 | SCS14 | | 6305ZZ | 6305ZZ | Ø112 x Ø24 x Ø28 | 8x7x40 | 0.85 |
| 10 | GES805M4ME3.7 | SCS14 | | 6305ZZ | 6305ZZ | Ø125 x Ø24 x Ø28 | 8x7x40 | 0.8 |
| 11 | GES805M4ME5.5 | SCS14 | Ø30 EA560H-N | 6307ZZ | 6307ZZ | Ø140 x Ø32 x Ø38 | 10x8x50 | 0.74 |
| 12 | GES805M4ME7.5 | SCS14 | | 6307ZZ | 6307ZZ | Ø140 x Ø32 x Ø38 | 10x8x50 | 0.68 |
| 13 | GES1005M4ME3.7 | SCS14 | | 6307ZZ | 6307ZZ | Ø125 x Ø32 x Ø28 | 10x8x50 | 0.83 |
| 14 | GES1005M4ME5.5 | SCS14 | 35 EA560H-N | 6307ZZ | 6307ZZ | Ø140 x Ø32 x Ø38 | 10x8x50 | 0.79 |
| 15 | GES1005M4ME7.5 | SCS14 | | 6307ZZ | 6307ZZ | Ø140 x Ø32 x Ø38 | 10x8x50 | 0.74 |
| 16 | GES1005M4ME11 | SCS14 | | 6307ZZ | 6307ZZ | Ø160 x Ø32 x Ø42 | 10x8x50 | 0.68 |
| 17 | GES1005M4ME15 | SCS14 | | 6307ZZ | 6307ZZ | Ø160 x Ø32 x Ø42 | 10x8x50 | 0.61 |

PUMP DATA


GES-2M

| No. | Model | Motor | | Impeller Diameter (mm) | Coupling CLA | Shaft Diameter | |
|-----|----------------|------------|------------|------------------------|--------------|----------------|------------|
| | | Power (kW) | Frame (No) | | | Pump (mm) | Motor (mm) |
| 1 | GES405M2ME0.75 | 0.75 | 80L | G-122 | AF-53 | 19 | 19 |
| 2 | GES405M2ME1.5 | 1.5 | 90L | G-156 | AF-64 | 19 | 24 |
| 3 | GES405M2ME2.2 | 2.2 | 90L | G-173 | AF-64 | 19 | 24 |
| 4 | GES505M2ME1.5 | 1.5 | 90L | G-138 | 100 | 19 | 24 |
| 5 | GES505M2ME2.2 | 2.2 | 90L | G-159 | 100 | 19 | 24 |
| 6 | GES505M2ME3.7 | 3.7 | 112M | G-187 | 112 | 19 | 28 |
| 7 | GES505M2ME5.5 | 5.5 | 132S | G-208 | 125 | 24 | 38 |
| 8 | GES655M2ME3.7 | 3.7 | 112M | G-157 | 112 | 19 | 28 |
| 9 | GES655M2ME5.5 | 5.5 | 132S | G-182 | 125 | 24 | 38 |
| 10 | GES655M2ME7.5 | 7.5 | 132S | G-199 | 125 | 24 | 38 |

GES-4M


| No. | Model | Motor | | Impeller Diameter (mm) | Coupling CLA | Shaft Diameter | |
|-----|----------------|------------|------------|------------------------|--------------|----------------|------------|
| | | Power (kW) | Frame (No) | | | Pump (mm) | Motor (mm) |
| 1 | GES-405M-4M0.4 | 0.4 | 71M | G-182 | AF-64 | 24 | 14 |
| 2 | GES405M4ME0.75 | 0.75 | 80M | G-215 | AF-64 | 24 | 19 |
| 3 | GES505M4ME0.75 | 0.75 | 80M | G-193 | AF-64 | 24 | 19 |
| 4 | GES505M4ME1.5 | 1.5 | 90L | G-240 | AF-64 | 24 | 24 |
| 5 | GES505M4ME2.2 | 2.2 | 100L | G-269 | 112 | 24 | 28 |
| 6 | GES655M4ME1.5 | 1.5 | 90L | G-198 | AF-64 | 24 | 24 |
| 7 | GES655M4ME2.2 | 2.2 | 100L | G-216 | 112 | 24 | 28 |
| 8 | GES655M4ME3.7 | 3.7 | 112M | G-275 | 125 | 24 | 28 |
| 9 | GES805M4ME2.2 | 2.2 | 100L | G-193 | 112 | 24 | 28 |
| 10 | GES805M4ME3.7 | 3.7 | 112M | G-224 | 125 | 24 | 28 |
| 11 | GES805M4ME5.5 | 5.5 | 132S | G-264 | 140 | 32 | 38 |
| 12 | GES805M4ME7.5 | 7.5 | 132M | G-298 | 140 | 32 | 38 |
| 13 | GES1005M4ME3.7 | 3.7 | 112M | G-210 | 125 | 32 | 28 |
| 14 | GES1005M4ME5.5 | 5.5 | 132S | G-240 | 140 | 32 | 38 |
| 15 | GES1005M4ME7.5 | 7.5 | 132M | G-266 | 140 | 32 | 38 |
| 16 | GES1005M4ME11 | 11 | 160M | G-308 | 160 | 32 | 42 |
| 17 | GES1005M4ME15 | 15 | 160L | G-334 | 160 | 32 | 42 |

SECTION VIEW - MECHANICAL SEAL (GES-2M/4M)

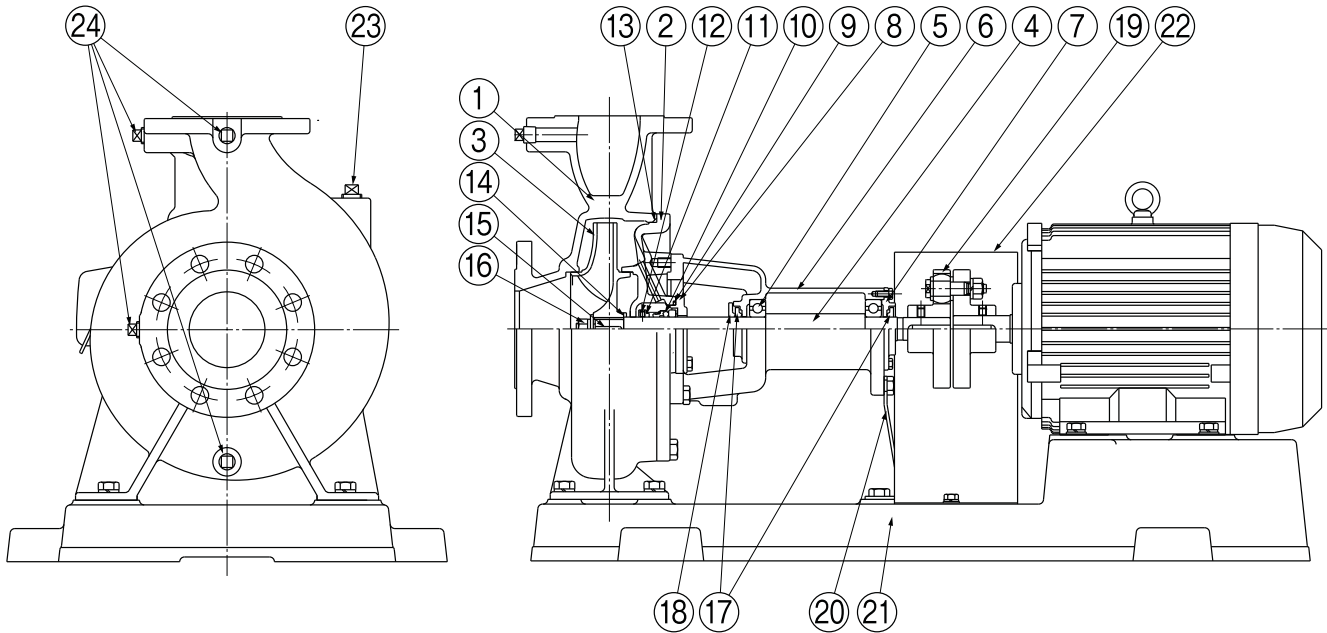


| No. | Part Name | Material | No. | Part Name | Material |
|-----|-----------------------|------------------------------------|-----|----------------|------------------------------------|
| 1 | Casing | SCS13 | 13 | O-Ring | Rubber |
| 2 | Casing cover | SCS13 | 14 | Ajust ring | SUS316 |
| 3 | Impeller | SCS14 | 15 | Key | SUS316 |
| 4 | Shaft | SUS316+S35C | 16 | Nut | SUS304 (GES-2M) SUS316 (GES-4M) |
| 5 | Bearing | - | 17 | Deflector | Rubber |
| 6 | Bearing box | FC | 18 | Deflector | Rubber |
| 7 | Bearing cover | FC | 19 | Coupling | FC |
| 8 | Mechanical seal cover | SCS14 | 20 | Supporter | SPHC |
| 9 | O-Ring | Rubber | 21 | Baseplate | FC |
| 10 | Mechanical seal | - | 22 | Coupling guard | SPCC |
| 11 | Stopper ring | SUS316 | 23 | Plug | SCS13 |
| 12 | Screw | SUS304 (GES-2M) SUS316 (GES-4M) | 24 | Plug | SCS13 |

SECTION VIEW - MECHANICAL SEAL (GES-C)

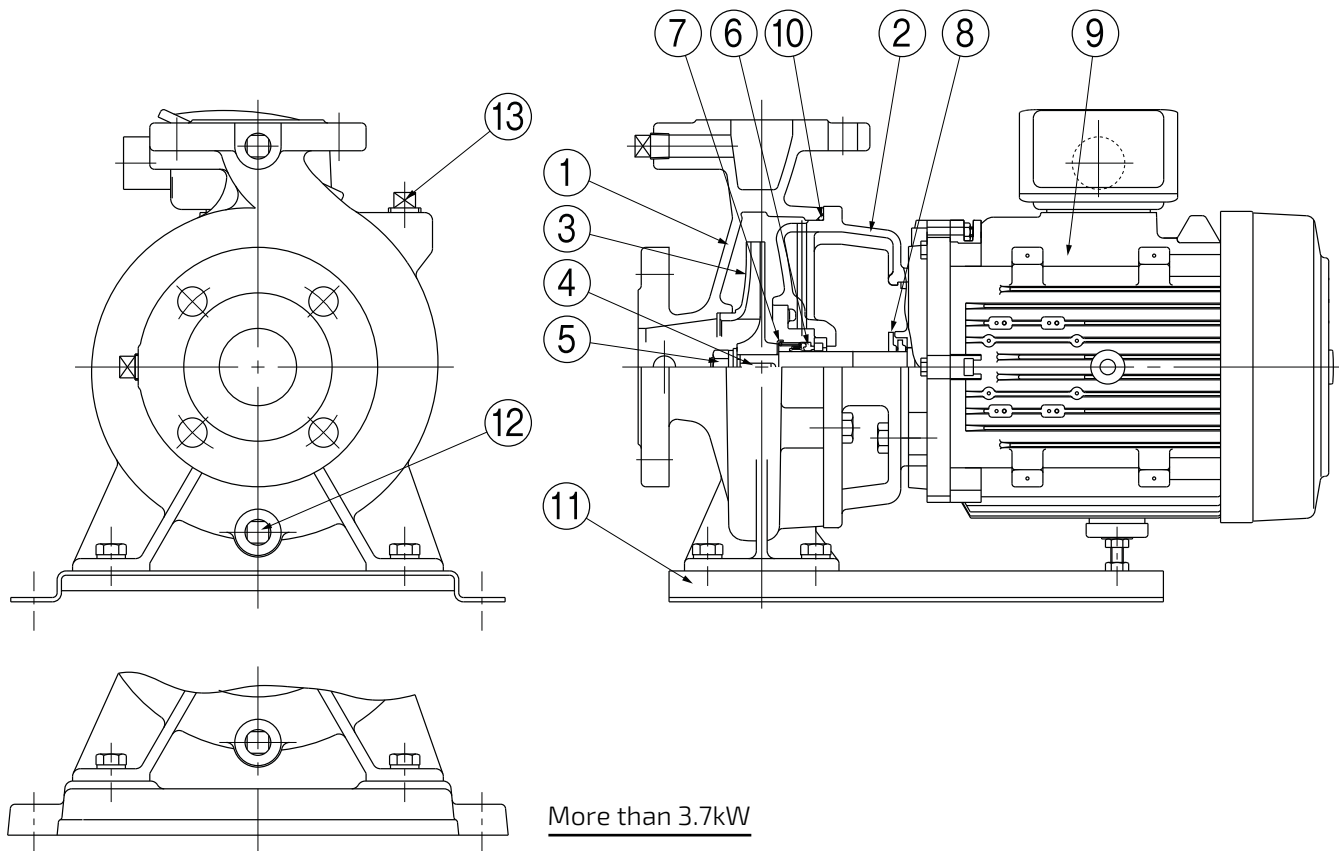


| No. | Part Name | Material | No. | Part Name | Material |
|-----|-----------------|----------|-----|-----------|------------|
| 1 | Casing | SCS13 | 8 | Deflector | Rubber |
| 2 | Casing cover | SCS13 | 9 | Motor | - |
| 3 | Impeller | SCS14 | 10 | O-Ring | Rubber |
| 4 | Key | SUS304 | 11 | Baseplate | SPHC or FC |
| 5 | Nut | SUS304 | 12 | Plug | SCS13 |
| 6 | Mechanical seal | - | 13 | Plug | SCS13 |
| 7 | Spring | SUS304 | | | |

DRAWING DIMENSION – BARE PUMP (GES-2M)

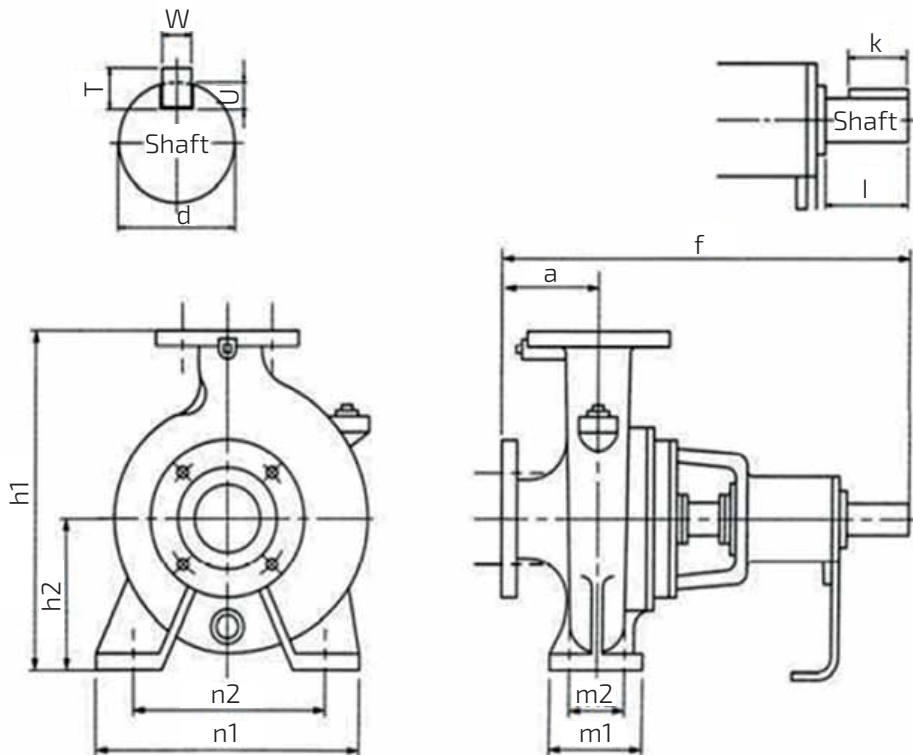

| Bore d1xd2 (mm) | Model | Motor (kW) | Pump Dimension | | | | | | | | Shaft | | Coupling Key | | | | Weight (kg) |
|-----------------------|----------------|---------------|----------------|-----|-----|-----|-----|-----|-----|----|-------|----|--------------|---|-----|----|----------------|
| | | | h1 | h2 | n1 | n2 | a | f | m1 | m2 | d | l | T | W | U | k | |
| 40x32 | GES405M2ME0.75 | 0.75 | 252 | 112 | 180 | 140 | 65 | 265 | 80 | 56 | 19 | 28 | 6 | 6 | 3.5 | 20 | 18 |
| | GES405M2ME1.5 | 1.5 | 292 | 132 | 240 | 190 | 80 | 360 | 100 | 70 | 19 | 40 | 6 | 6 | 3.5 | 32 | 26.7 |
| | GES405M2ME2.2 | 2.2 | 292 | 132 | 240 | 190 | 80 | 360 | 100 | 70 | 19 | 40 | 6 | 6 | 3.5 | 32 | 27.7 |
| 50x40 | GES505M2ME1.5 | 1.5 | 252 | 112 | 190 | 140 | 80 | 440 | 100 | 70 | 19 | 40 | 6 | 6 | 3.5 | 32 | 32.7 |
| | GES505M2ME2.2 | 2.2 | 292 | 132 | 240 | 190 | 80 | 440 | 100 | 70 | 19 | 40 | 6 | 6 | 3.5 | 32 | 28 |
| | GES505M2ME3.7 | 3.7 | 292 | 132 | 240 | 190 | 80 | 440 | 100 | 70 | 19 | 40 | 6 | 6 | 3.5 | 32 | 36.2 |
| | GES505M2ME5.5 | 5.5 | 340 | 160 | 240 | 190 | 80 | 440 | 100 | 70 | 24 | 50 | 6 | 6 | 4 | 32 | 50.6 |
| 65x50 | GES655M2ME3.7 | 3.7 | 292 | 132 | 240 | 190 | 80 | 440 | 100 | 70 | 19 | 40 | 6 | 6 | 3.5 | 32 | 37.2 |
| | GES655M2ME5.5 | 5.5 | 340 | 160 | 265 | 212 | 100 | 460 | 100 | 70 | 24 | 50 | 6 | 6 | 4 | 32 | 55.6 |
| | GES655M2ME7.5 | 7.5 | 340 | 160 | 265 | 212 | 100 | 460 | 100 | 70 | 24 | 50 | 7 | 8 | 4 | 40 | 51.6 |

DRAWING DIMENSION – BARE PUMP (GES-4M)

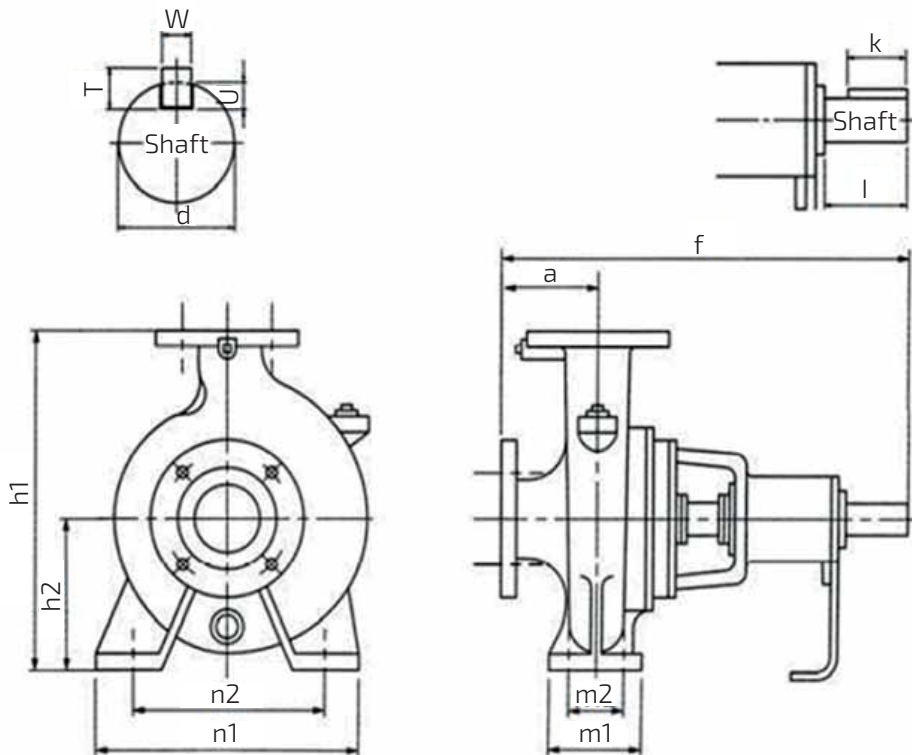




| Bore d1xd2 (mm) | Model | Motor (kW) | Pump Dimension | | | | | | | | Shaft | | Coupling Key | | | | Weight (kg) |
|-----------------------|----------------|---------------|----------------|-----|-----|-----|-----|-----|-----|-----|-------|------|--------------|----|---|------|----------------|
| | | | h1 | h2 | n1 | n2 | a | f | m1 | m2 | d | l | T | W | U | k | |
| 40x32 | GES-405M-4M0.4 | 0.4 | 340 | 160 | 240 | 190 | 80 | 460 | 100 | 70 | 24 | 50 | 7 | 8 | 4 | 40 | 31.6 |
| | GES405M4ME0.75 | 0.75 | 340 | 160 | 240 | 190 | 80 | 460 | 100 | 70 | 24 | 50 | 7 | 8 | 4 | 40 | 38.1 |
| 50x40 | GES505M4ME0.75 | 0.75 | 340 | 160 | 265 | 212 | 100 | 460 | 100 | 70 | 24 | 50 | 7 | 8 | 4 | 40 | 40.1 |
| | GES505M4ME1.5 | 1.5 | 405 | 180 | 320 | 250 | 100 | 460 | 125 | 95 | 24 | 50 | 7 | 8 | 4 | 40 | 46 |
| | GES505M4ME2.2 | 2.2 | 405 | 180 | 320 | 250 | 100 | 460 | 125 | 95 | 24 | 50 | 7 | 8 | 4 | 40 | 43 |
| 65x50 | GES655M4ME1.5 | 1.5 | 360 | 160 | 265 | 212 | 100 | 460 | 100 | 70 | 24 | 50 | 7 | 8 | 4 | 40 | 37 |
| | GES655M4ME2.2 | 2.2 | 360 | 160 | 265 | 212 | 100 | 460 | 100 | 70 | 24 | 50 | 7 | 8 | 4 | 40 | 42 |
| | GES655M4ME3.7 | 3.7 | 405 | 180 | 320 | 250 | 100 | 460 | 125 | 95 | 24 | 50 | 7 | 8 | 4 | 40 | 49 |
| 80x65 | GES805M4ME2.2 | 2.2 | 405 | 180 | 320 | 250 | 100 | 460 | 125 | 95 | 24 | 50 | 7 | 8 | 4 | 40 | 45.4 |
| | GES805M4ME3.7 | 3.7 | 405 | 180 | 320 | 250 | 100 | 460 | 125 | 95 | 24 | 50 | 7 | 8 | 4 | 40 | 42 |
| | GES805M4ME5.5 | 5.5 | 450 | 200 | 360 | 280 | 100 | 570 | 160 | 120 | 32 | 24.5 | 8 | 10 | 5 | 50 | 62 |
| | GES805M4ME7.5 | 7.5 | 505 | 225 | 400 | 315 | 125 | 595 | 160 | 120 | 32 | 80 | 8 | 10 | 5 | 55.5 | 83.8 |
| 100x80 | GES1005M4ME3.7 | 3.7 | 430 | 180 | 345 | 280 | 125 | 595 | 125 | 95 | 32 | 24.5 | 8 | 10 | 5 | 50 | 69 |
| | GES1005M4ME5.5 | 5.5 | 505 | 225 | 400 | 315 | 125 | 595 | 160 | 120 | 32 | 80 | 8 | 10 | 5 | 50 | 51 |
| | GES1005M4ME7.5 | 7.5 | 505 | 225 | 400 | 315 | 125 | 595 | 160 | 120 | 32 | 80 | 8 | 10 | 5 | 50 | 81 |
| | GES1005M4ME11 | 11 | 565 | 250 | 400 | 315 | 125 | 595 | 160 | 120 | 32 | 80 | 8 | 10 | 5 | 50 | 96 |
| | GES1005M4ME15 | 15 | 565 | 250 | 400 | 315 | 125 | 595 | 160 | 120 | 32 | 80 | 8 | 10 | 5 | 50 | 102 |

DRAWING DIMENSION - COMPLETE SET (GES-2M)

● Flange

Unit : mm

| Suction Bore | Discharge Bore | g1 | g2 | n1 | n2 |
|--------------|----------------|-----|-----|----|----|
| d1 | d2 | | | | |
| 40 | 32 | 105 | 100 | 4 | 4 |
| 50 | 40 | 120 | 105 | 4 | 4 |
| 65 | 50 | 140 | 120 | 4 | 4 |

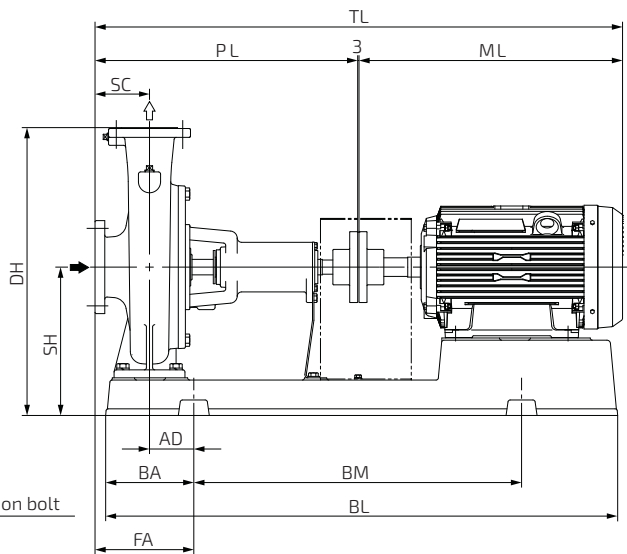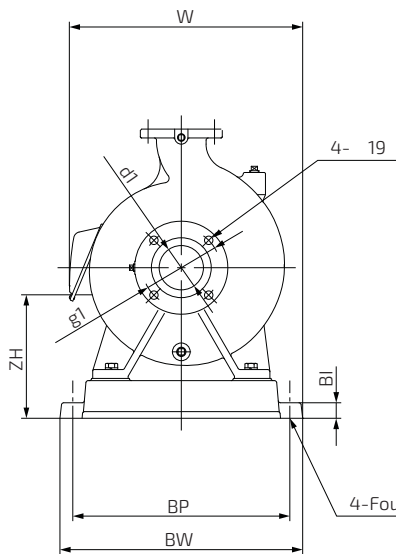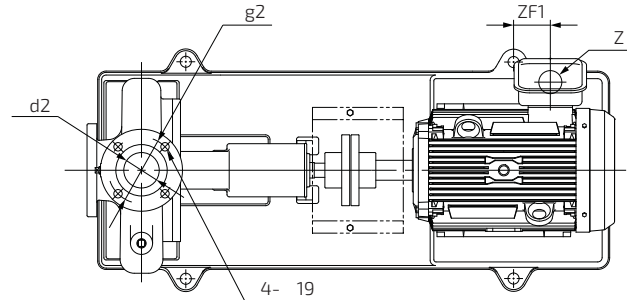

Unit : mm

| Suction d1 x Discharge d2 (mm) | Model | Motor (kW) | Pump | | Baseplate | | | | | |
|---|----------------|---------------|------|-----|-----------|-----|-----|-----|-----|-----|
| | | | SC | PL | BI | BL | BA | BM | BP | BW |
| 40x32 | GES405M2ME0.75 | 0.75 | 65 | 265 | 20 | 468 | 82 | 300 | 230 | 266 |
| | GES405M2ME1.5 | 1.5 | 80 | 360 | 25 | 648 | 112 | 420 | 290 | 336 |
| | GES405M2ME2.2 | 2.2 | 80 | 360 | 25 | 648 | 112 | 420 | 290 | 336 |
| 50x40 | GES505M2ME1.5 | 1.5 | 80 | 440 | 25 | 726 | 127 | 480 | 290 | 336 |
| | GES505M2ME2.2 | 2.2 | 80 | 440 | 25 | 722 | 120 | 480 | 290 | 336 |
| | GES505M2ME3.7 | 3.7 | 80 | 440 | 25 | 818 | 138 | 540 | 320 | 366 |
| | GES505M2ME5.5 | 5.5 | 80 | 440 | 25 | 819 | 138 | 540 | 350 | 396 |
| 65x50 | GES655M2ME3.7 | 3.7 | 80 | 440 | 25 | 818 | 138 | 540 | 320 | 366 |
| | GES655M2ME5.5 | 5.5 | 100 | 460 | 25 | 819 | 138 | 540 | 350 | 396 |
| | GES655M2ME7.5 | 7.5 | 100 | 460 | 25 | 819 | 138 | 540 | 350 | 396 |




Continue to the next page

DRAWING DIMENSION - COMPLETE SET (GES-2M)

● Flange

Unit : mm

| Suction Bore | Discharge Bore | g1 | g2 | n1 | n2 |
|--------------|----------------|-----|-----|----|----|
| d1 | d2 | | | | |
| 40 | 32 | 105 | 100 | 4 | 4 |
| 50 | 40 | 120 | 105 | 4 | 4 |
| 65 | 50 | 140 | 120 | 4 | 4 |

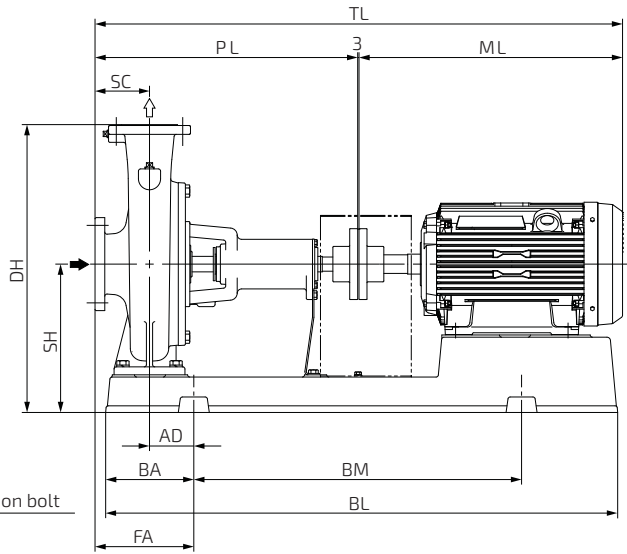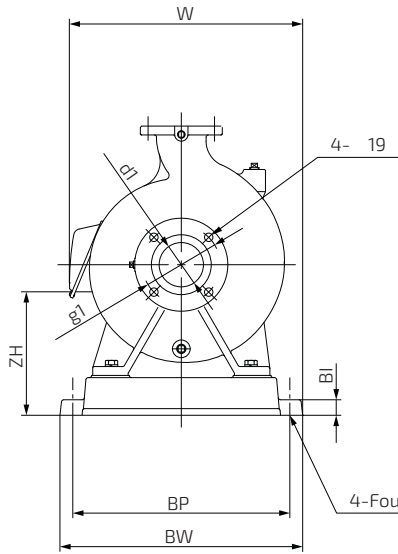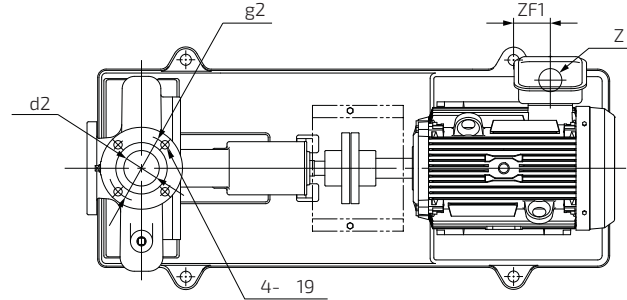

Unit : mm




| Suction d1 x Discharge d2 (mm) | Model | Motor (kW) | Combination | | | | | | | Other | | | | Weight (kg) |
|---|----------------|---------------|-------------|-----|-----|----|-----|-----|-----|-------|-----|-----|----|----------------|
| | | | DH | SH | TL | AD | FA | W | ML | ZF1 | ZF2 | ZH | Z | |
| 40x32 | GES405M2ME0.75 | 0.75 | 317 | 177 | 530 | 35 | 100 | 278 | 262 | 48 | -3 | 160 | 27 | 39 |
| | GES405M2ME1.5 | 1.5 | 347 | 187 | 675 | 50 | 130 | - | 312 | 35 | 13 | 171 | 27 | 54 |
| | GES405M2ME2.2 | 2.2 | 347 | 187 | 675 | 50 | 130 | - | 312 | 35 | 13 | 171 | 27 | 57 |
| 50x40 | GES505M2ME1.5 | 1.5 | 307 | 167 | 755 | 60 | 140 | - | 312 | 45 | 13 | 154 | 27 | 60 |
| | GES505M2ME2.2 | 2.2 | 347 | 187 | 755 | 55 | 135 | - | 312 | 50 | 13 | 174 | 27 | 64 |
| | GES505M2ME3.7 | 3.7 | 357 | 197 | 830 | 70 | 150 | - | 381 | 24 | 8 | 190 | 27 | 90 |
| | GES505M2ME5.5 | 5.5 | 405 | 225 | 894 | 70 | 150 | - | 451 | 67 | 2 | 215 | 27 | 119 |
| 65x50 | GES655M2ME3.7 | 3.7 | 357 | 197 | 830 | 70 | 150 | - | 381 | 22 | 8 | 190 | 27 | 91 |
| | GES655M2ME5.5 | 5.5 | 405 | 225 | 914 | 70 | 170 | - | 451 | 67 | 2 | 215 | 27 | 124 |
| | GES655M2ME7.5 | 7.5 | 405 | 225 | 914 | 70 | 170 | - | 451 | 67 | 2 | 215 | 27 | 126 |

DRAWING DIMENSION - COMPLETE SET (GES-4M)

● Flange

Unit : mm

| Suction Bore | Discharge Bore | g1 | g2 | n1 | n2 |
|--------------|----------------|-----|-----|----|----|
| d1 | d2 | | | | |
| 40 | 32 | 105 | 100 | 4 | 4 |
| 50 | 40 | 120 | 105 | 4 | 4 |
| 65 | 50 | 140 | 120 | 4 | 4 |
| 80 | 65 | 150 | 140 | 8 | 4 |
| 100 | 80 | 175 | 150 | 8 | 8 |

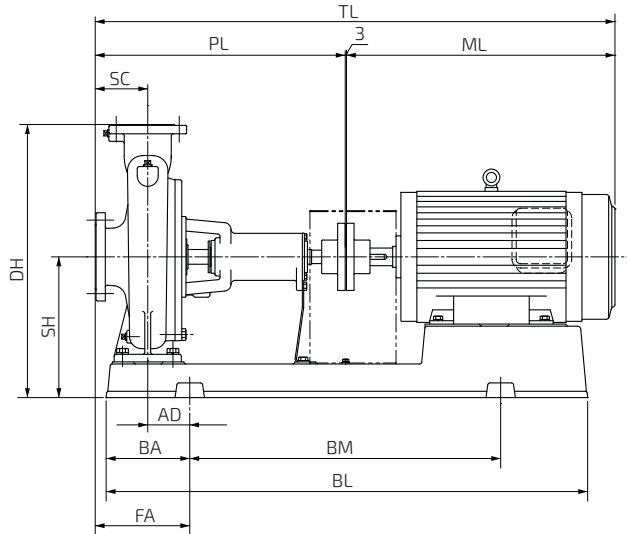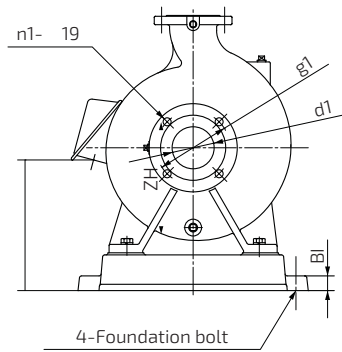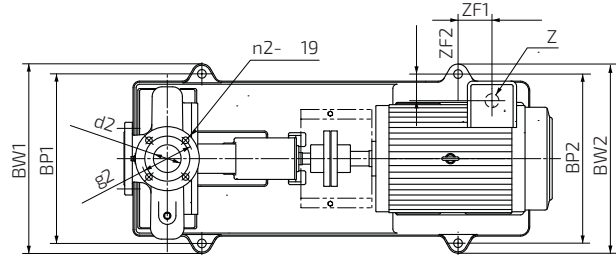

Unit : mm

| Suction d1 x Discharge d2 (mm) | Model | Motor (kW) | Pump | | Baseplate | | | | | | | |
|---|----------------|---------------|------|-----|-----------|------|-----|-----|-----|-----|-----|-----|
| | | | SC | PL | BI | BL | BA | BM | BP1 | BP2 | BW1 | BW2 |
| 40x32 | GES-405M-4M0.4 | 0.4 | 80 | 460 | 25 | 654 | 112 | 420 | 290 | 230 | 336 | 276 |
| | GES405M4ME0.75 | 0.75 | 80 | 460 | 25 | 733 | 122 | 480 | 290 | 290 | 336 | 336 |
| 50x40 | GES505M4ME0.75 | 0.75 | 100 | 460 | 25 | 733 | 122 | 480 | 320 | 320 | 366 | 366 |
| | GES505M4ME1.5 | 1.5 | 100 | 460 | 35 | 825 | 138 | 540 | 400 | 290 | 458 | 348 |
| | GES505M4ME2.2 | 2.2 | 100 | 460 | 35 | 825 | 138 | 540 | 400 | 290 | 458 | 348 |
| 65x50 | GES655M4ME1.5 | 1.5 | 100 | 460 | 25 | 731 | 122 | 480 | 320 | 320 | 366 | 366 |
| | GES655M4ME2.2 | 2.2 | 100 | 460 | 25 | 731 | 122 | 480 | 320 | 320 | 366 | 366 |
| | GES655M4ME3.7 | 3.7 | 100 | 460 | 35 | 823 | 138 | 540 | 400 | 320 | 458 | 378 |
| 80x65 | GES805M4ME2.2 | 2.2 | 100 | 460 | 35 | 825 | 138 | 540 | 400 | 290 | 458 | 348 |
| | GES805M4ME3.7 | 3.7 | 100 | 460 | 35 | 823 | 138 | 540 | 400 | 320 | 458 | 378 |
| | GES805M4ME5.5 | 5.5 | 100 | 570 | 35 | 923 | 158 | 600 | 440 | 350 | 498 | 408 |
| | GES805M4ME7.5 | 7.5 | 125 | 595 | 35 | 1029 | 180 | 660 | 490 | 350 | 548 | 408 |
| 100x80 | GES1005M4ME3.7 | 3.7 | 125 | 595 | 35 | 921 | 158 | 600 | 440 | 350 | 498 | 408 |
| | GES1005M4ME5.5 | 5.5 | 125 | 595 | 35 | 1029 | 180 | 660 | 490 | 350 | 548 | 408 |
| | GES1005M4ME7.5 | 7.5 | 125 | 595 | 35 | 1029 | 180 | 660 | 490 | 350 | 548 | 408 |
| | GES1005M4ME11 | 11 | 125 | 595 | 35 | 1146 | 199 | 740 | 490 | 400 | 548 | 458 |
| | GES1005M4ME15 | 15 | 125 | 595 | 35 | 1146 | 199 | 740 | 490 | 400 | 548 | 458 |




Continue to the next page

DRAWING DIMENSION - COMPLETE SET (GES-4M)

● Flange

Unit : mm


| Suction Bore | Discharge Bore | g1 | g2 | n1 | n2 |
|--------------|----------------|-----|-----|----|----|
| d1 | d2 | | | | |
| 40 | 32 | 105 | 100 | 4 | 4 |
| 50 | 40 | 120 | 105 | 4 | 4 |
| 65 | 50 | 140 | 120 | 4 | 4 |
| 80 | 65 | 150 | 140 | 8 | 4 |
| 100 | 80 | 175 | 150 | 8 | 8 |

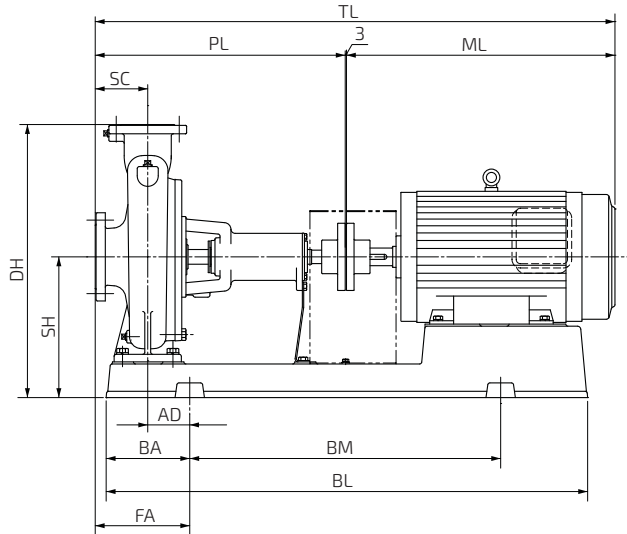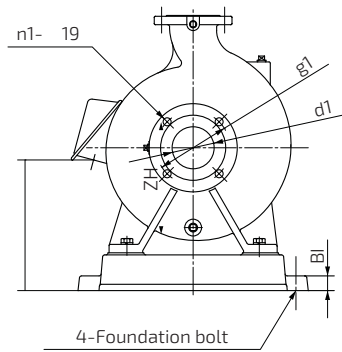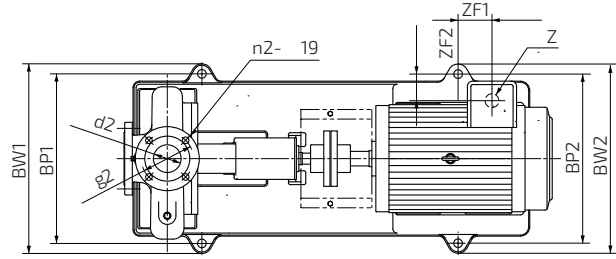

Unit : mm

| Suction d1 x Discharge d2 (mm) | Model | Motor (kW) | Combination | | | | | | Other | | | | Weight (kg) |
|---|----------------|---------------|-------------|-----|------|-----|-----|-----|-------|-----|-----|----|----------------|
| | | | DH | SH | TL | AD | FA | ML | ZF1 | ZF2 | ZH | Z | |
| 40x32 | GES-405M-4M0.4 | 0.4 | 395 | 215 | 679 | 45 | 125 | 236 | 23 | -12 | 184 | 22 | 53 |
| | GES405M4ME0.75 | 0.75 | 395 | 215 | 746 | 55 | 135 | 281 | 20 | 39 | 205 | 22 | 67 |
| 50x40 | GES505M4ME0.75 | 0.75 | 395 | 215 | 766 | 55 | 155 | 281 | 20 | 54 | 205 | 22 | 69 |
| | GES505M4ME1.5 | 1.5 | 470 | 245 | 842 | 55 | 155 | 316 | -44 | 27 | 205 | 28 | 83 |
| | GES505M4ME2.2 | 2.2 | 470 | 245 | 842 | 55 | 155 | 357 | -7 | 20 | 205 | 28 | 94 |
| 65x50 | GES655M4ME1.5 | 1.5 | 415 | 215 | 779 | 55 | 155 | 316 | 17 | 42 | 175 | 28 | 74 |
| | GES655M4ME2.2 | 2.2 | 425 | 225 | 820 | 55 | 155 | 357 | 53 | 35 | 185 | 28 | 88 |
| | GES655M4ME3.7 | 3.7 | 470 | 245 | 840 | 55 | 155 | 373 | 7 | 22 | 205 | 28 | 109 |
| 80x65 | GES805M4ME2.2 | 2.2 | 470 | 245 | 842 | 55 | 155 | 357 | -7 | 20 | 205 | 28 | 97 |
| | GES805M4ME3.7 | 3.7 | 470 | 245 | 840 | 55 | 155 | 373 | 7 | 22 | 205 | 28 | 102 |
| | GES805M4ME5.5 | 5.5 | 515 | 265 | 1001 | 60 | 160 | 428 | 111 | 4 | 210 | 36 | 146 |
| | GES805M4ME7.5 | 7.5 | 590 | 310 | 1064 | 80 | 205 | 466 | 69 | 4 | 255 | 36 | 184 |
| 100x80 | GES1005M4ME3.7 | 3.7 | 495 | 245 | 971 | 75 | 200 | 373 | 37 | 37 | 205 | 28 | 129 |
| | GES1005M4ME5.5 | 5.5 | 590 | 310 | 1054 | 80 | 205 | 428 | 31 | 4 | 255 | 36 | 173 |
| | GES1005M4ME7.5 | 7.5 | 590 | 310 | 1064 | 80 | 205 | 466 | 69 | 4 | 255 | 36 | 182 |
| | GES1005M4ME11 | 11 | 650 | 335 | 1172 | 100 | 225 | 563 | 58 | -17 | 272 | 52 | 242 |
| | GES1005M4ME15 | 15 | 650 | 335 | 1193 | 100 | 225 | 595 | 90 | -17 | 272 | 52 | 265 |

DRAWING DIMENSION - COMPLETE SET (GES-C)

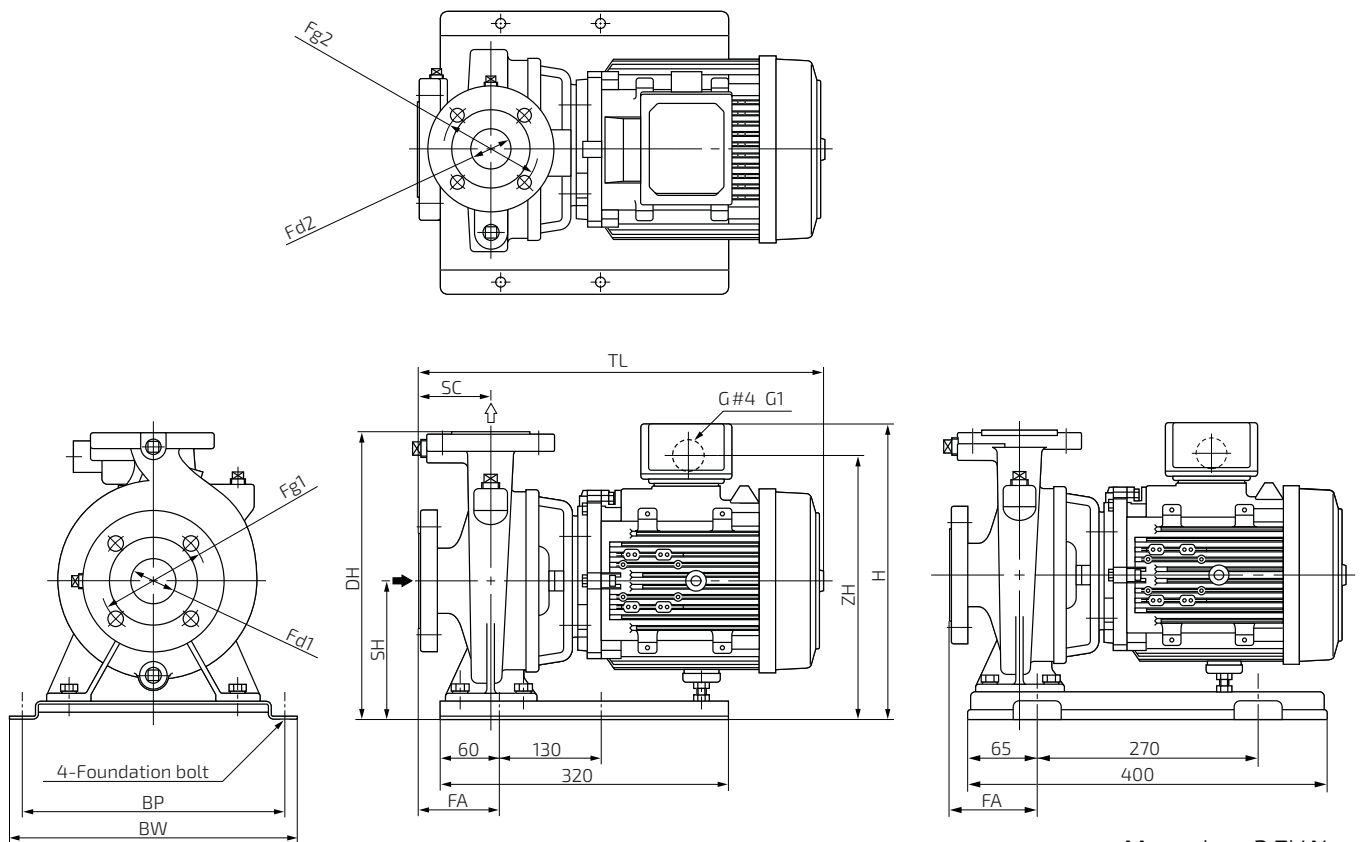

More than 3.7kW

Recommended foundation bolt size : M10 x 125 < >...More than 5.5kW




Unit : mm

| Suction (mm) | Discharge (mm) | Model | Motor (kW) | Pump Dimention | | | | | | | | | Flange | | | | Weight (kg) |
|--------------|----------------|----------------|------------|----------------|-----|-----|-----|-----|-----|-----|-----|-----|--------|----|-----|-----|-------------|
| | | | | SC | TL | DH | SH | FA | H | BP | BW | ZH | d1 | d2 | g1 | g2 | |
| 40 | 32 | GES405CE0.75T4 | 0.75 | 65 | 414 | 272 | 132 | 87 | 275 | 230 | 260 | 241 | 40 | 32 | 105 | 100 | 25 |
| | | GES405CE1.5T4 | 1.5 | 80 | 452 | 312 | 152 | 80 | - | 290 | 320 | 272 | 40 | 32 | 105 | 100 | 35 |
| | | GES405CE2.2T4 | 2.2 | 80 | 447 | 312 | 152 | 80 | 319 | 290 | 320 | 284 | 40 | 32 | 105 | 100 | 41 |
| 50 | 40 | GES505CE1.5T4 | 1.5 | 80 | 457 | 272 | 132 | 80 | 287 | 230 | 260 | 252 | 50 | 40 | 120 | 105 | 34 |
| | | GES505CE2.2T4 | 2.2 | 80 | 452 | 312 | 152 | 80 | 319 | 290 | 320 | 284 | 50 | 40 | 120 | 105 | 43 |
| | | GES505CE3.7T4 | 3.7 | 80 | 492 | 327 | 167 | 85 | 334 | 290 | 324 | 299 | 50 | 40 | 120 | 105 | 51 |
| | | GES505CE5.5T4 | 5.5 | 80 | 559 | 375 | 195 | 85 | 389 | 290 | 324 | 353 | 50 | 40 | 120 | 105 | 73 |
| 65 | 50 | GES655CE3.7T4 | 3.7 | 80 | 492 | 327 | 167 | 85 | 334 | 290 | 324 | 299 | 65 | 50 | 140 | 120 | 52 |
| | | GES655CE5.5T4 | 5.5 | 100 | 579 | 375 | 195 | 105 | 389 | 350 | 384 | 353 | 65 | 50 | 140 | 120 | 75 |
| | | GES655CE7.5T4 | 7.5 | 100 | 595 | 375 | 195 | 105 | 400 | 350 | 384 | 365 | 65 | 50 | 140 | 120 | 94 |

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES405M2ME0.75




■ PERFORMANCE CURVES

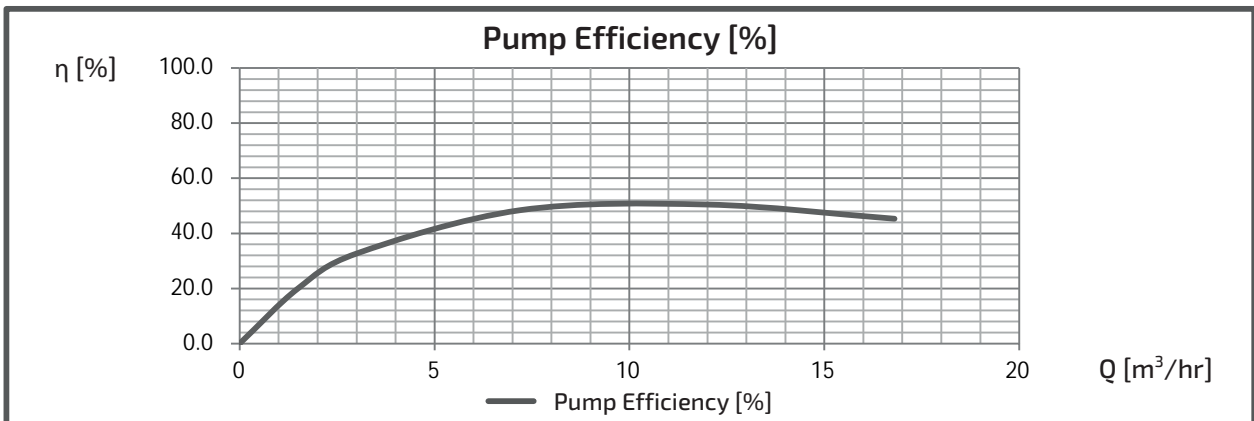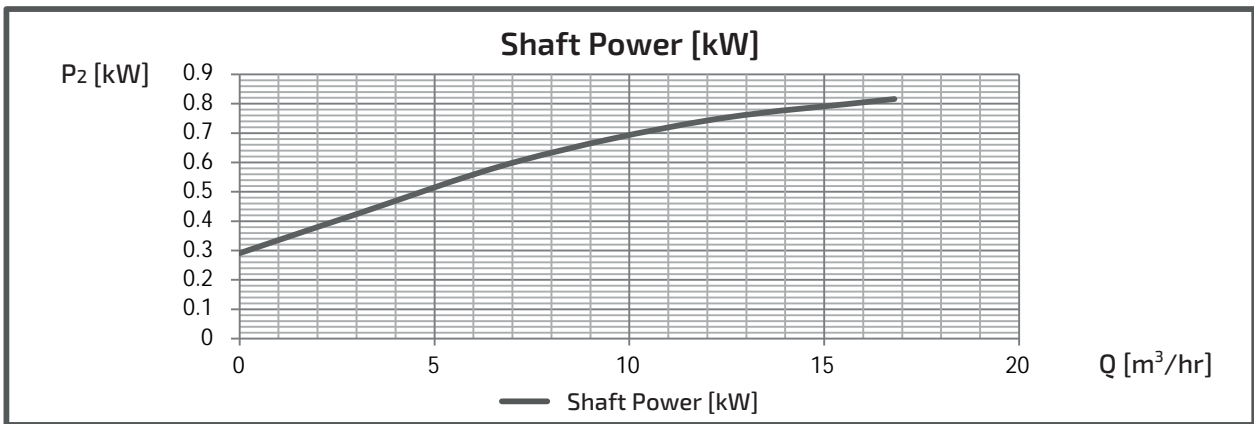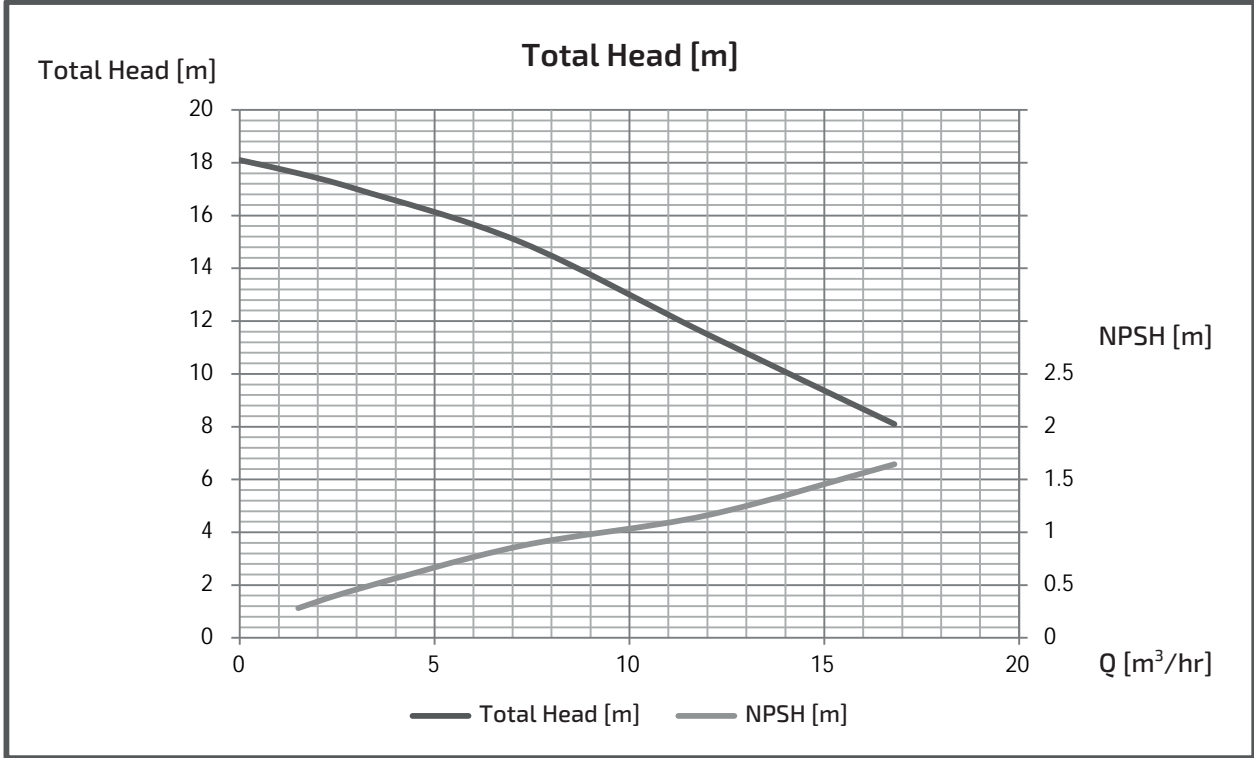

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES405M2ME1.5




■ PERFORMANCE CURVES

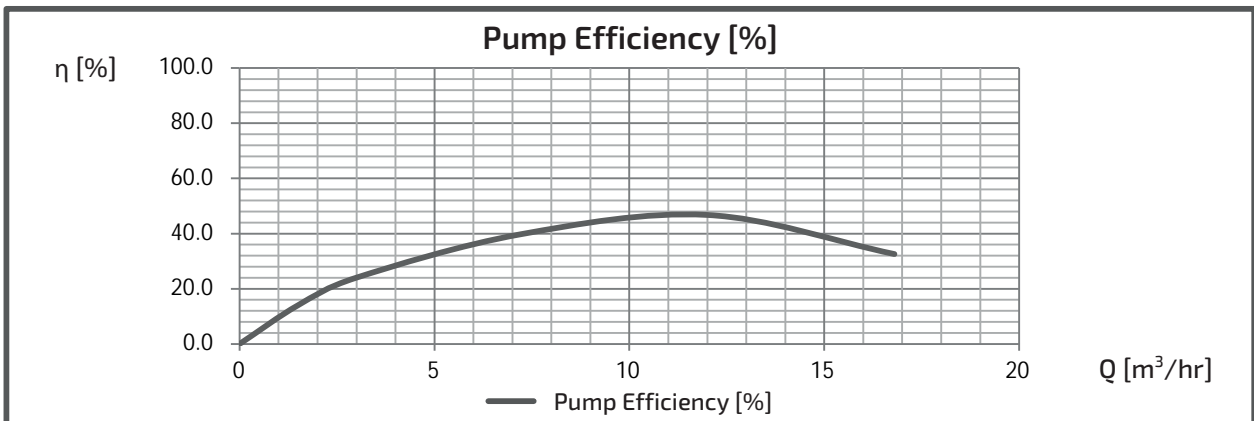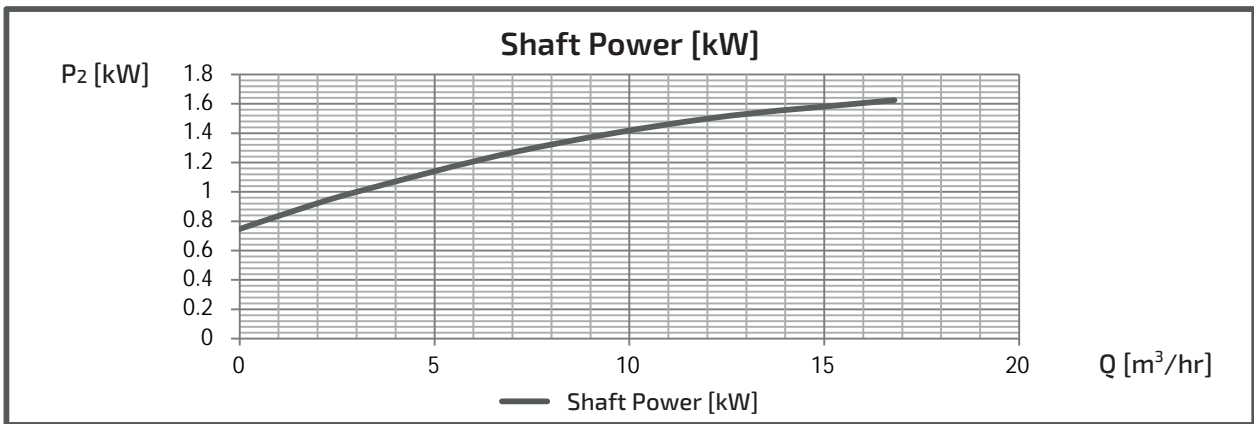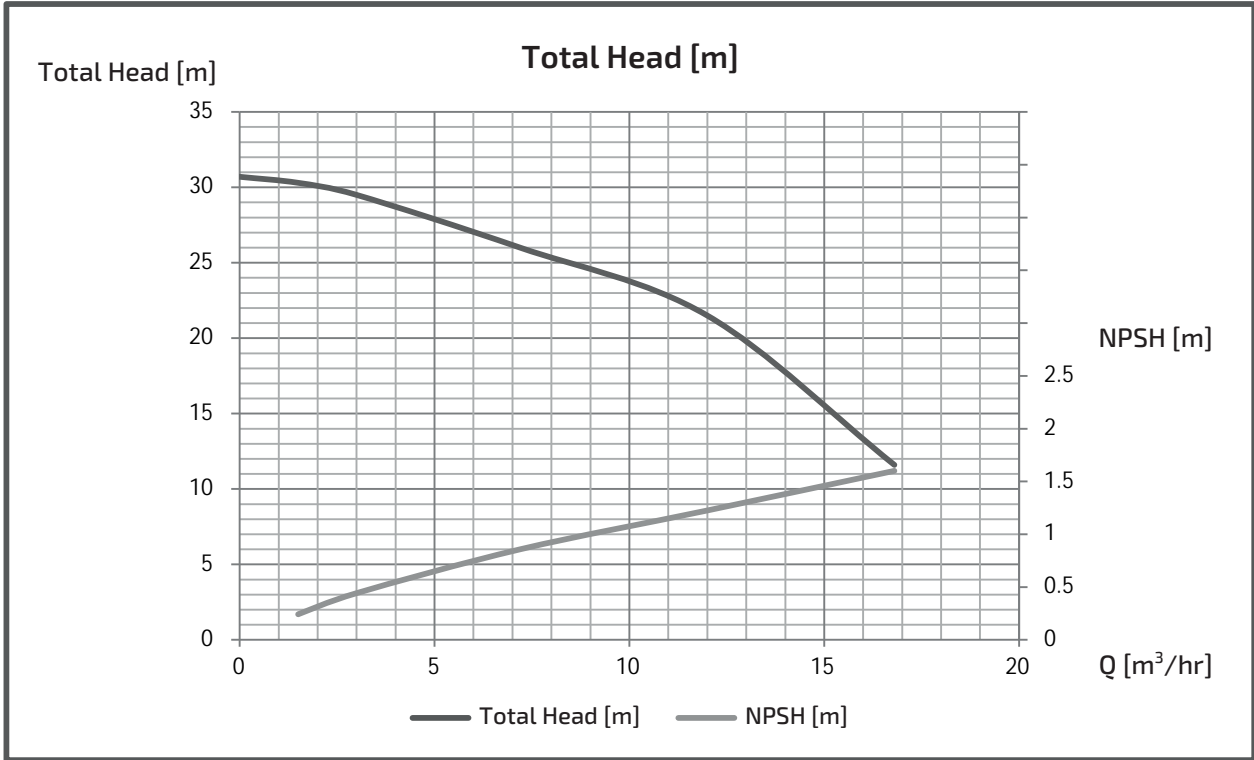

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES405M2ME2.2




■ PERFORMANCE CURVES

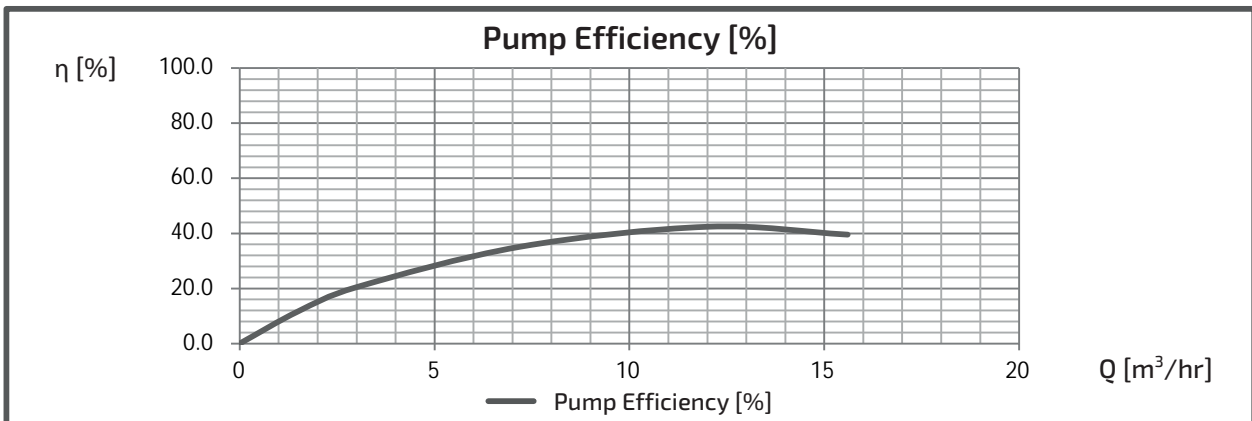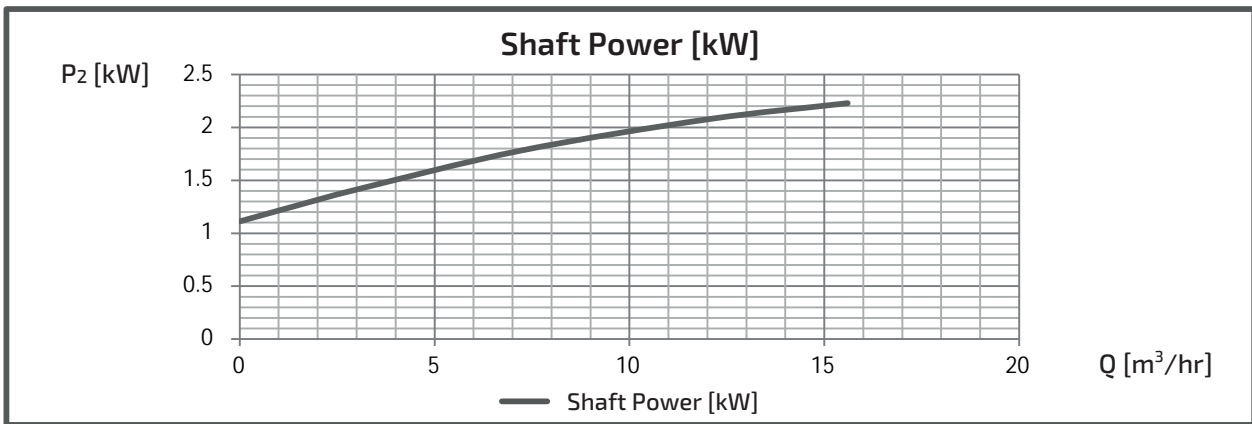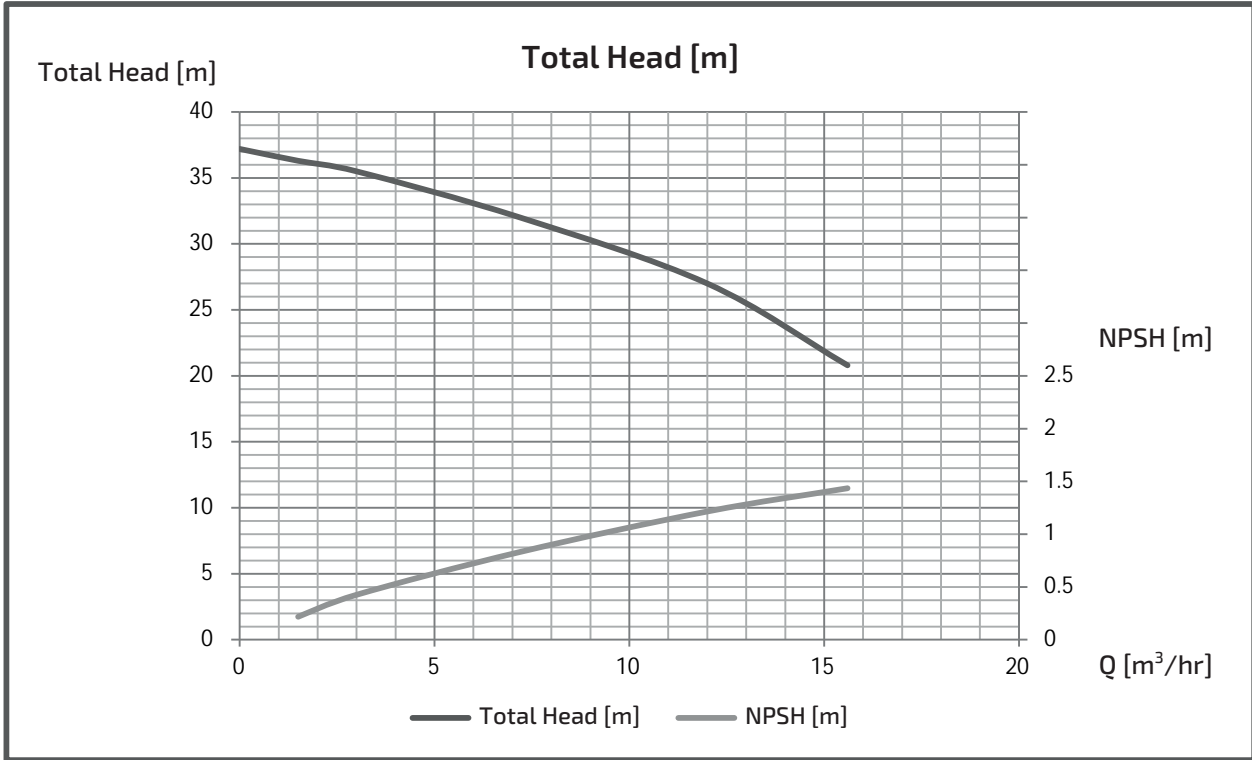

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES505M2ME1.5




■ PERFORMANCE CURVES

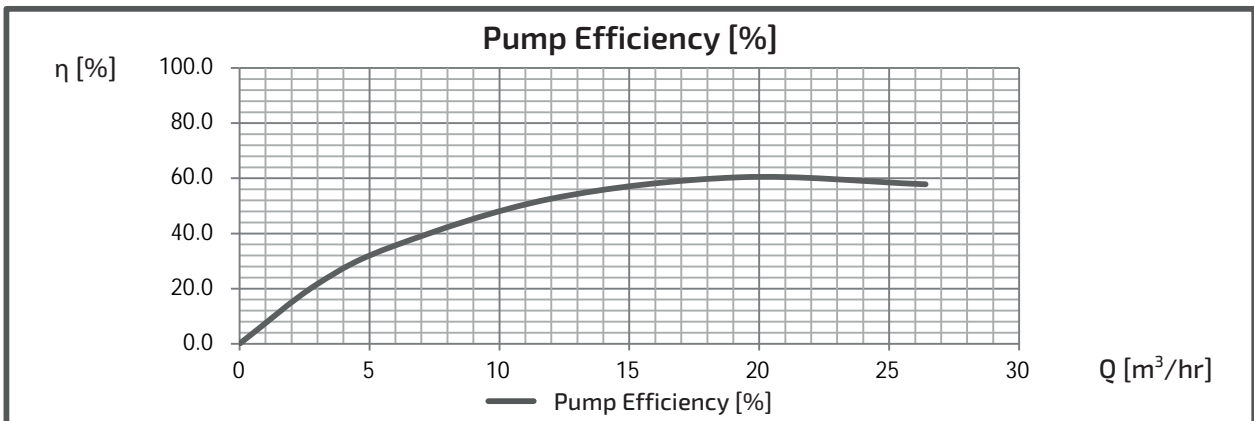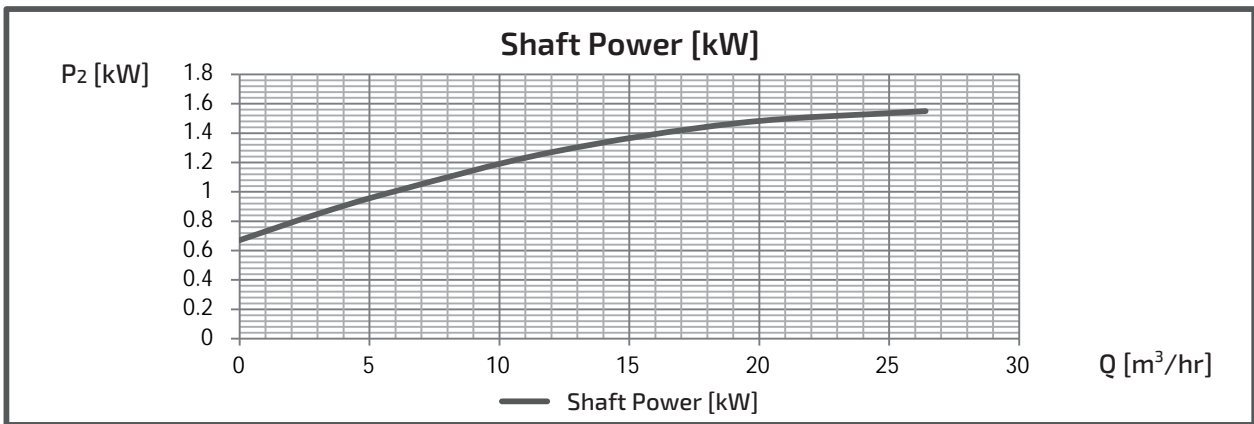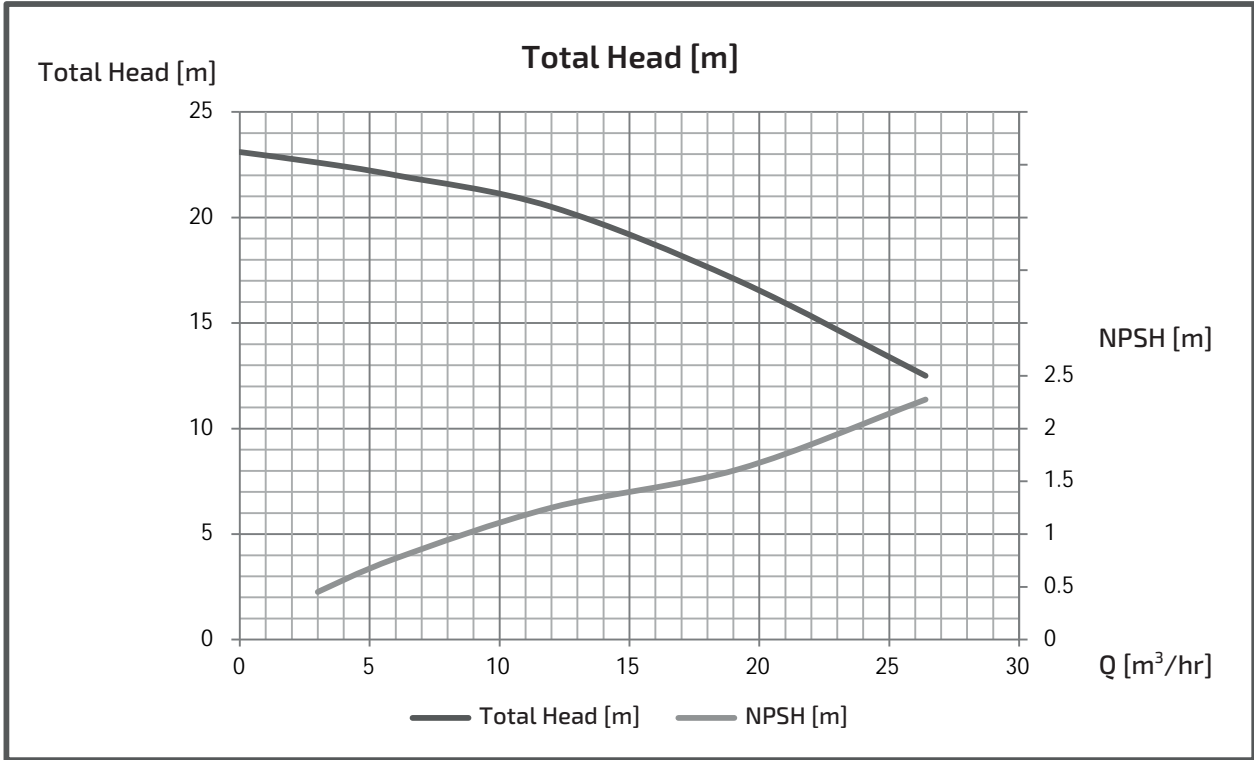

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES505M2ME2.2




■ PERFORMANCE CURVES

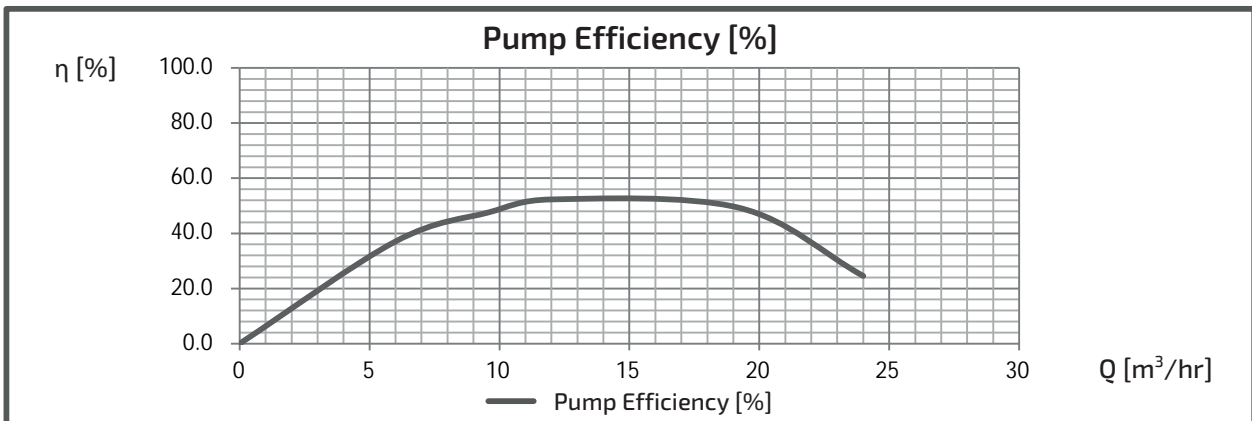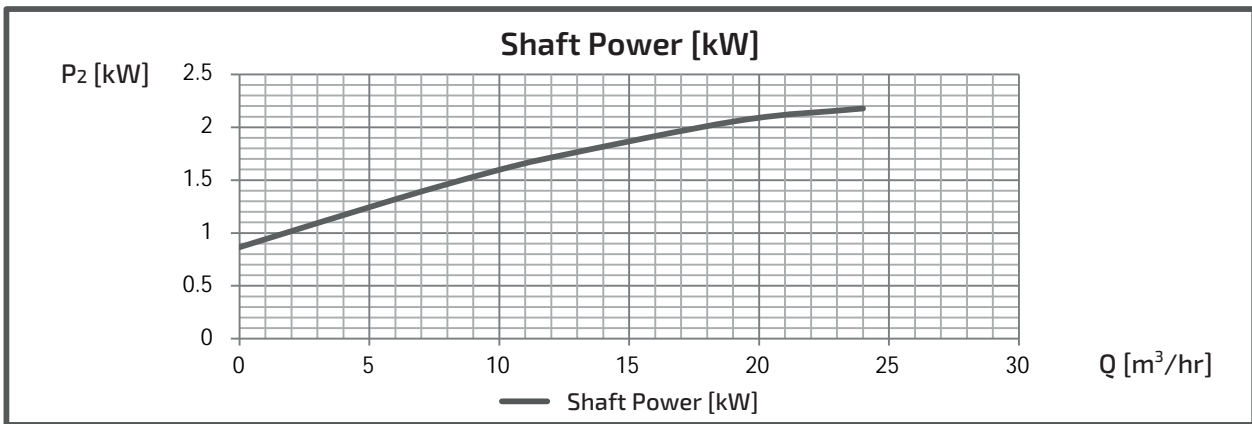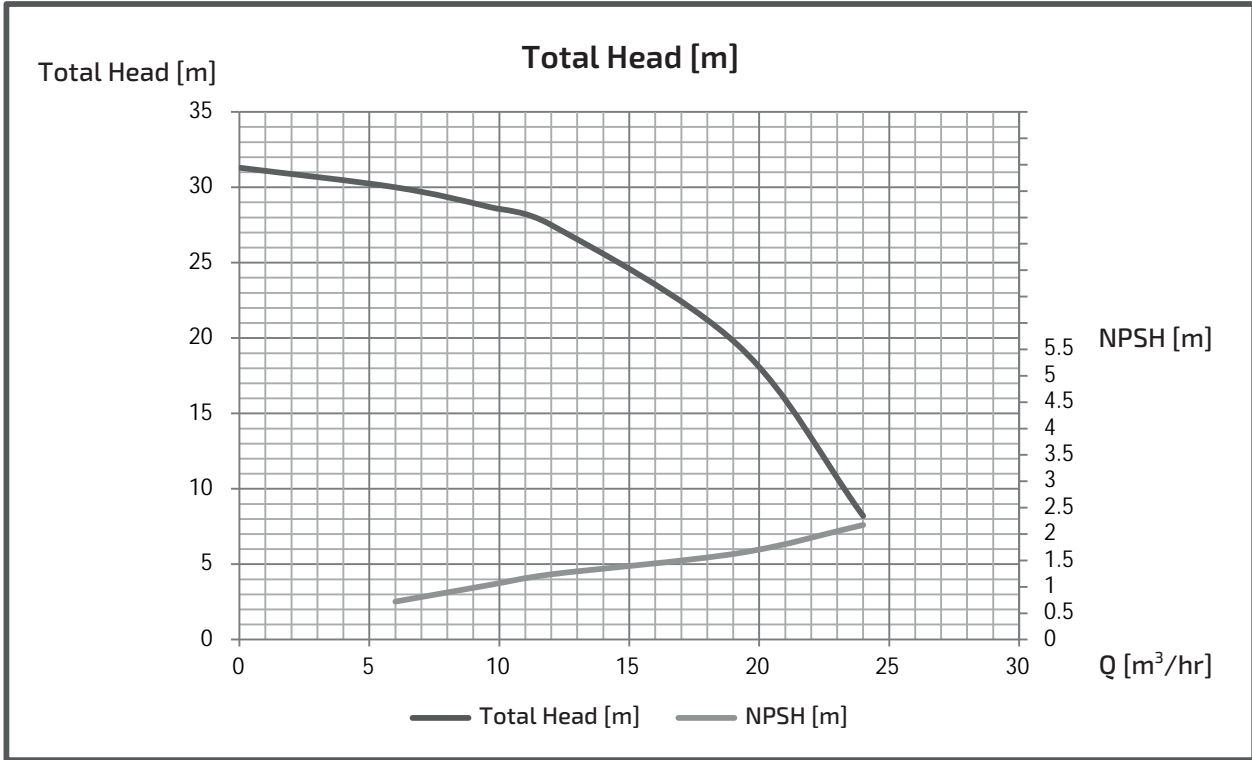

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES505M2ME3.7




■ PERFORMANCE CURVES

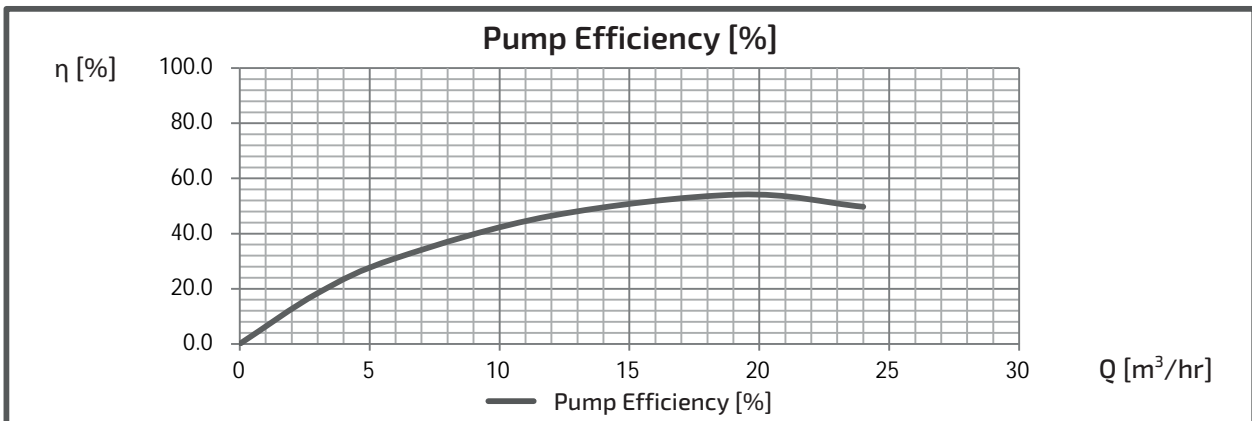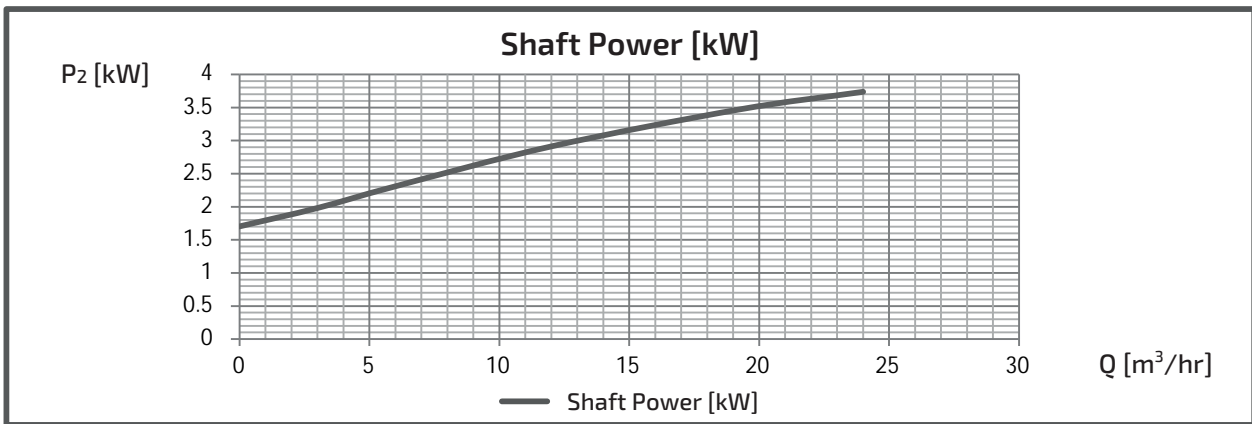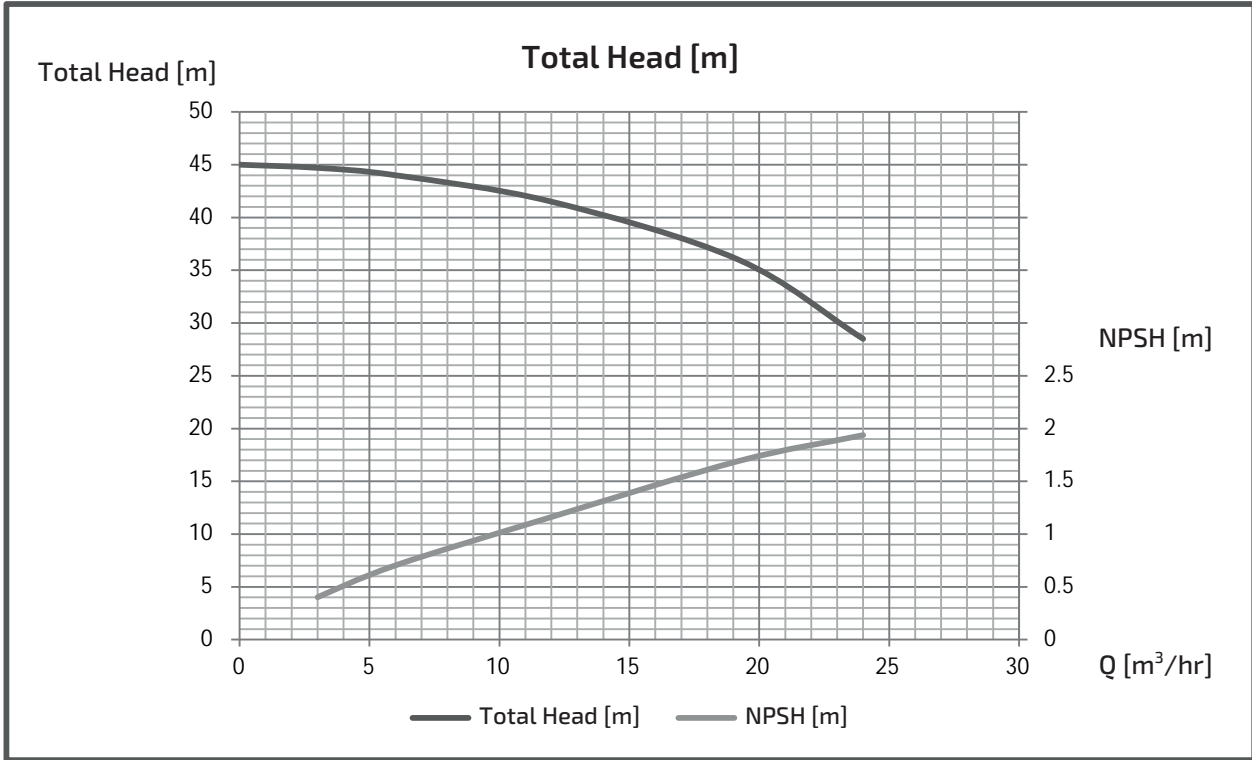

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES505M2ME5.5




■ PERFORMANCE CURVES

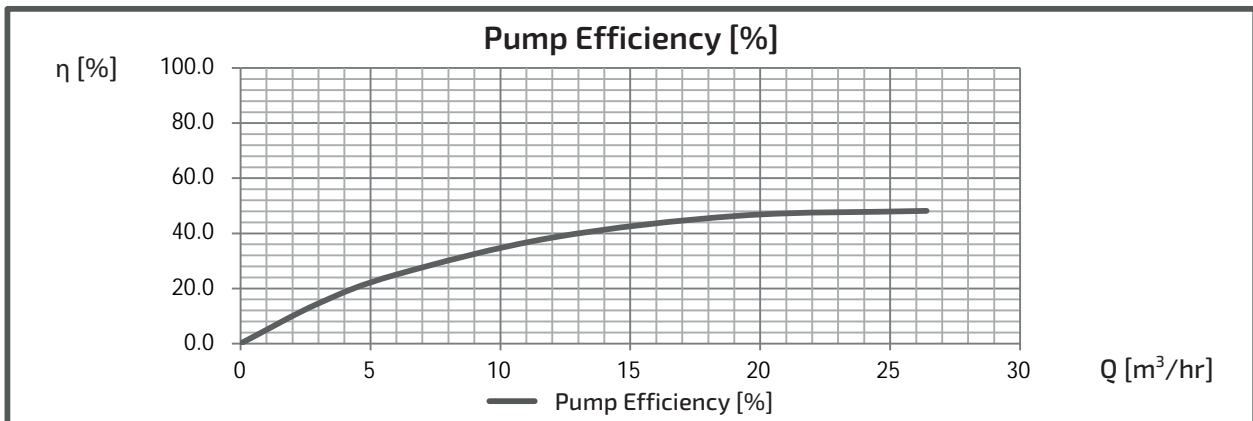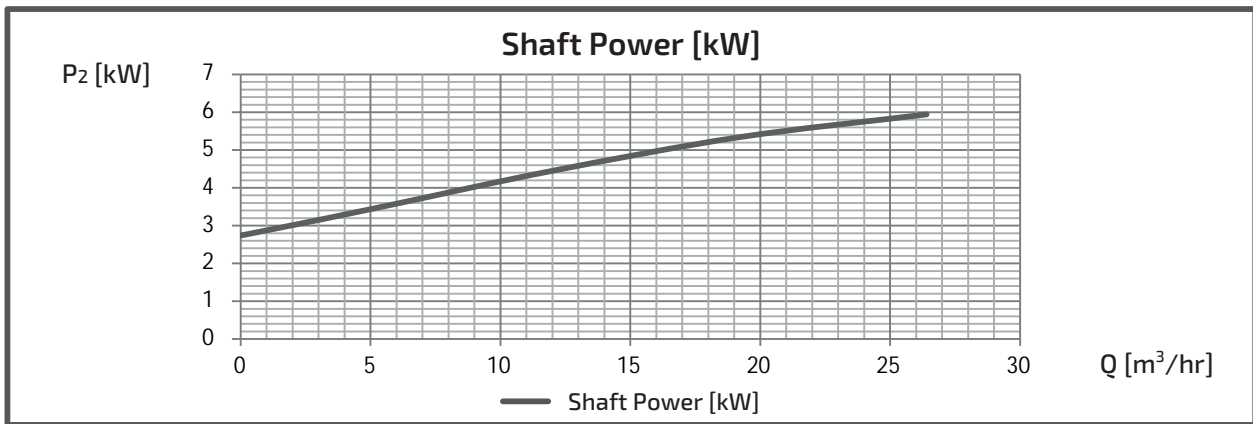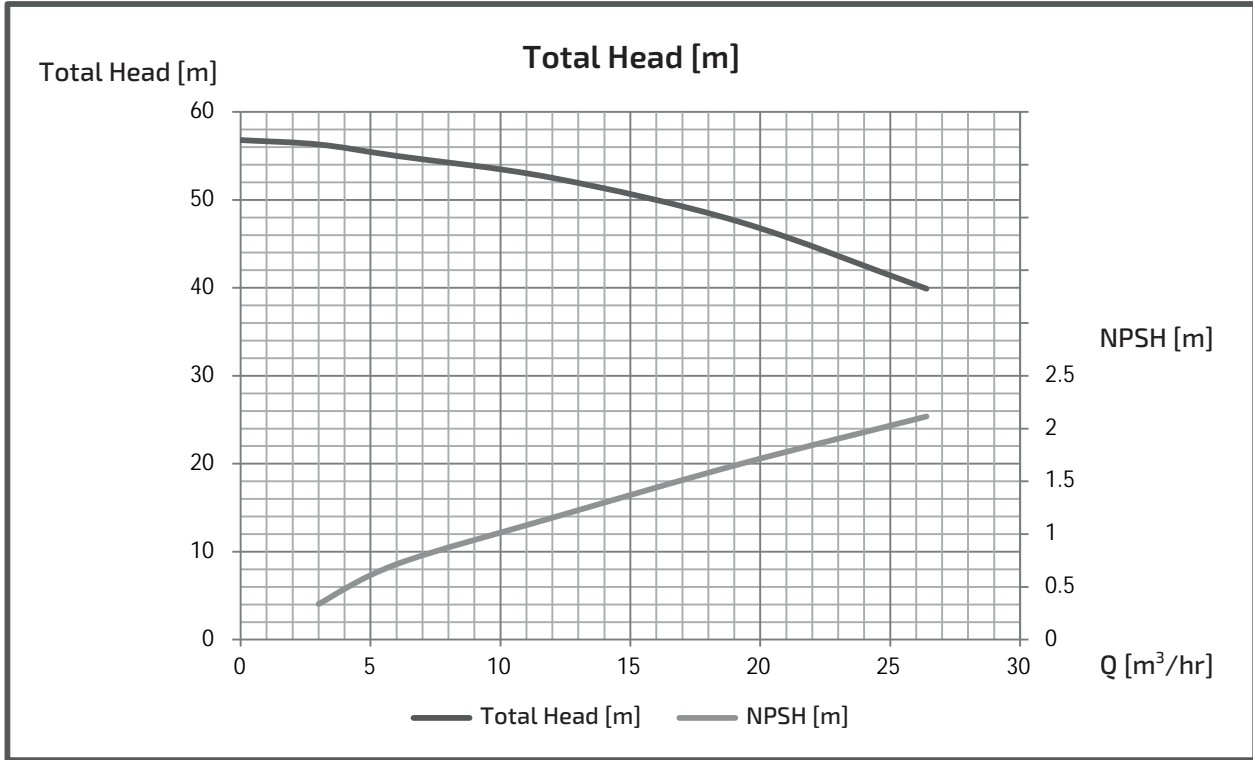

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES655M2ME3.7




■ PERFORMANCE CURVES

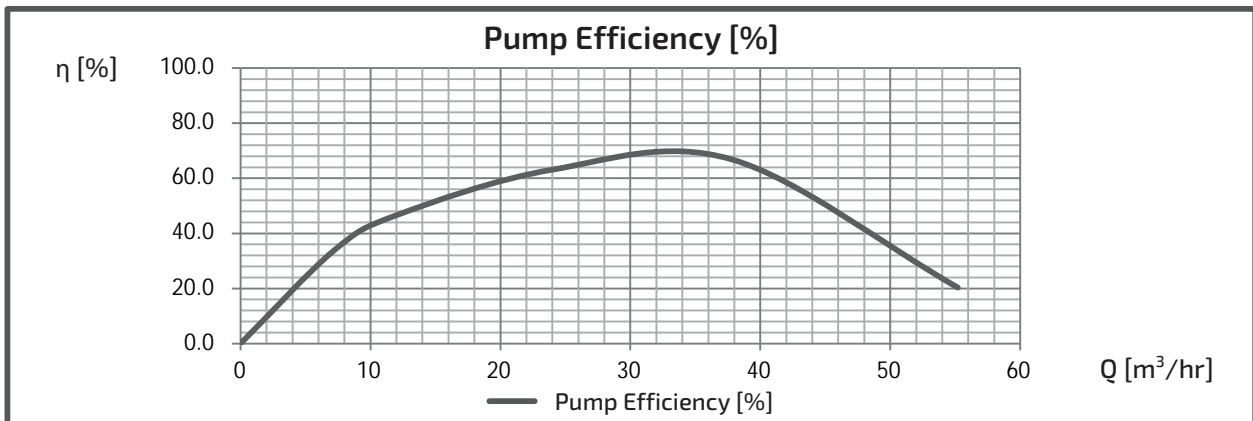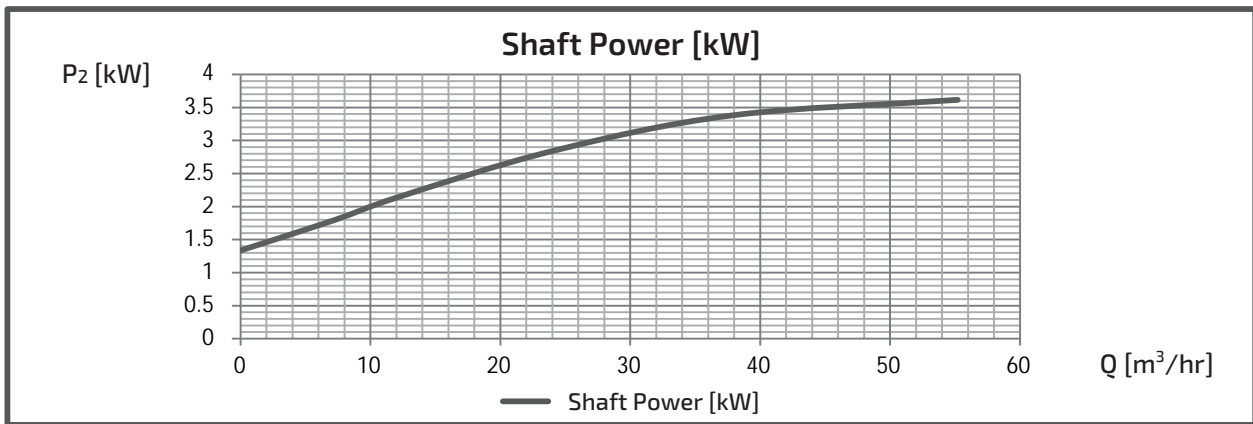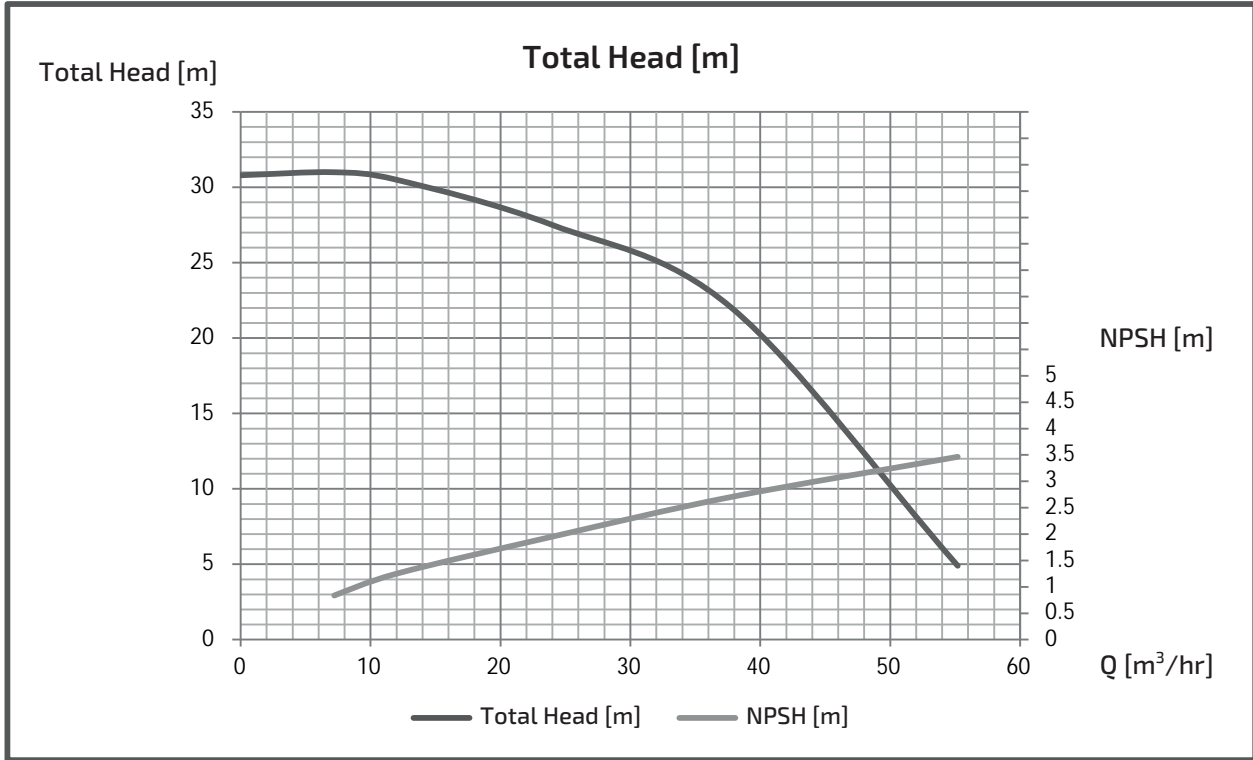

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES655M2ME5.5




■ PERFORMANCE CURVES

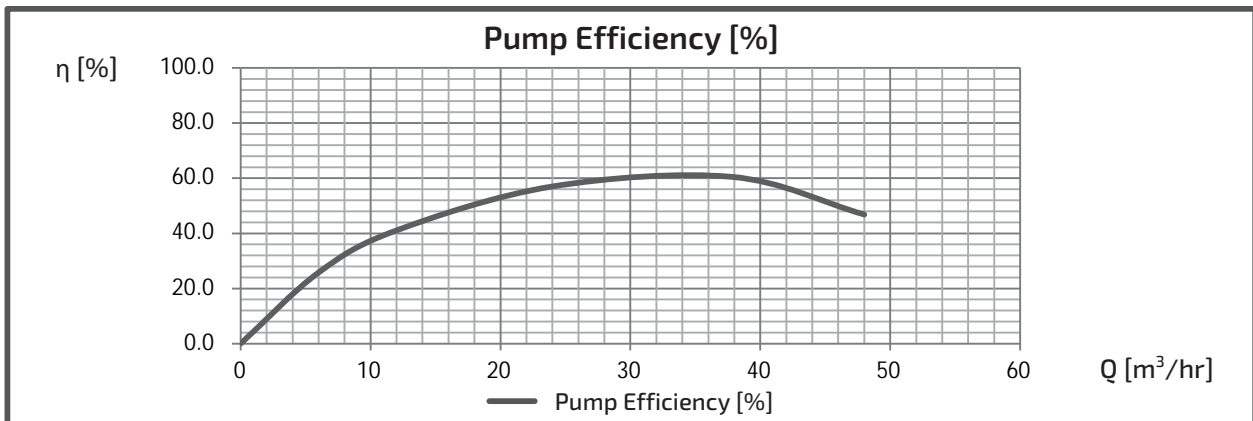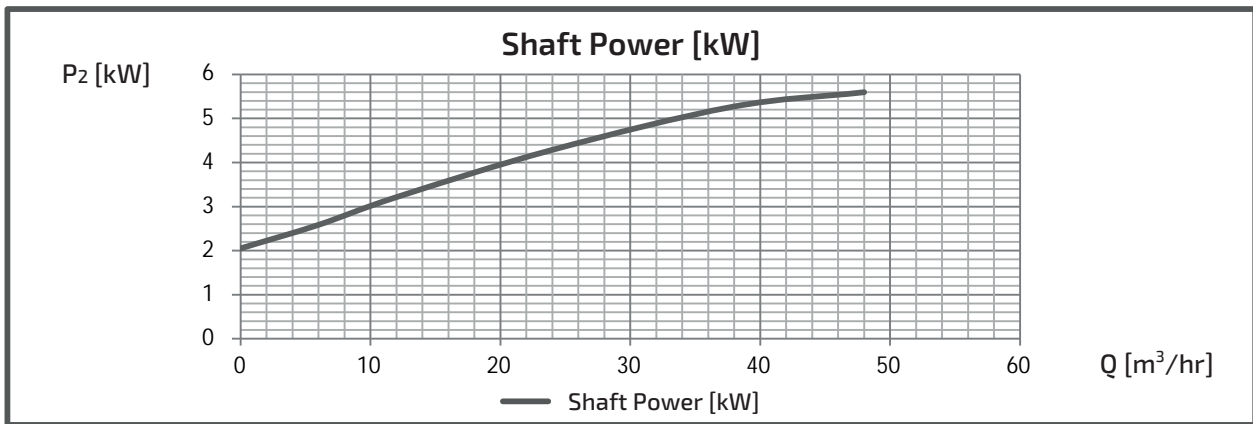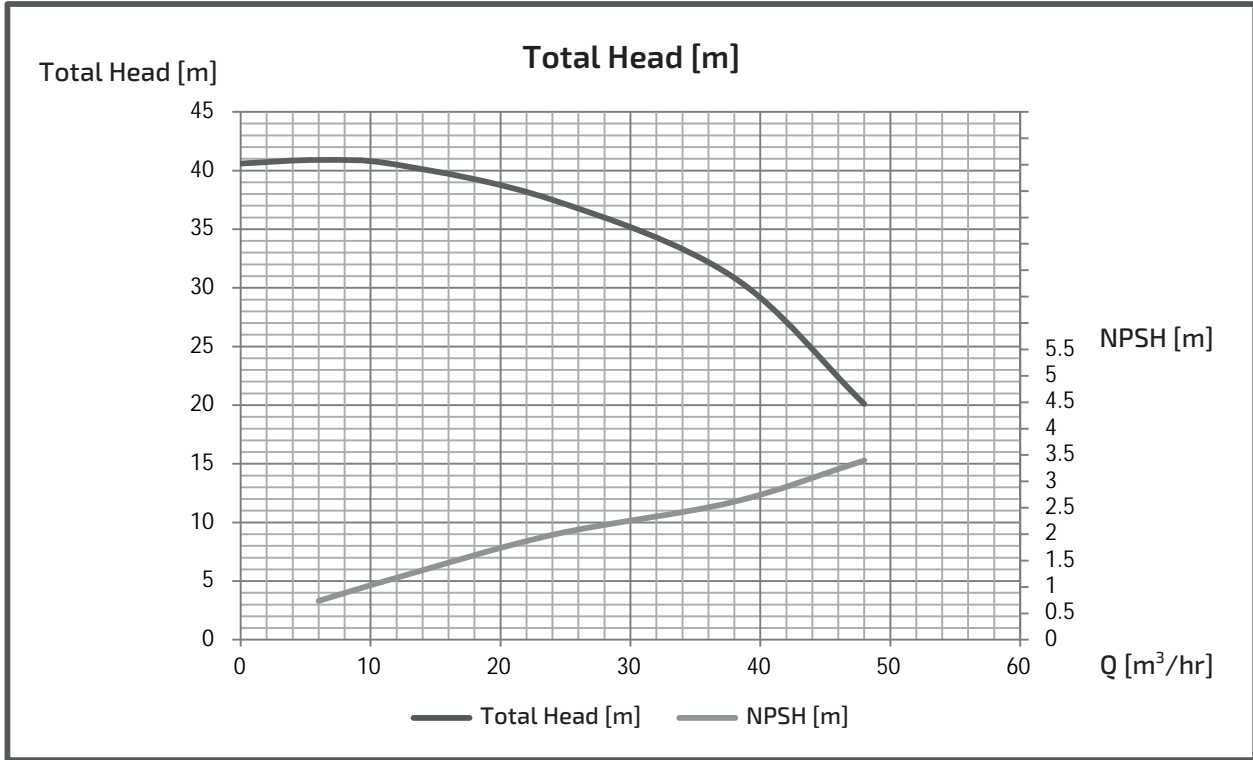

EXPECTED PERFORMANCE CURVE (GES-2M)

MODEL : GES655M2ME7.5




■ PERFORMANCE CURVES

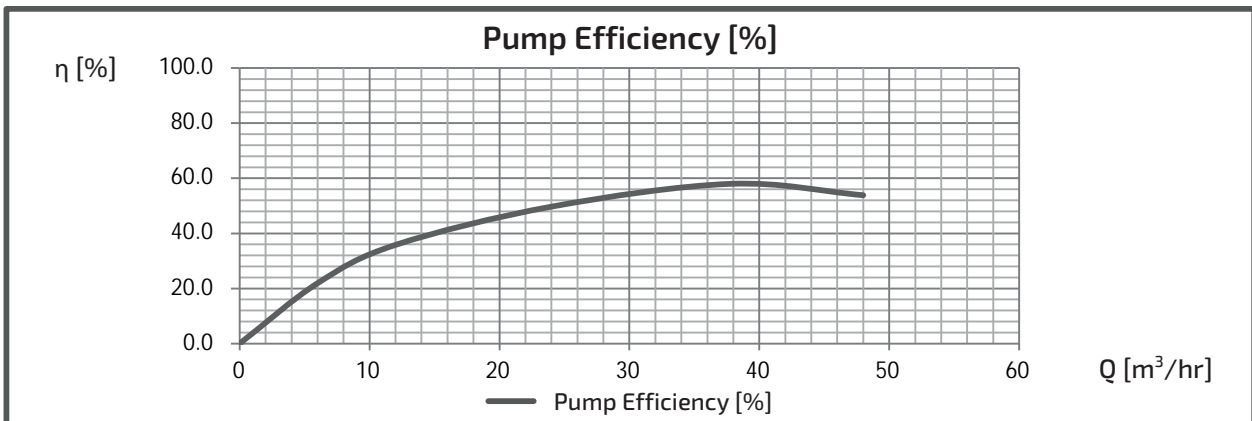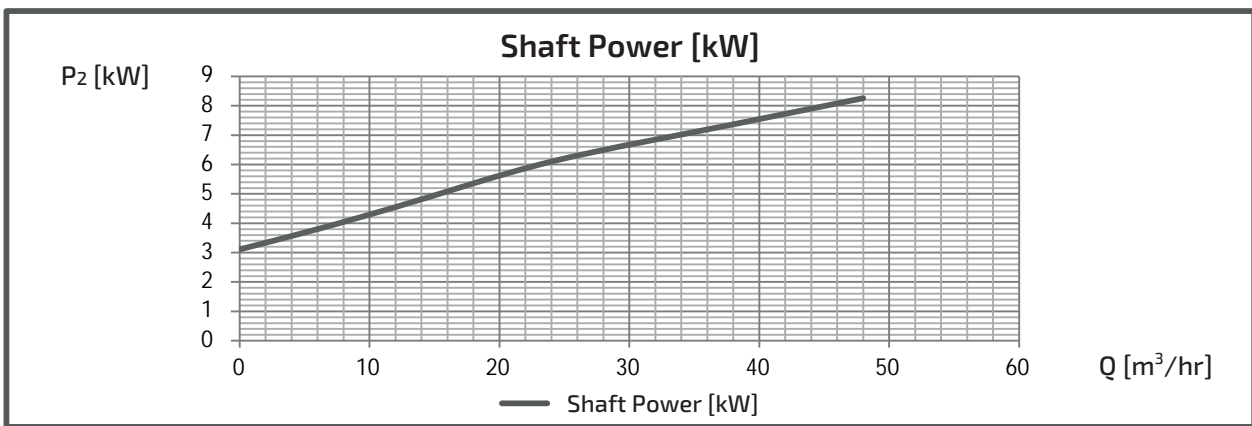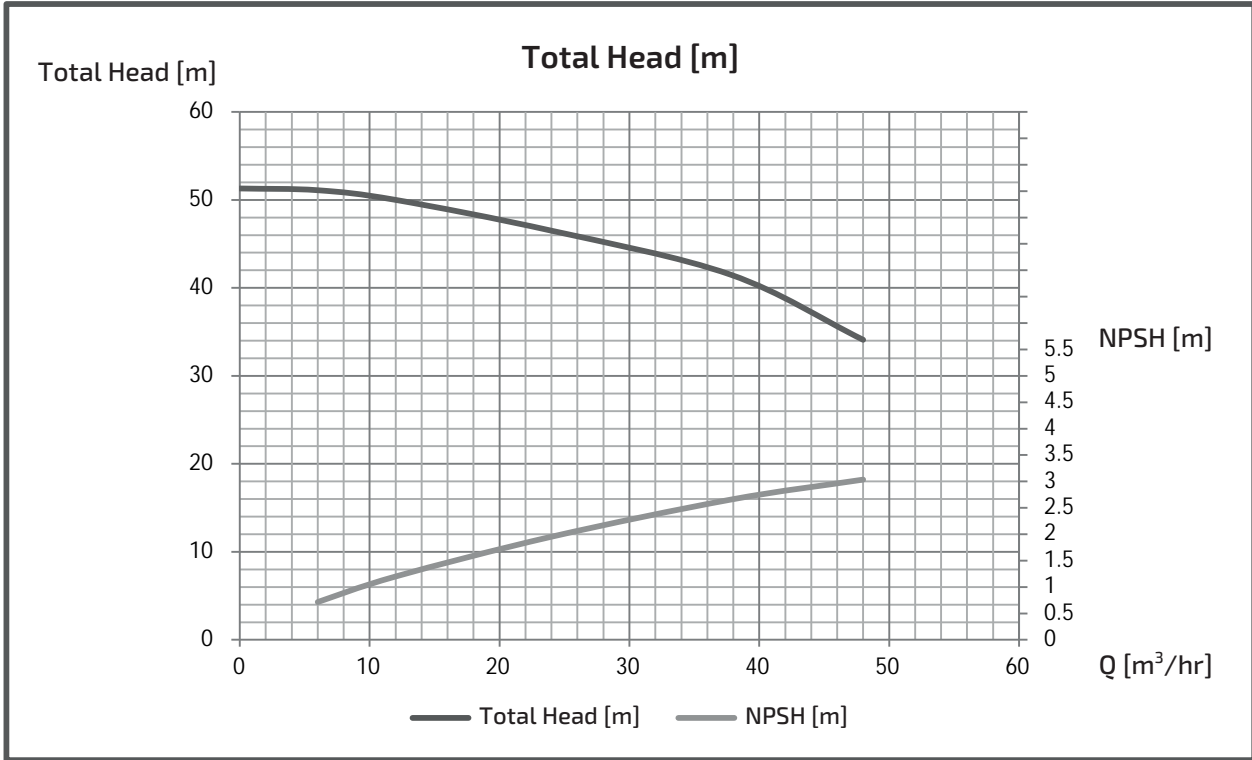

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES-405M-4M0.4




■ PERFORMANCE CURVES

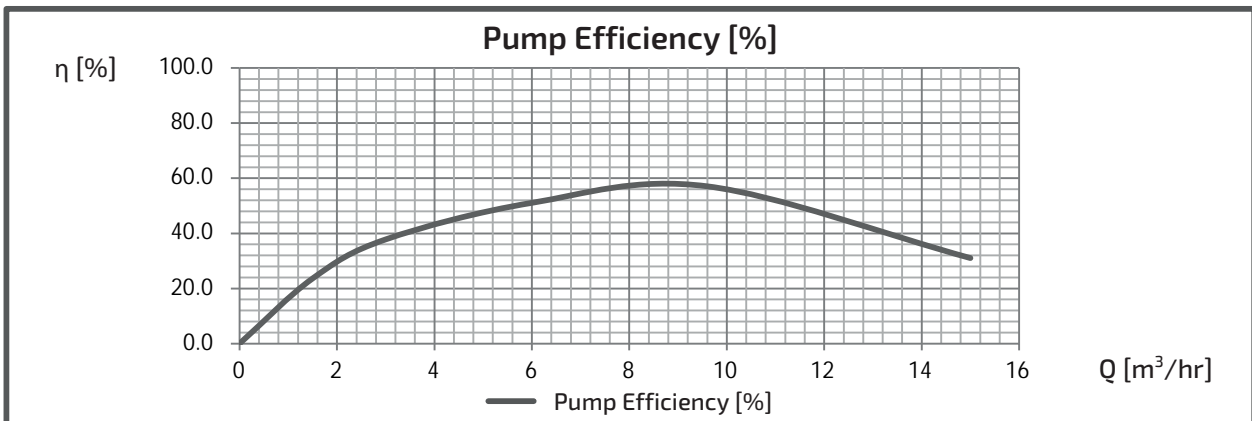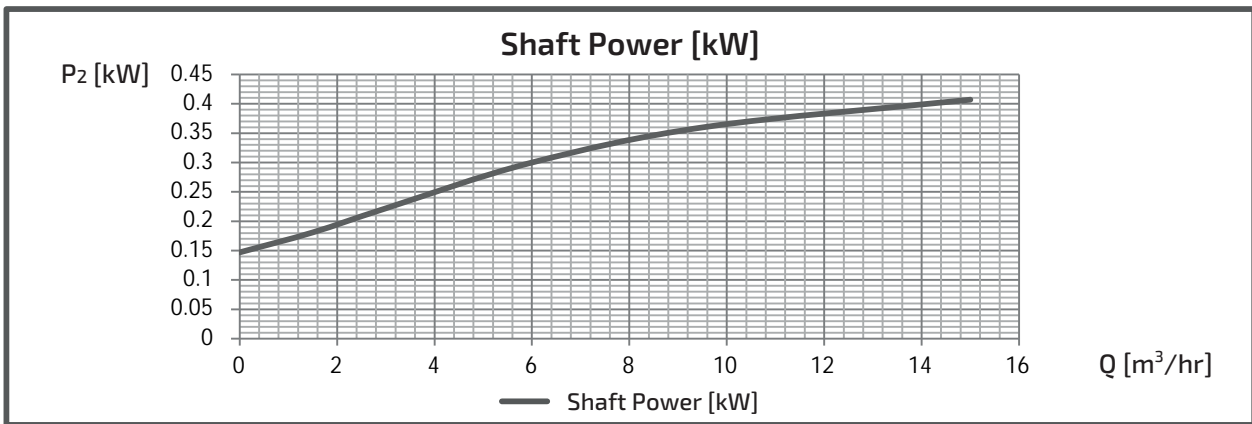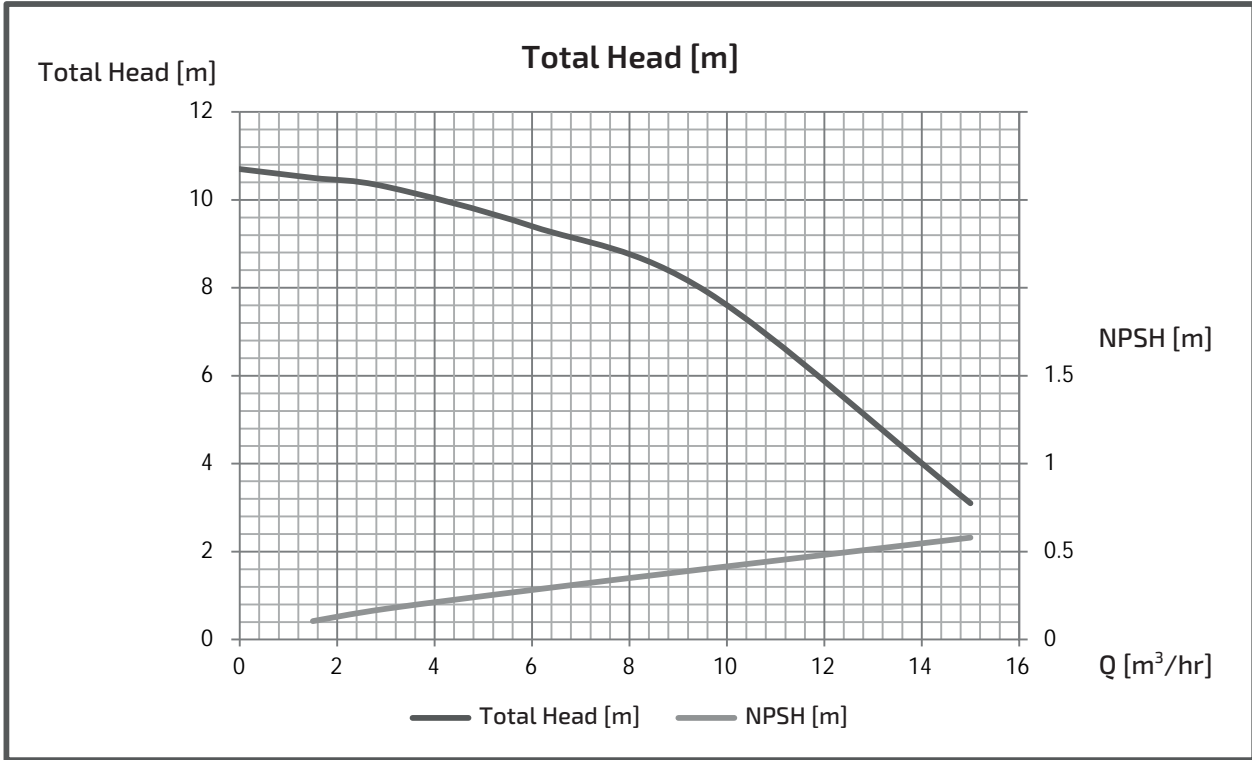

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES405M4ME0.75




■ PERFORMANCE CURVES

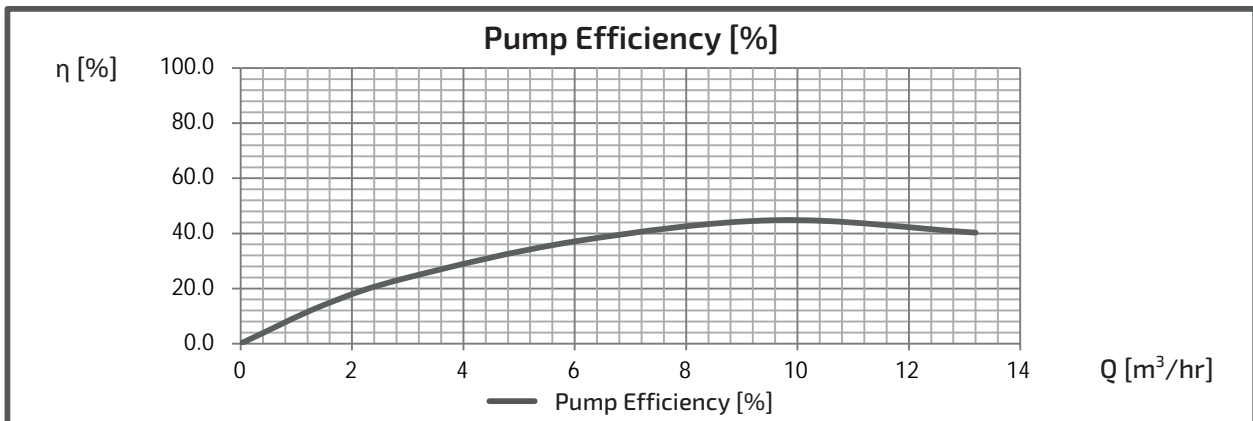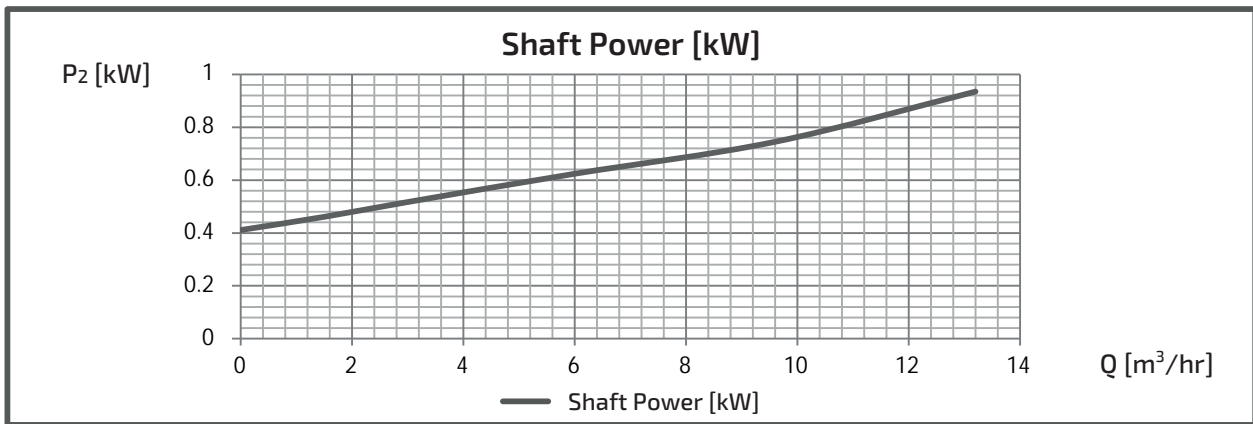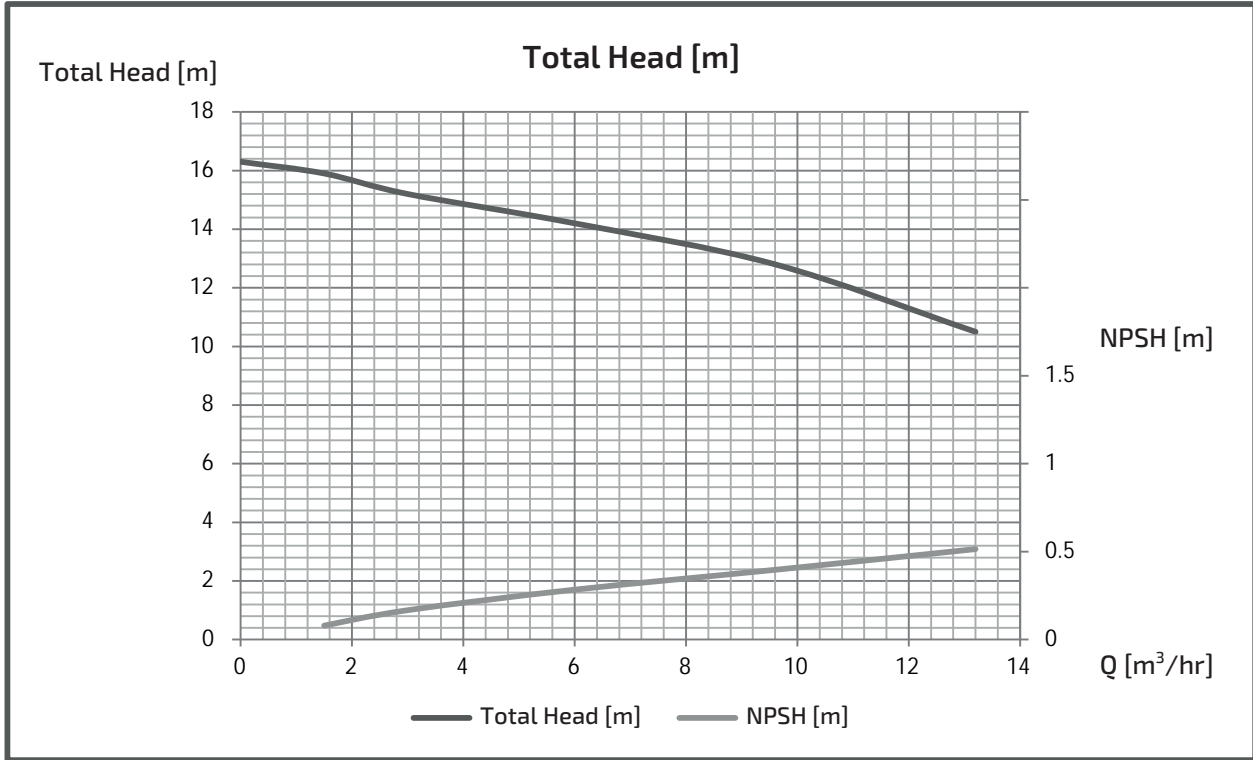

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES505M4ME0.75




■ PERFORMANCE CURVES

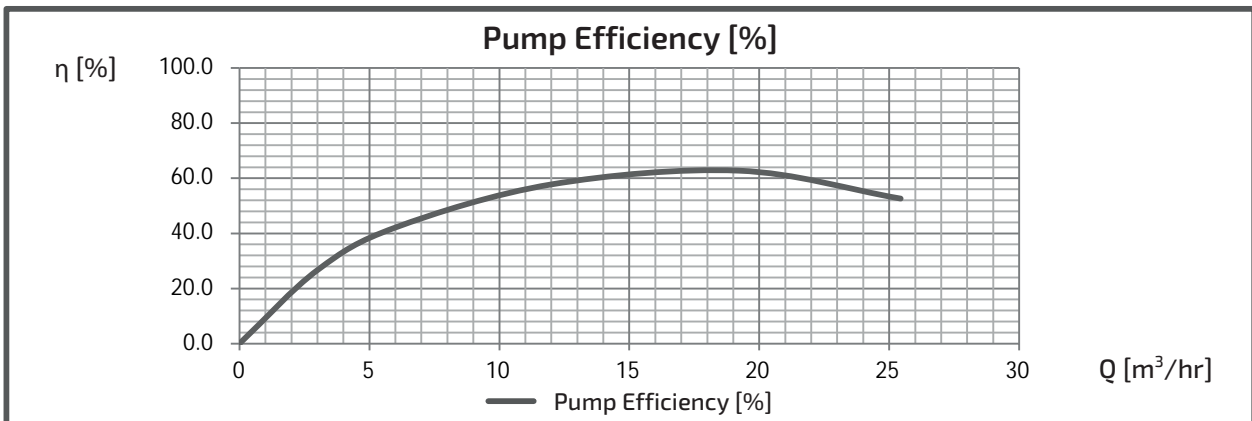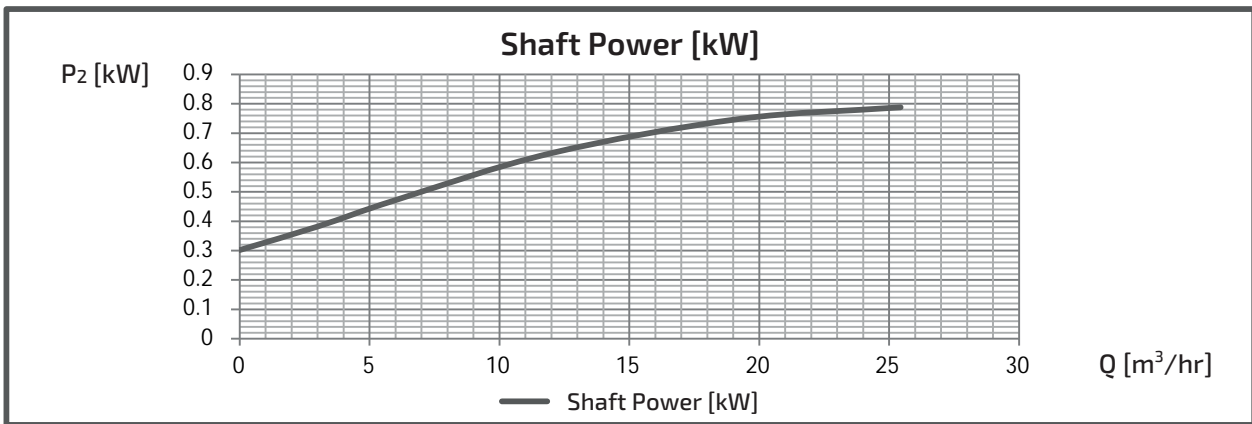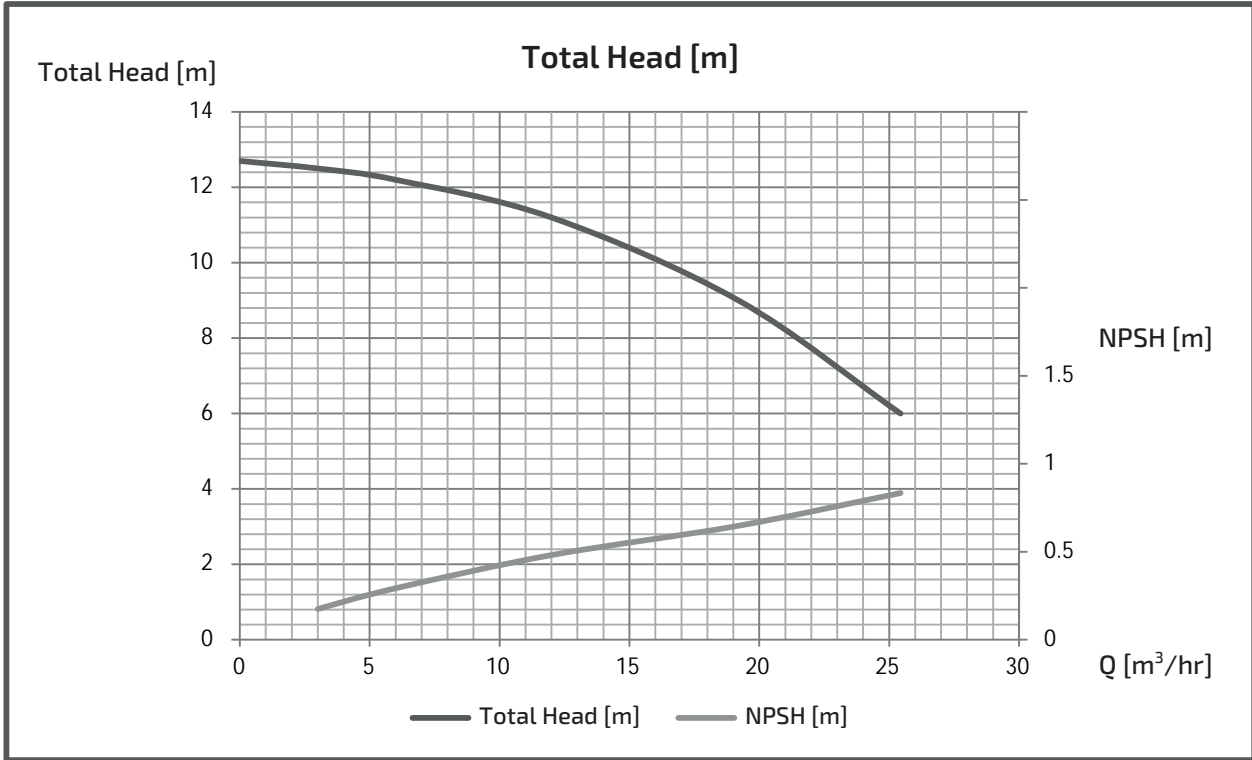

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES505M4ME1.5




■ PERFORMANCE CURVES

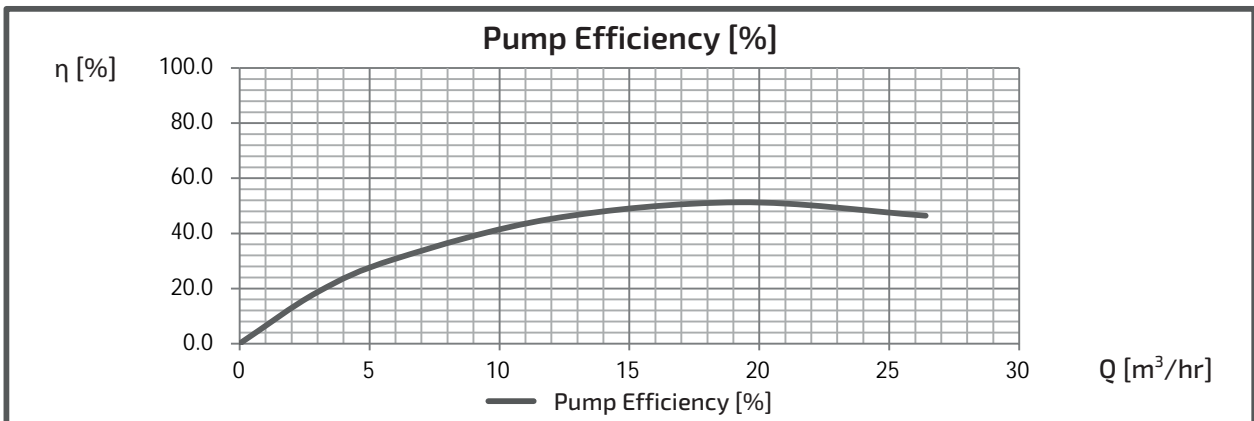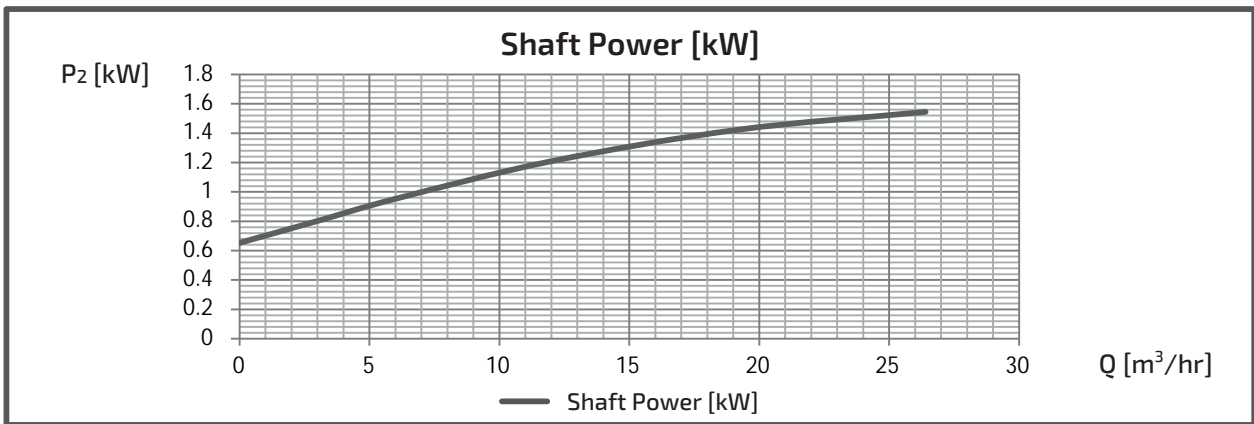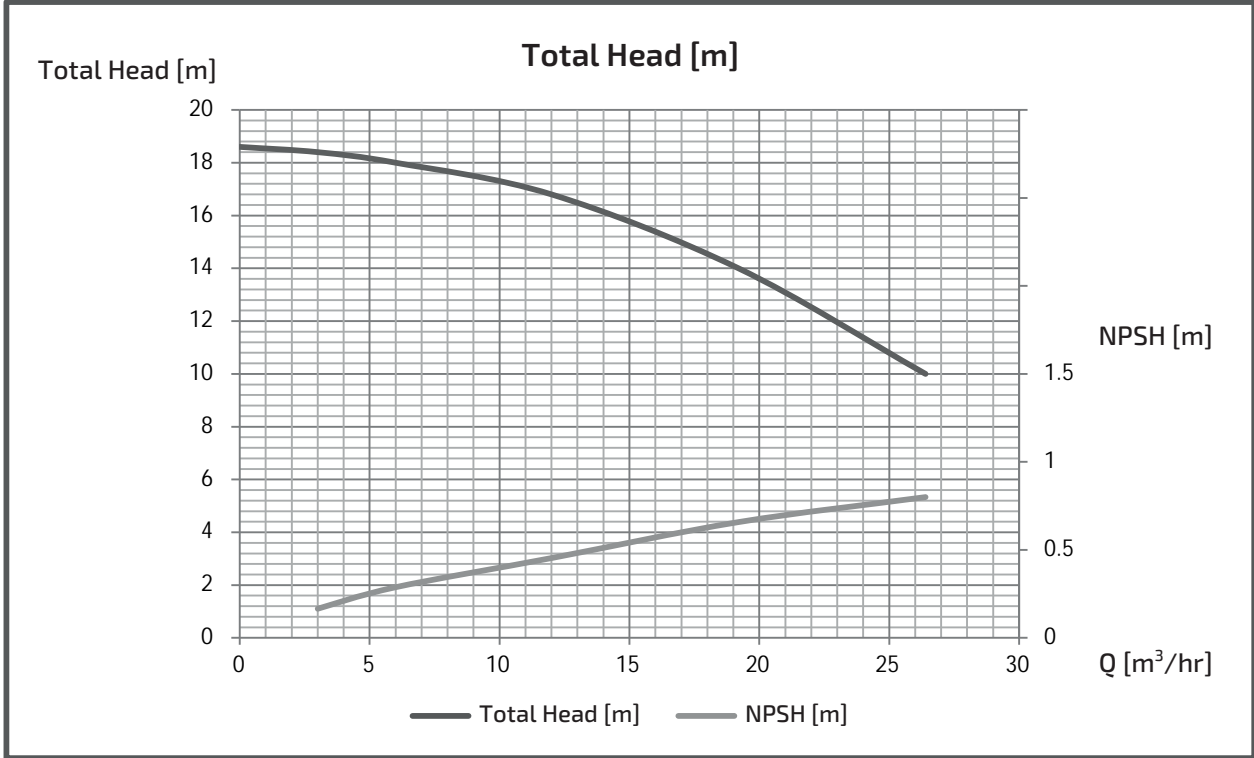

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES505M4ME2.2




■ PERFORMANCE CURVES

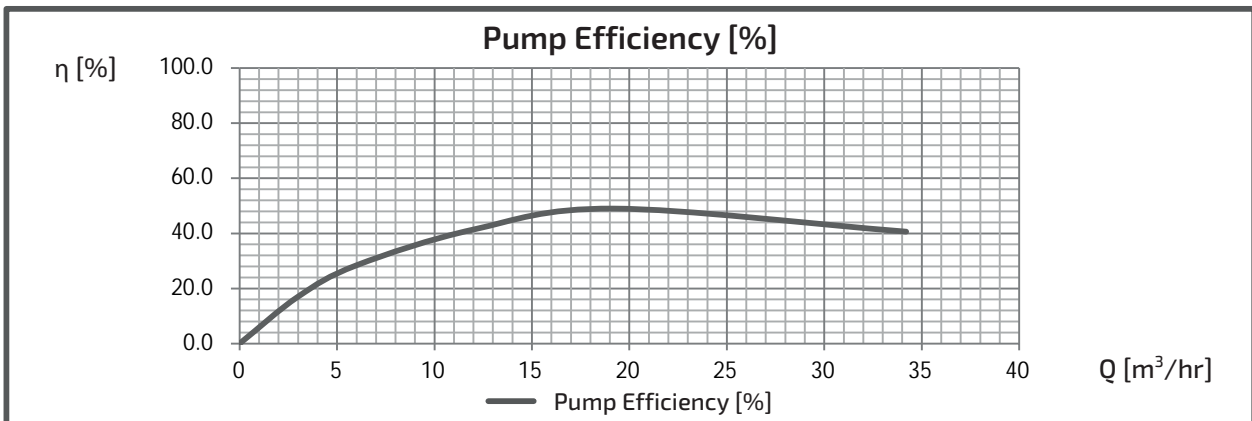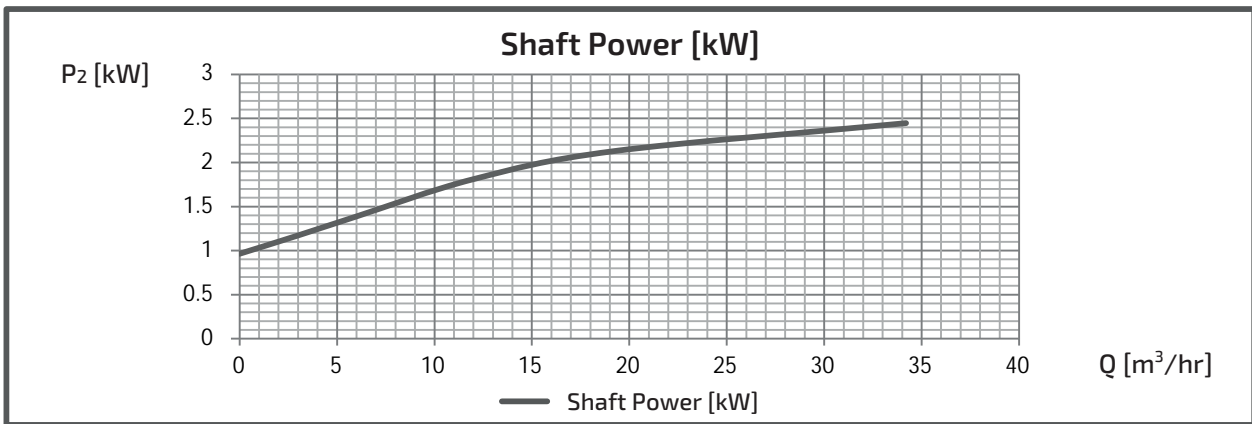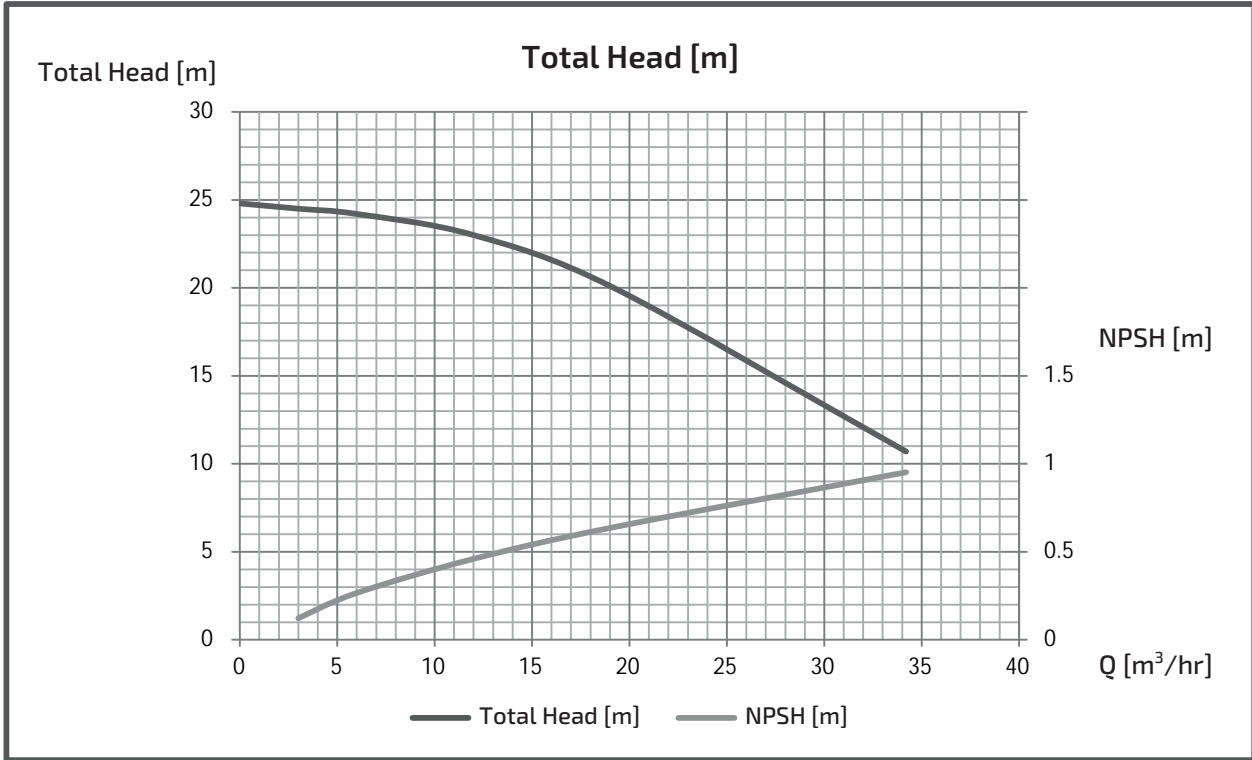

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES655M4ME1.5




■ PERFORMANCE CURVES

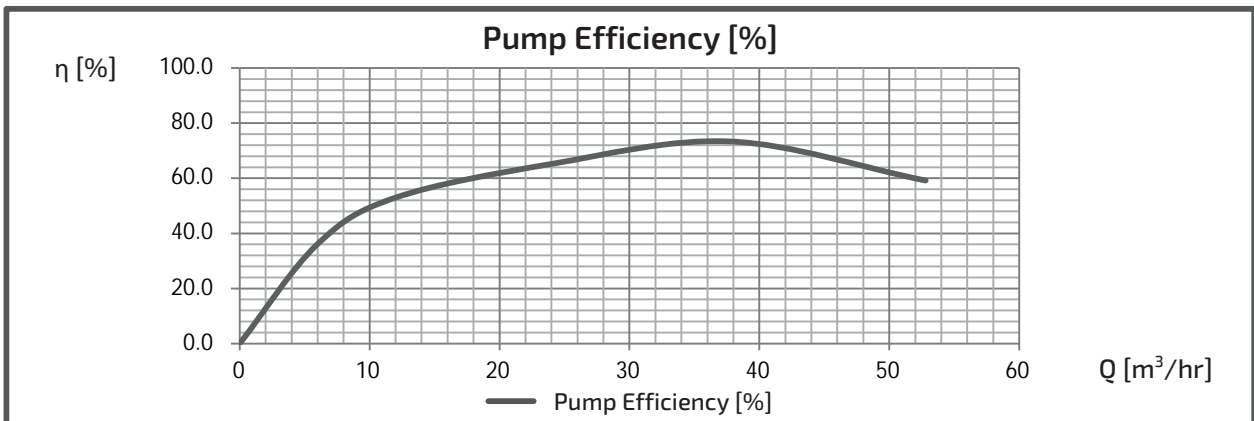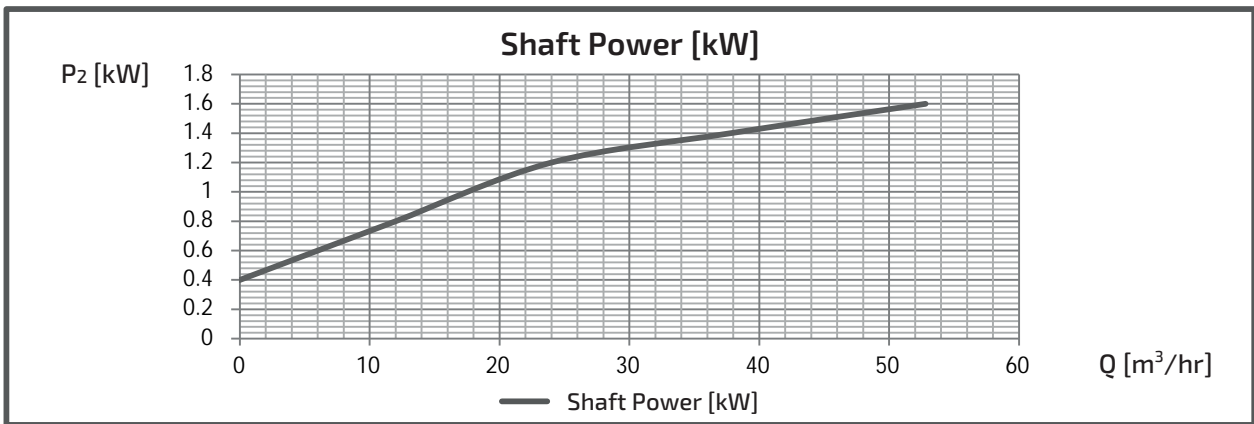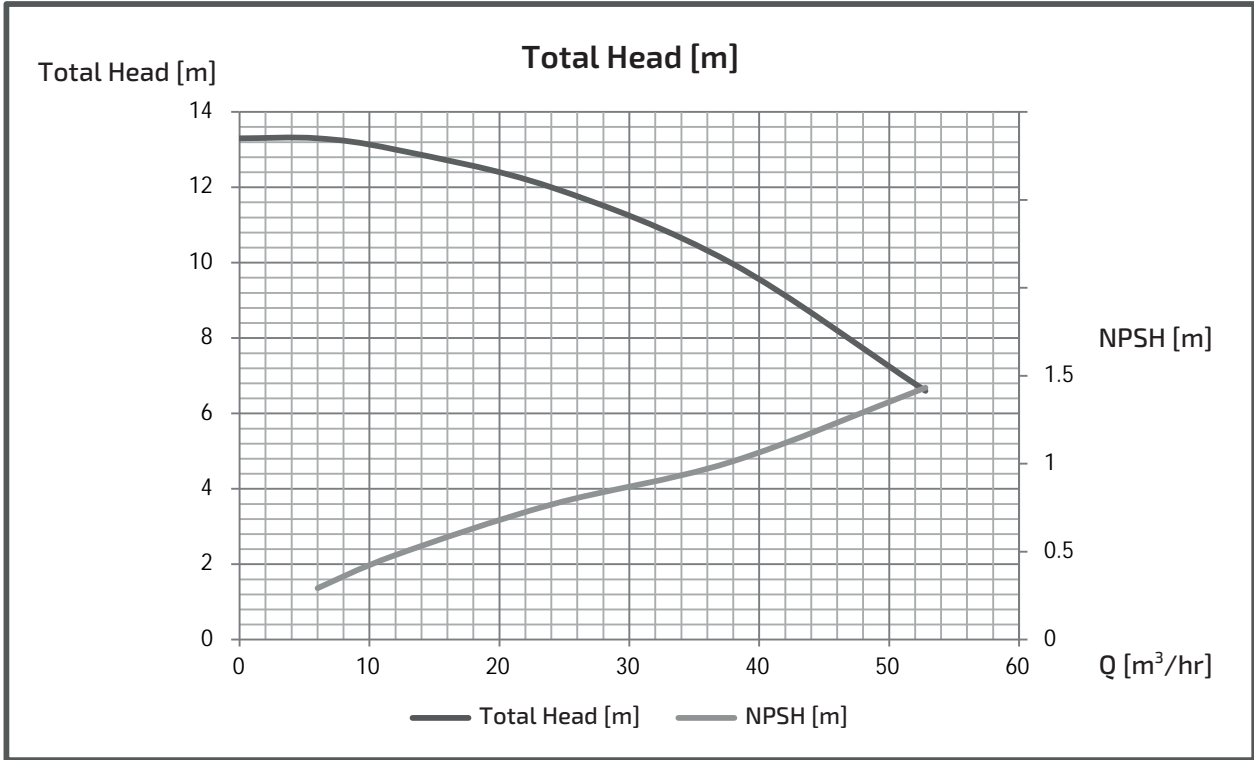

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES655M4ME2.2




■ PERFORMANCE CURVES

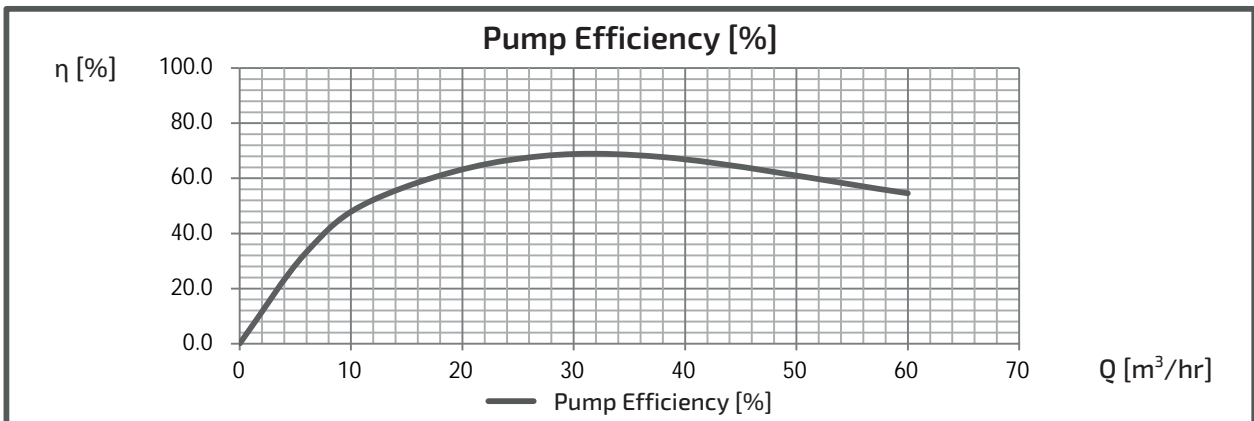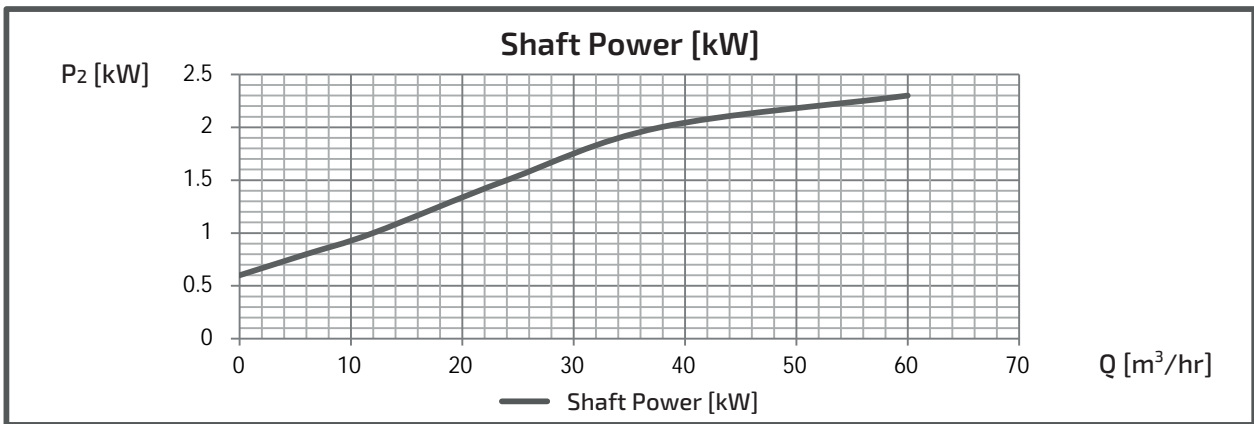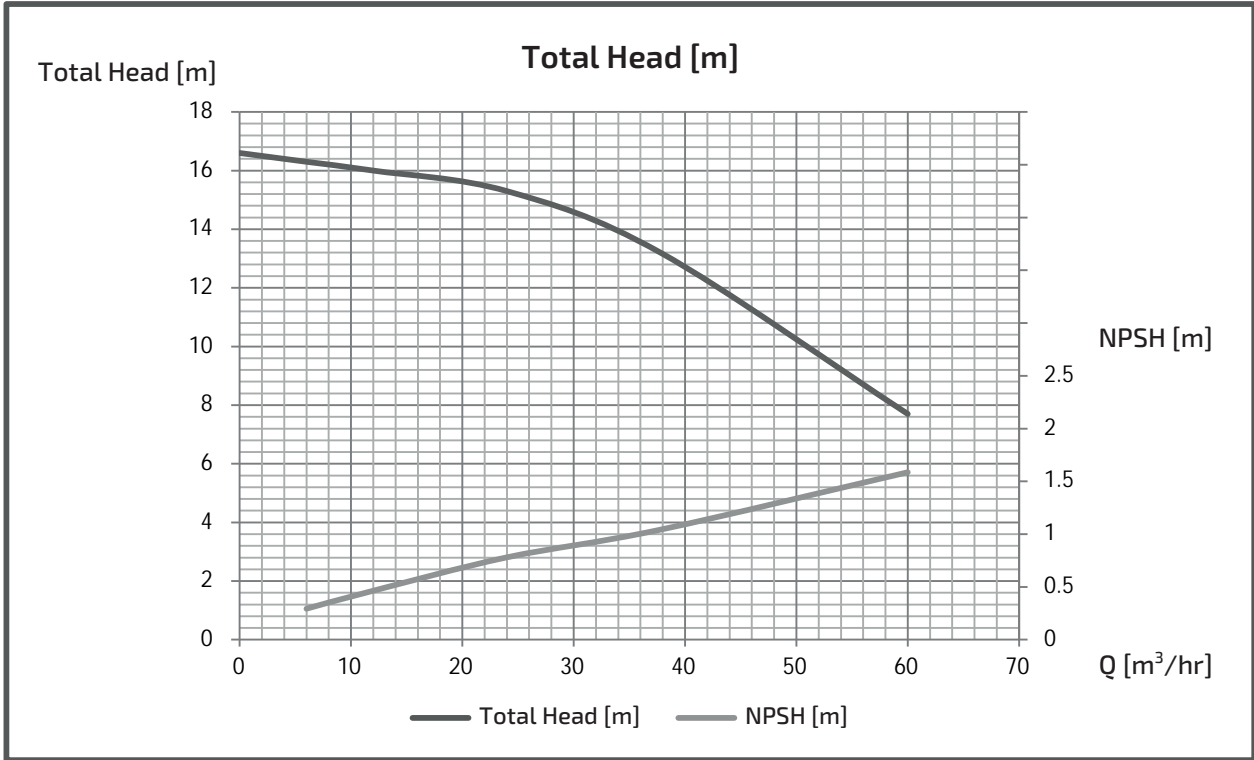

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES655M4ME3.7




■ PERFORMANCE CURVES

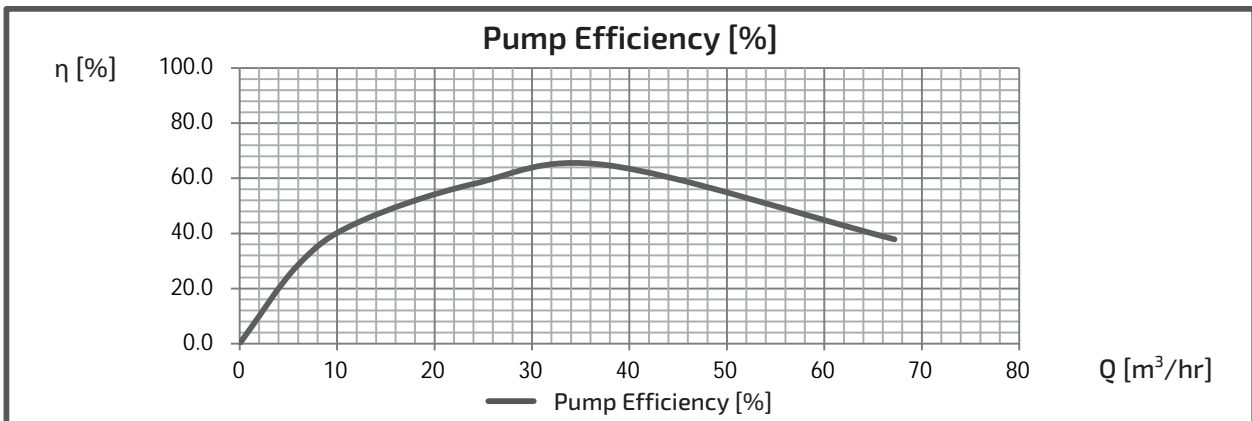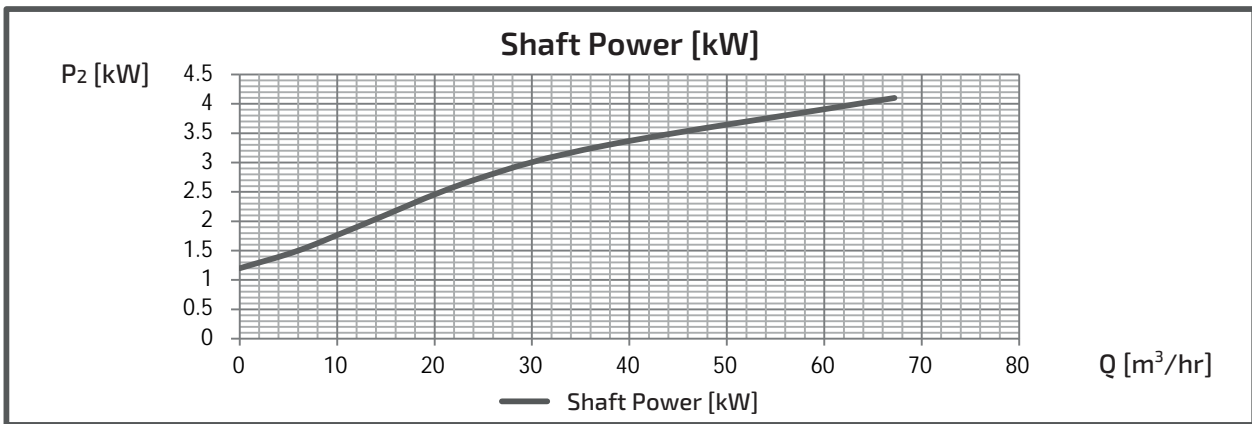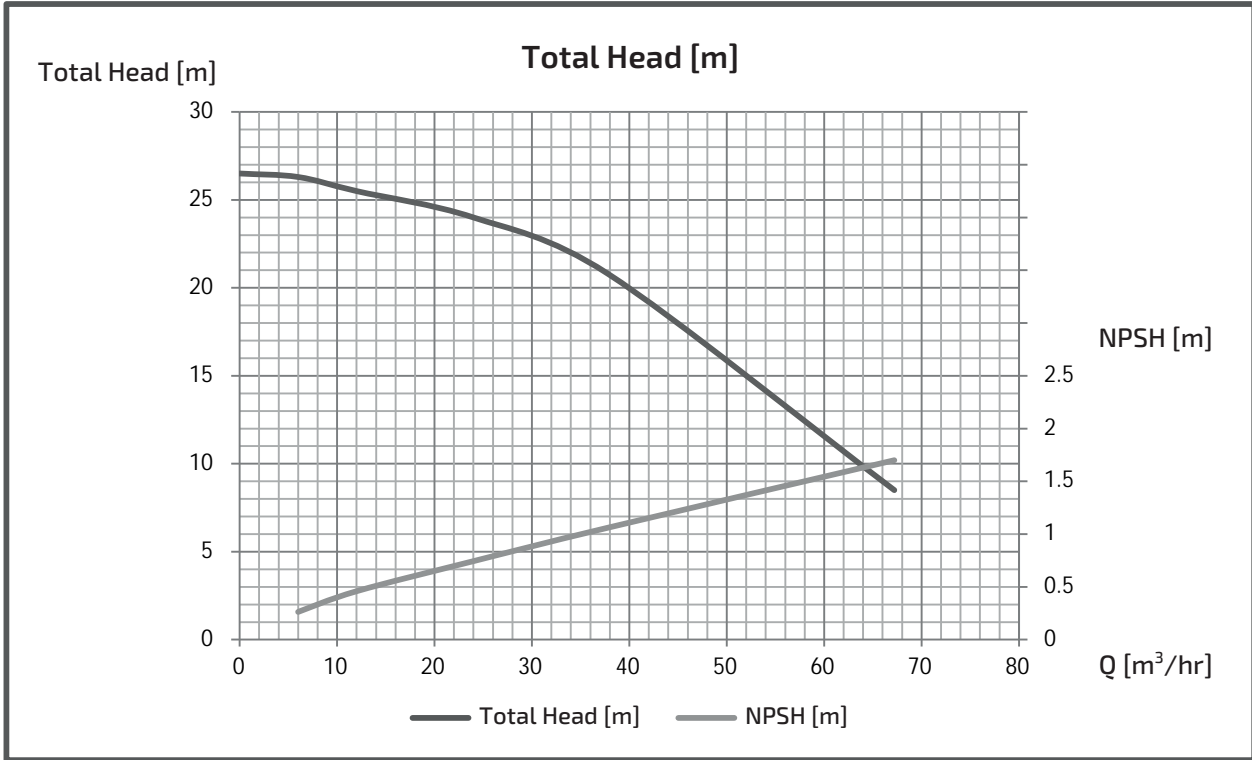

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES805M4ME2.2




■ PERFORMANCE CURVES

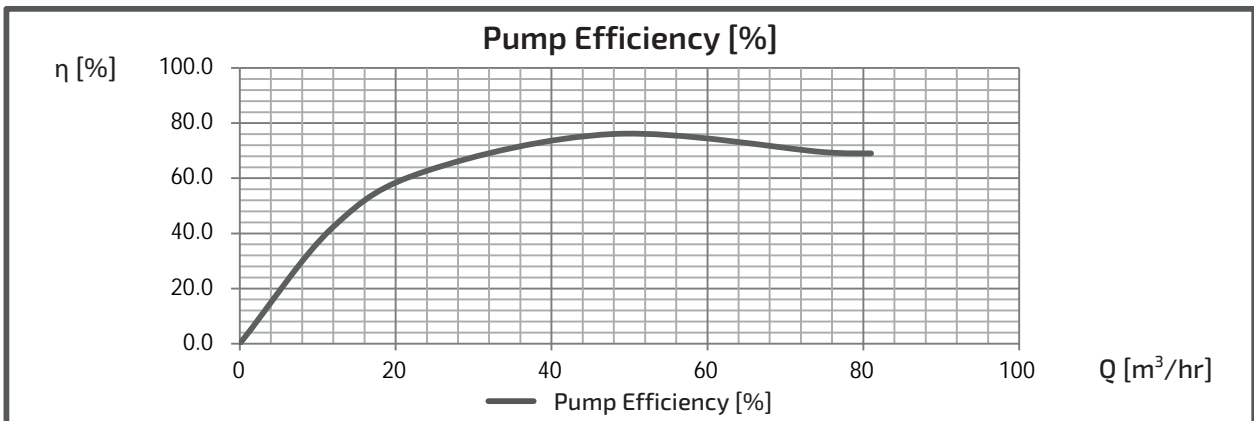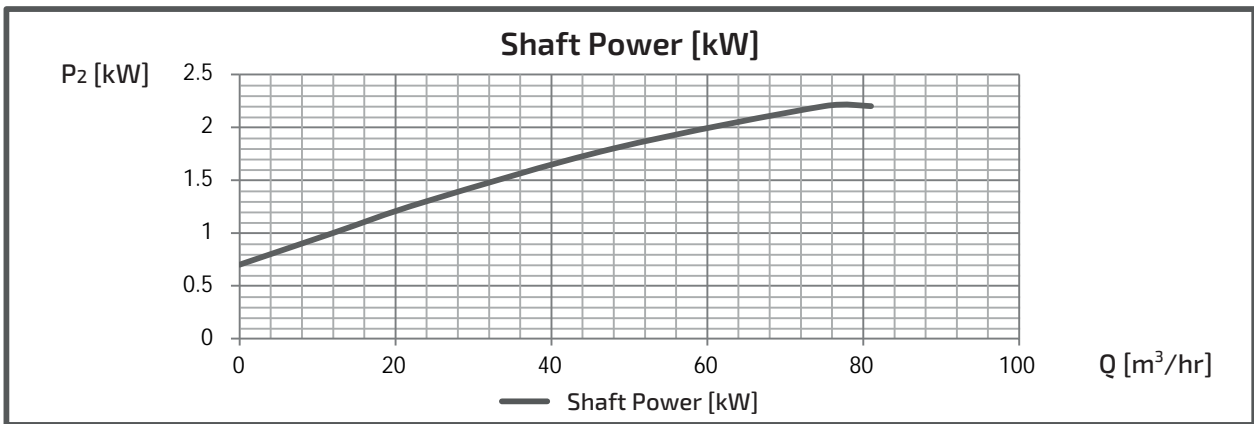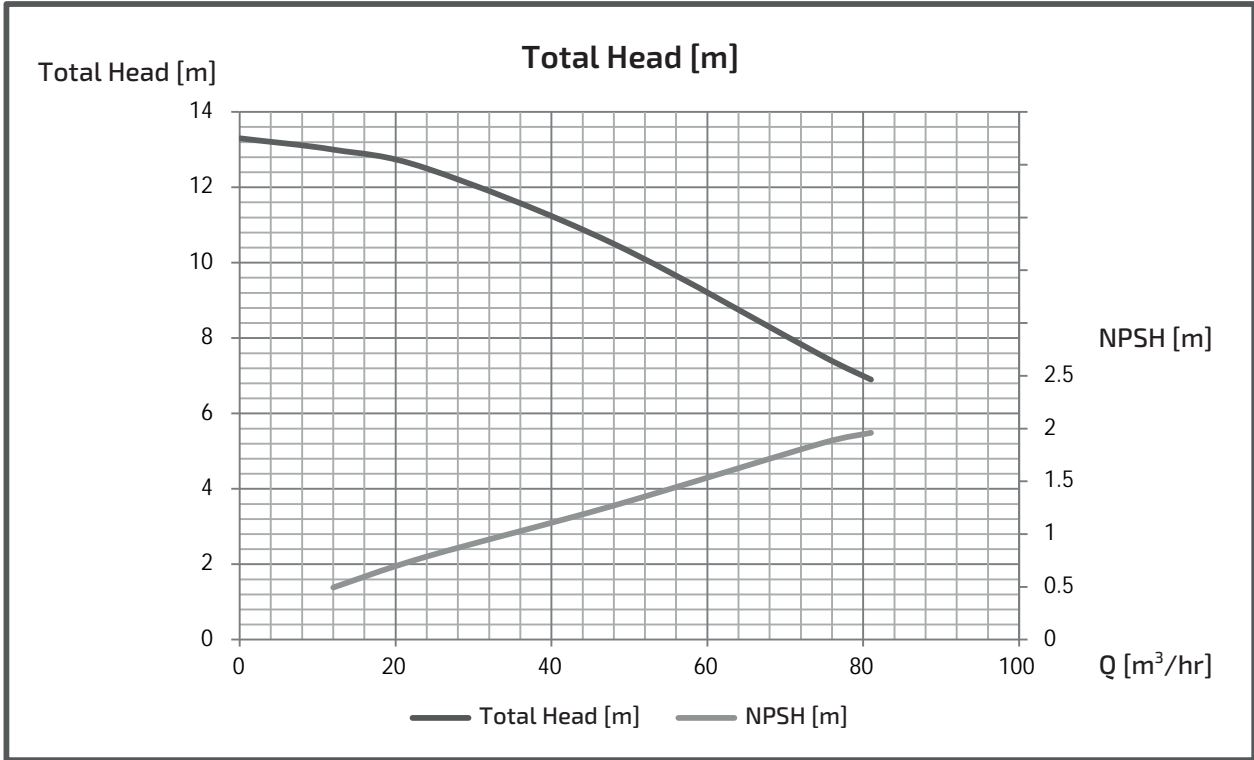

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES805M4ME3.7




■ PERFORMANCE CURVES

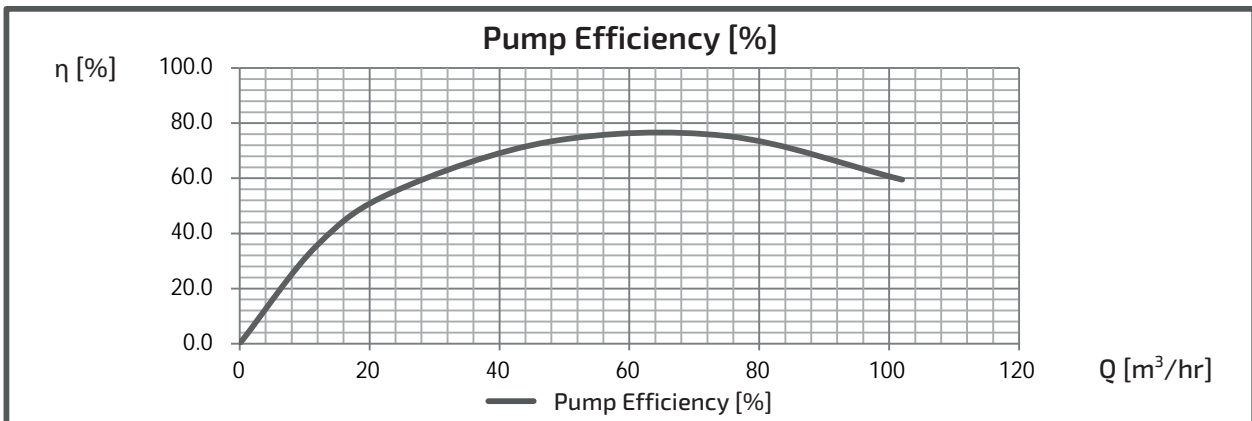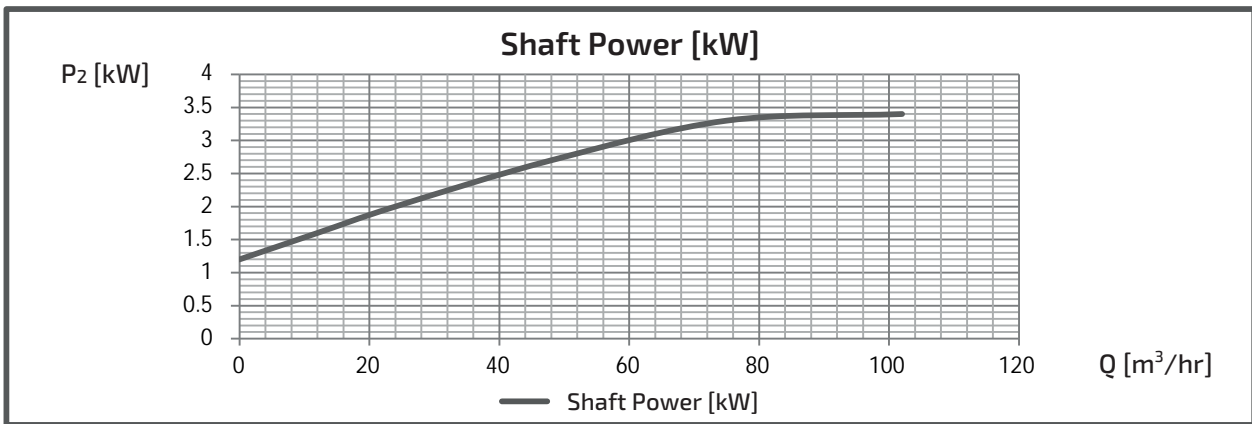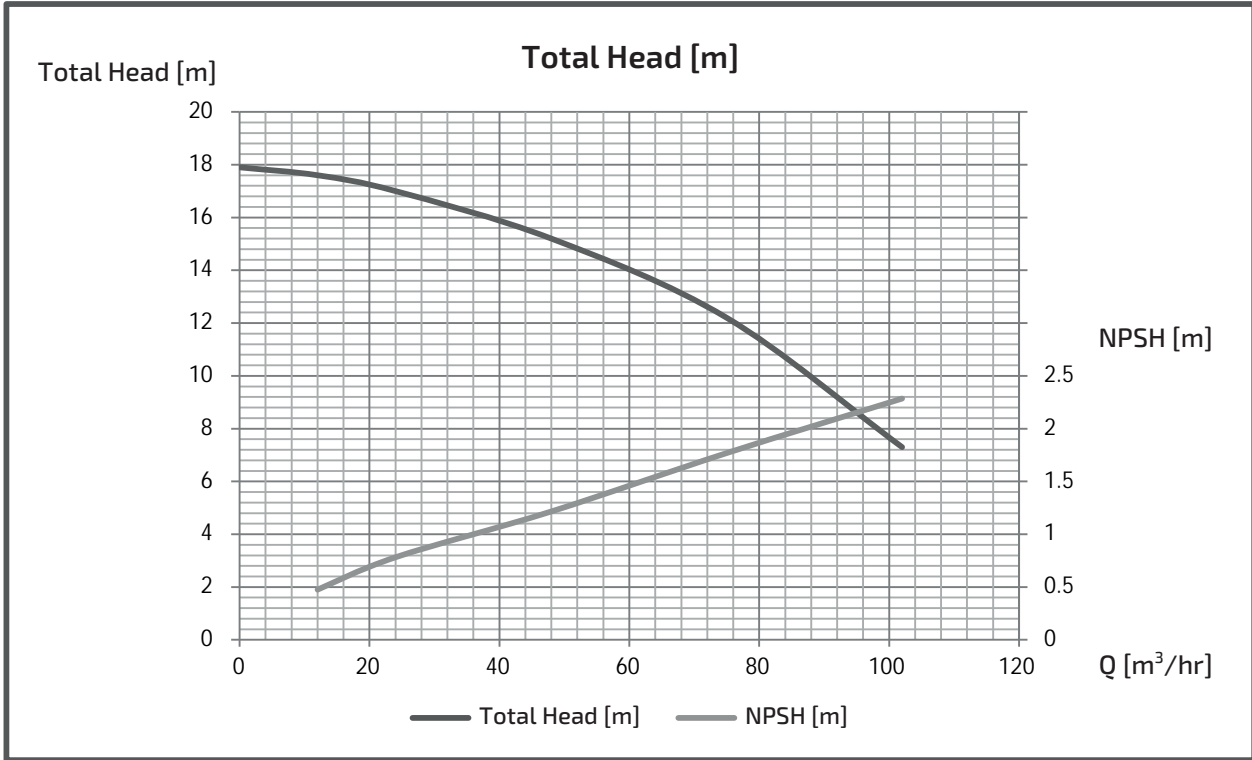

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES805M4ME5.5




■ PERFORMANCE CURVES

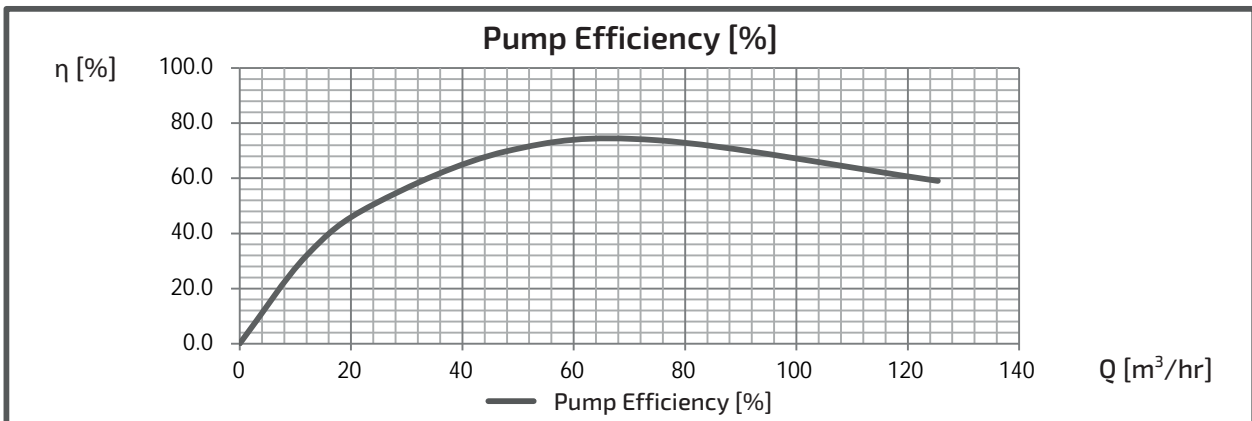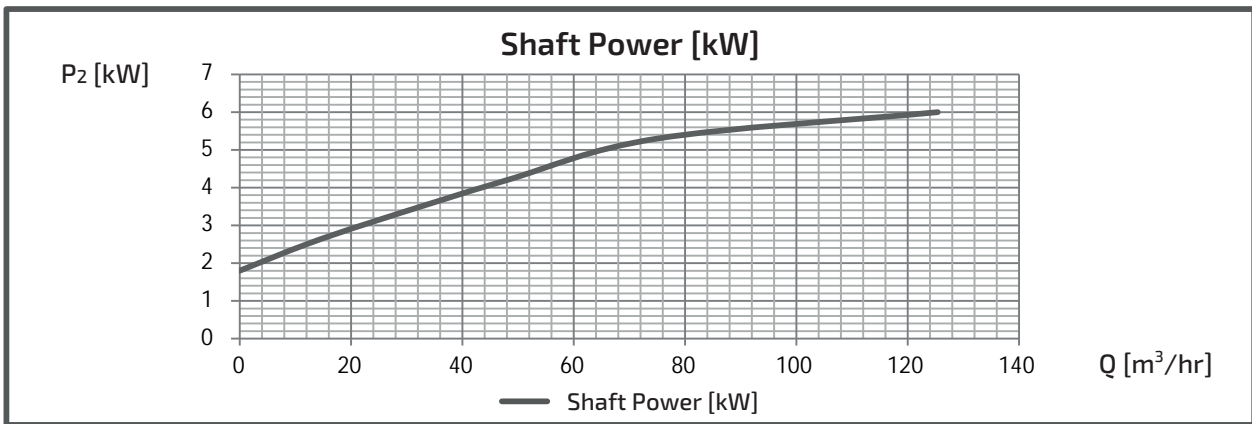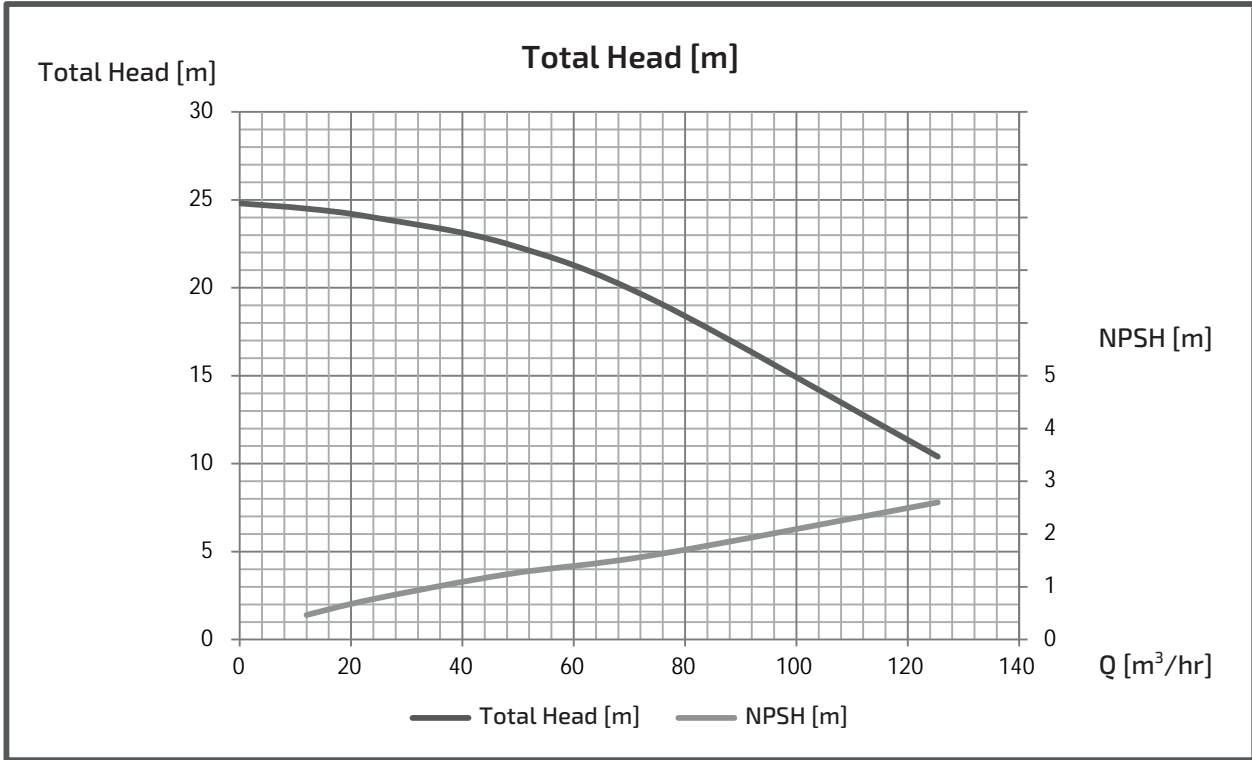

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES805M4ME7.5




■ PERFORMANCE CURVES

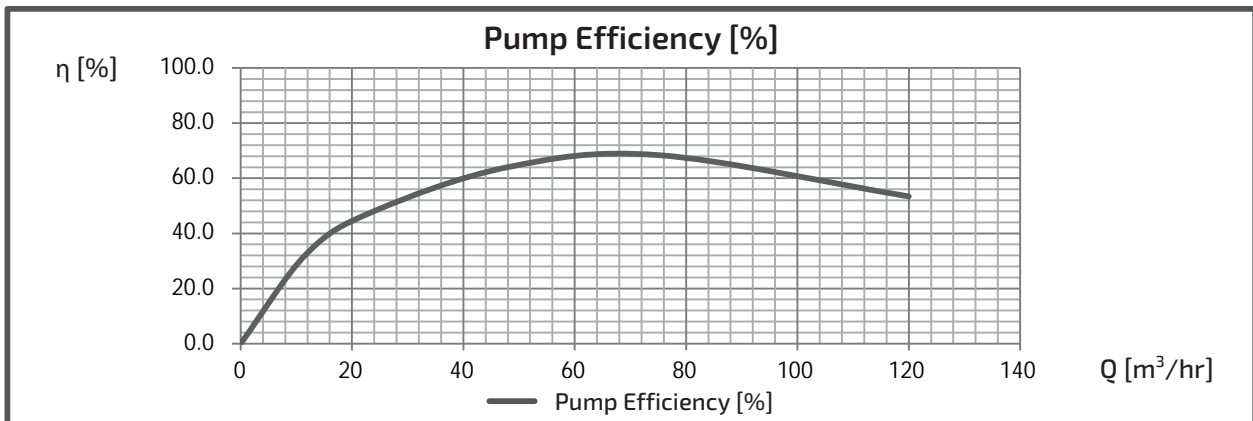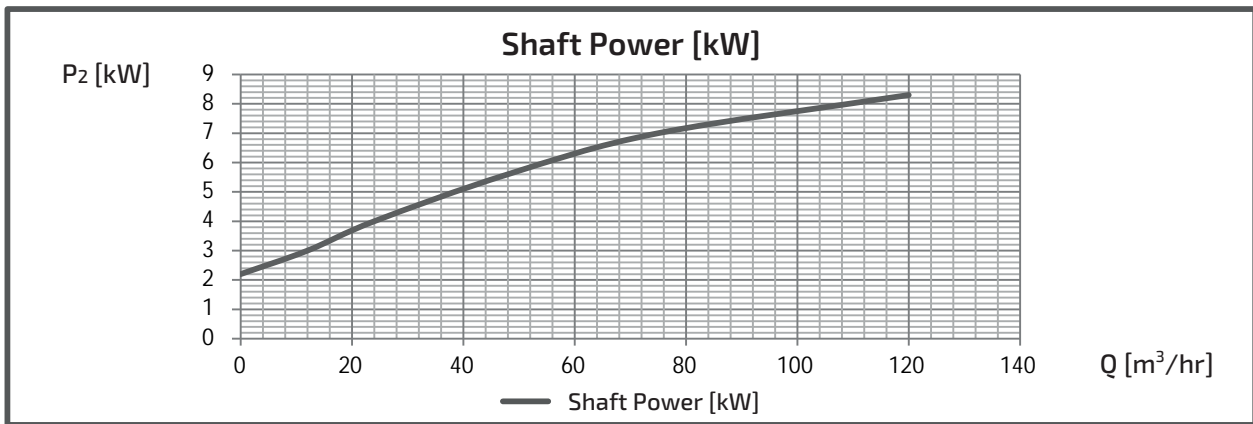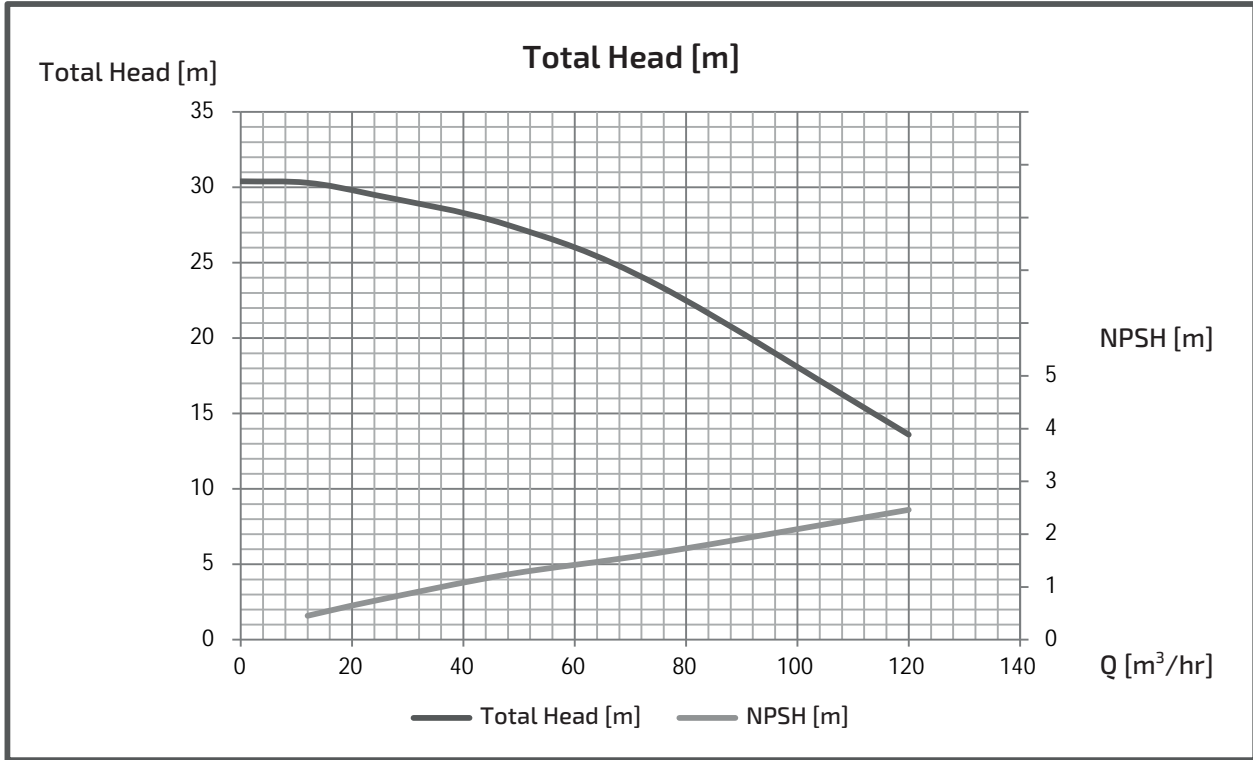

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES1005M4ME3.7




■ PERFORMANCE CURVES

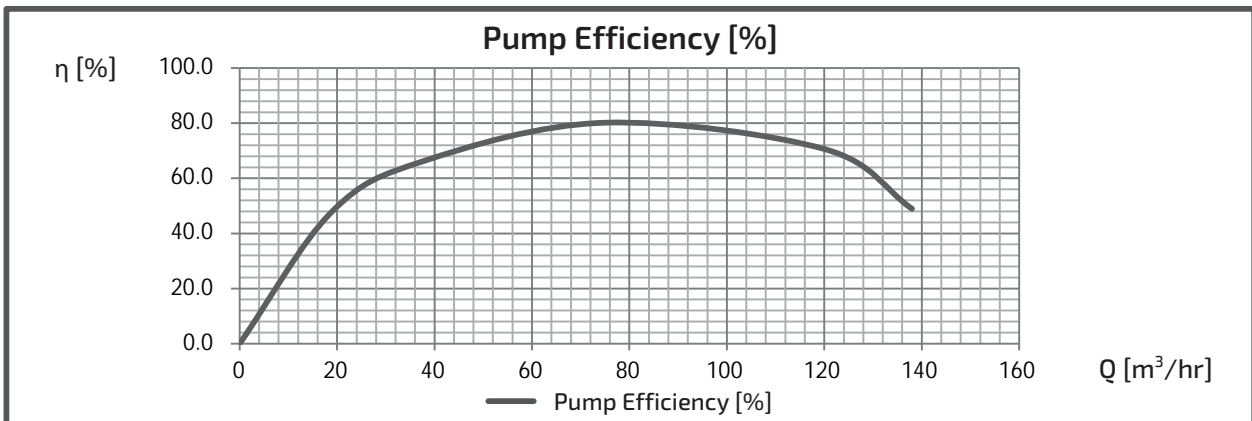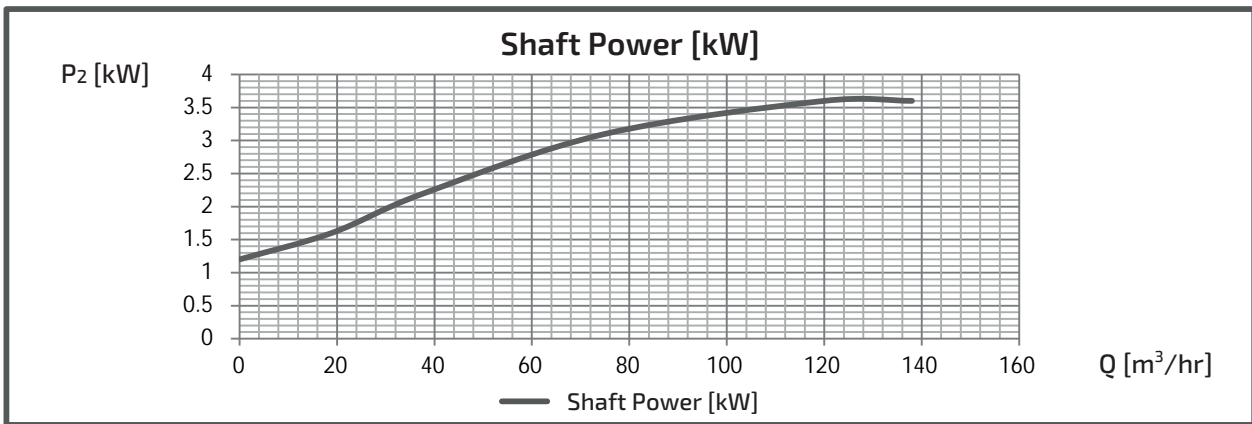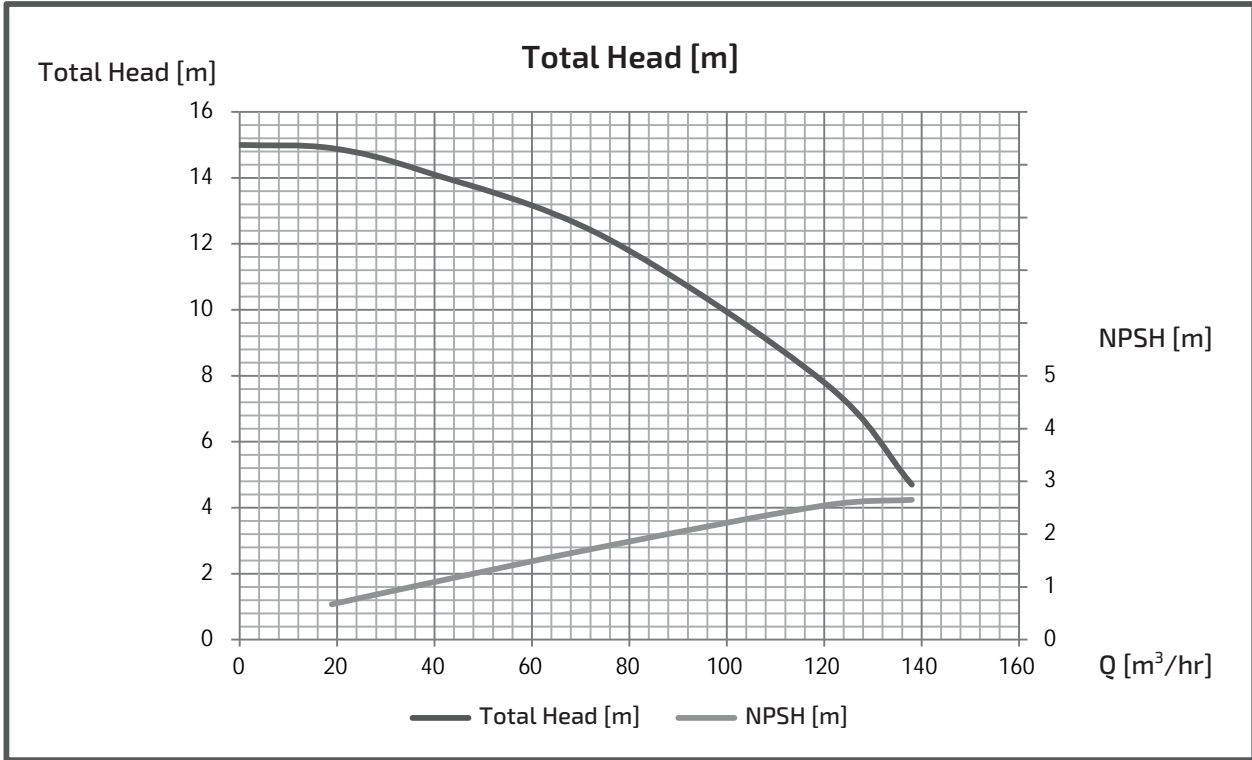

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES1005M4ME5.5




■ PERFORMANCE CURVES

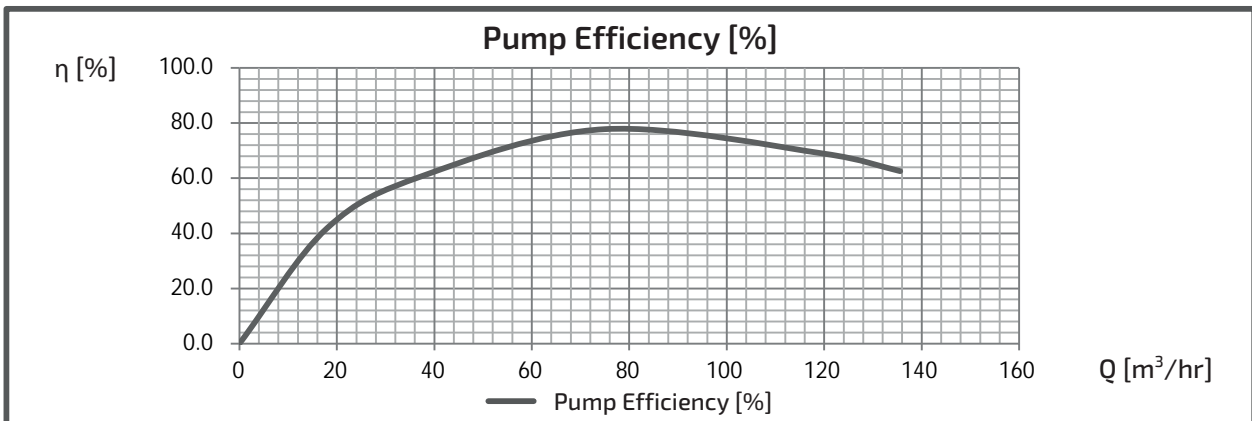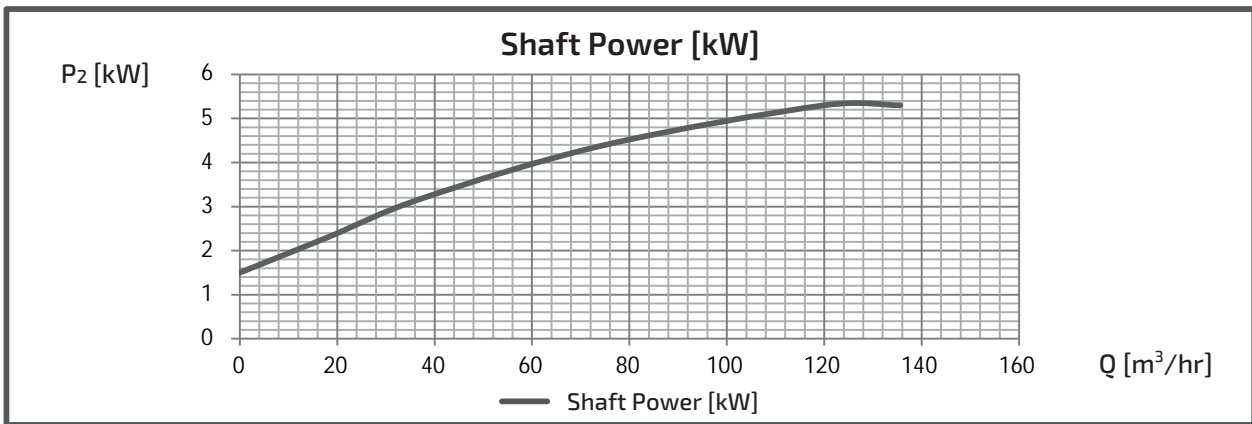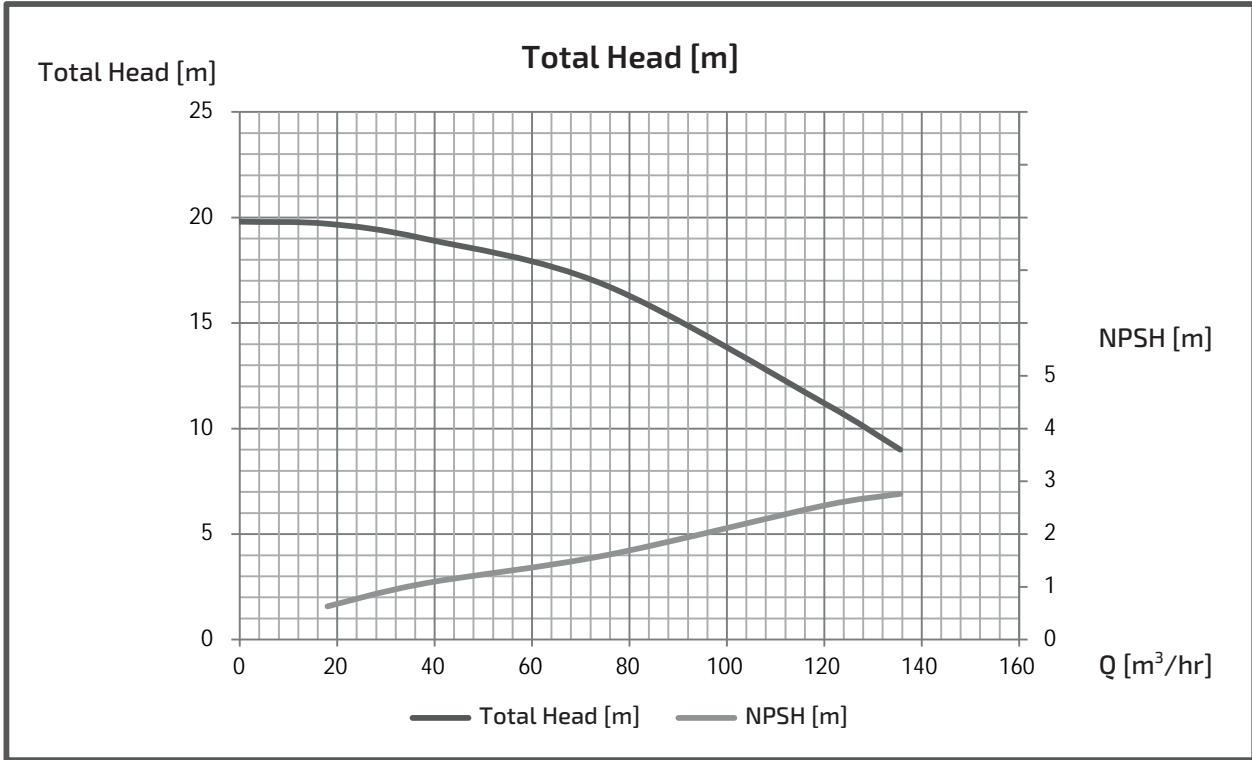

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES1005M4ME7.5




■ PERFORMANCE CURVES

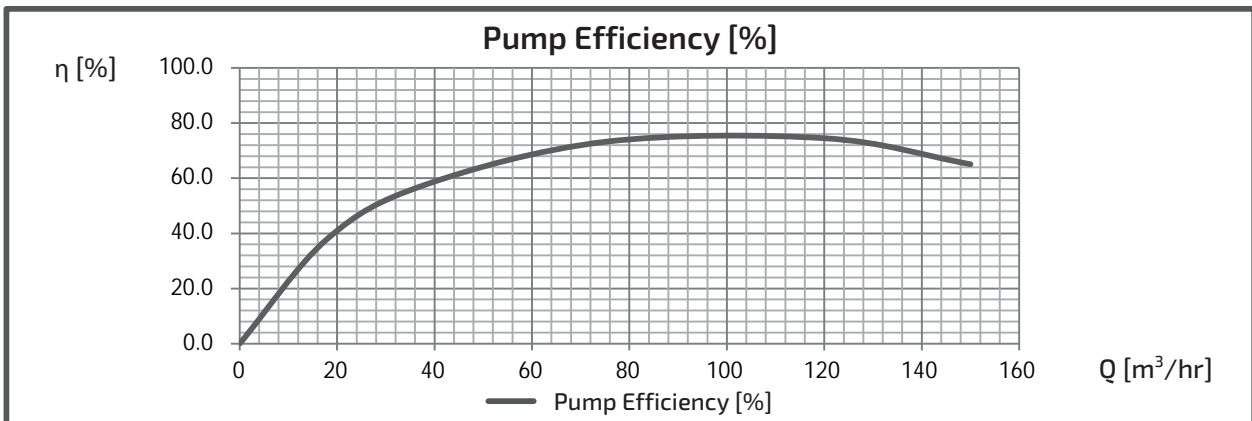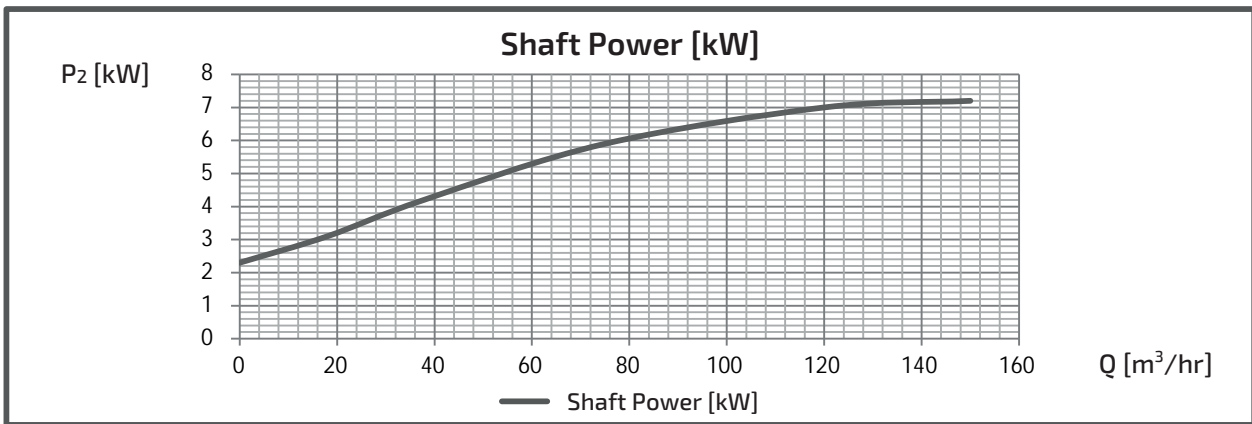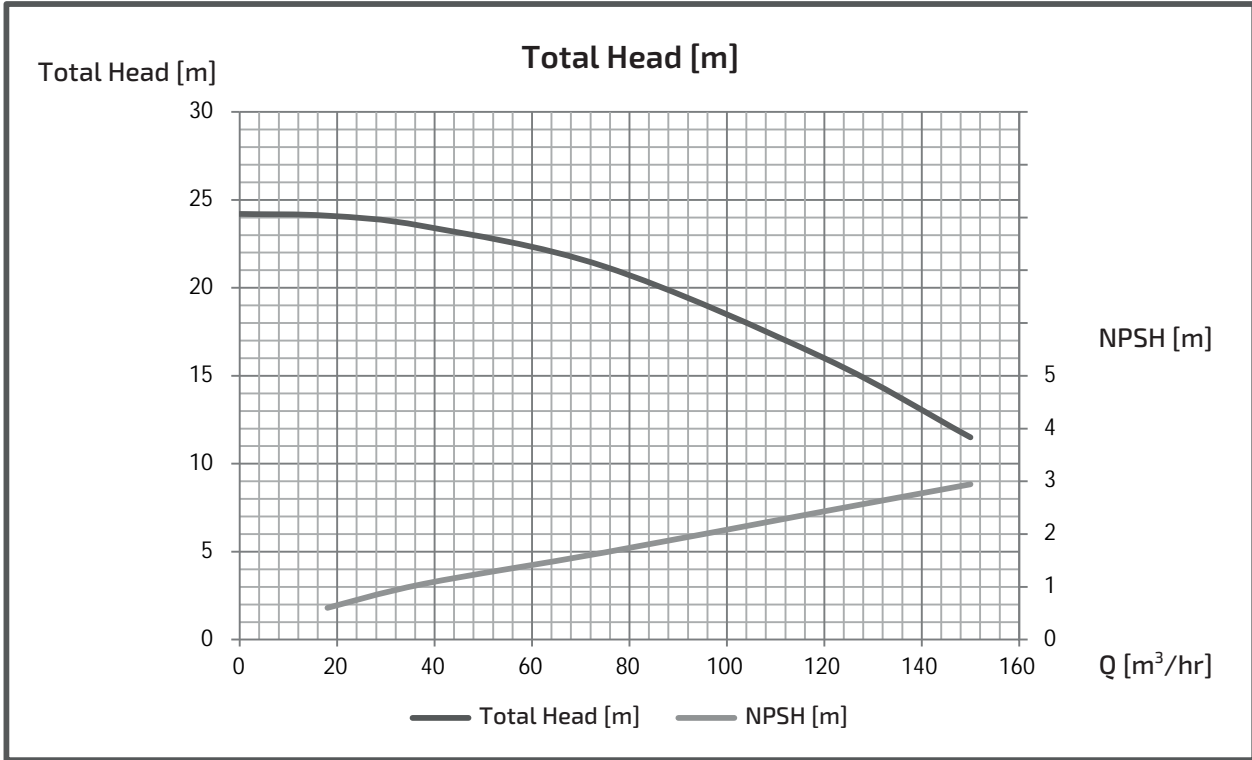

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES1005M4ME11




■ PERFORMANCE CURVES

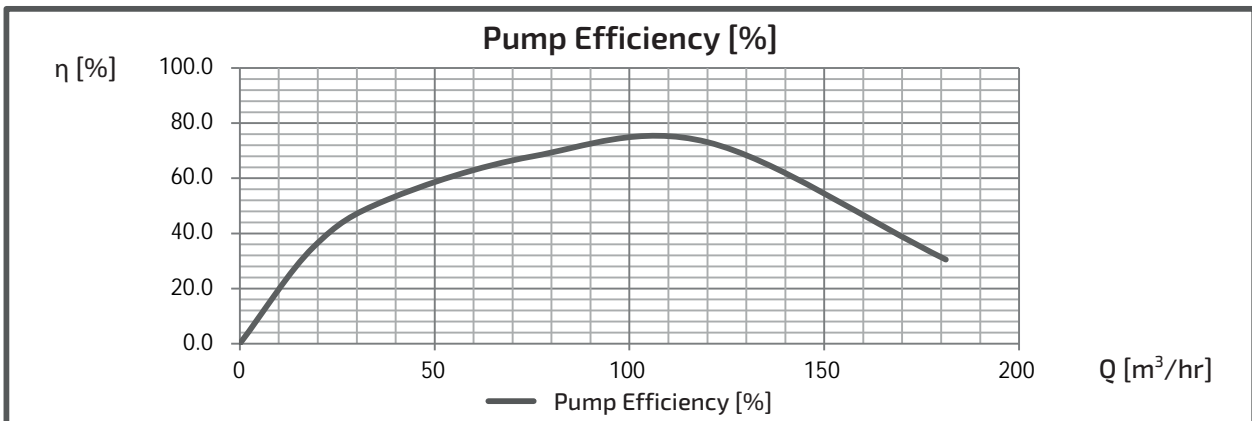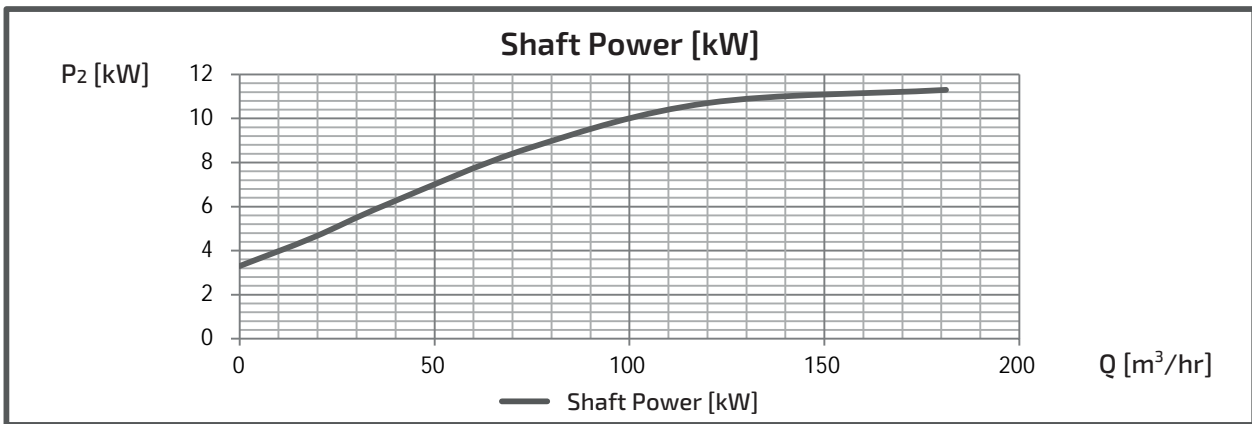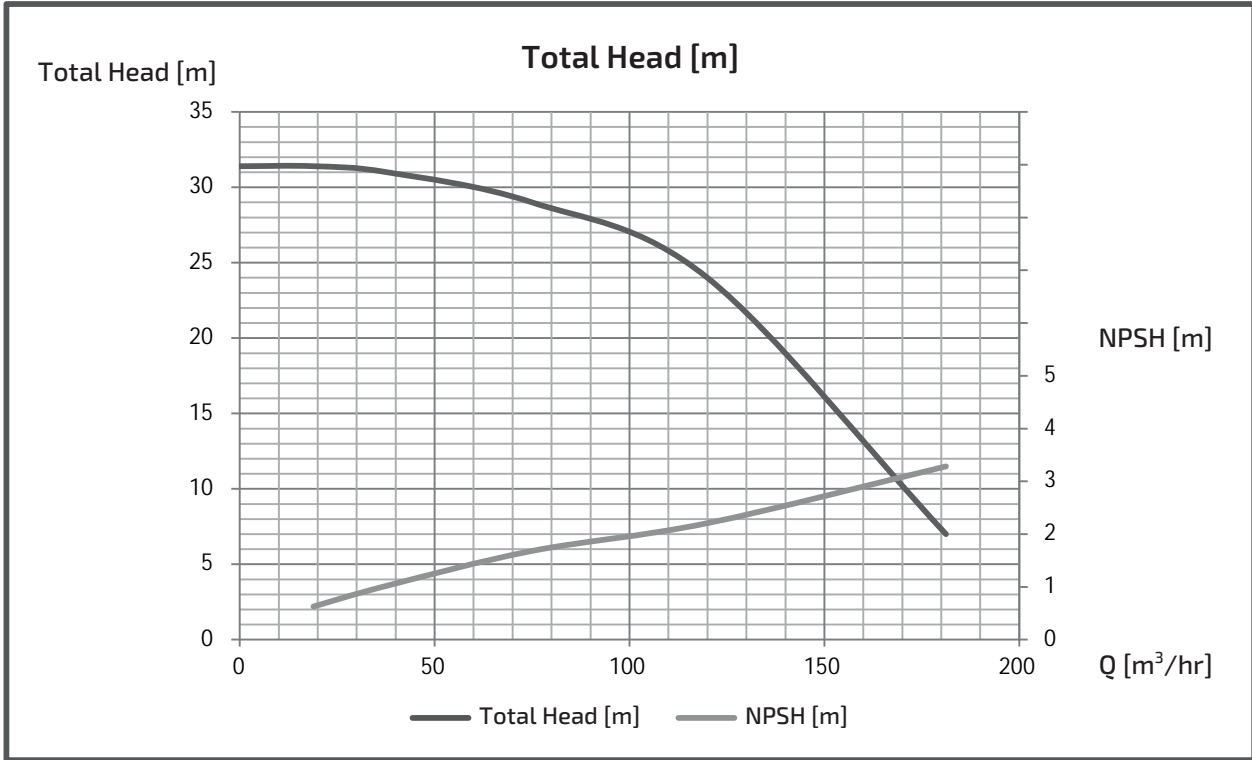

EXPECTED PERFORMANCE CURVE (GES-4M)

MODEL : GES1005M4ME15




■ PERFORMANCE CURVES

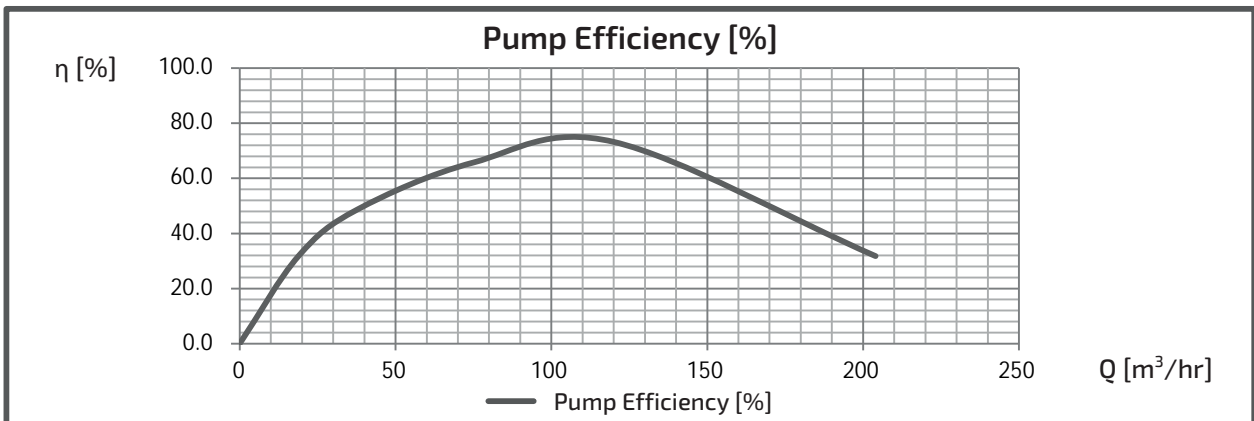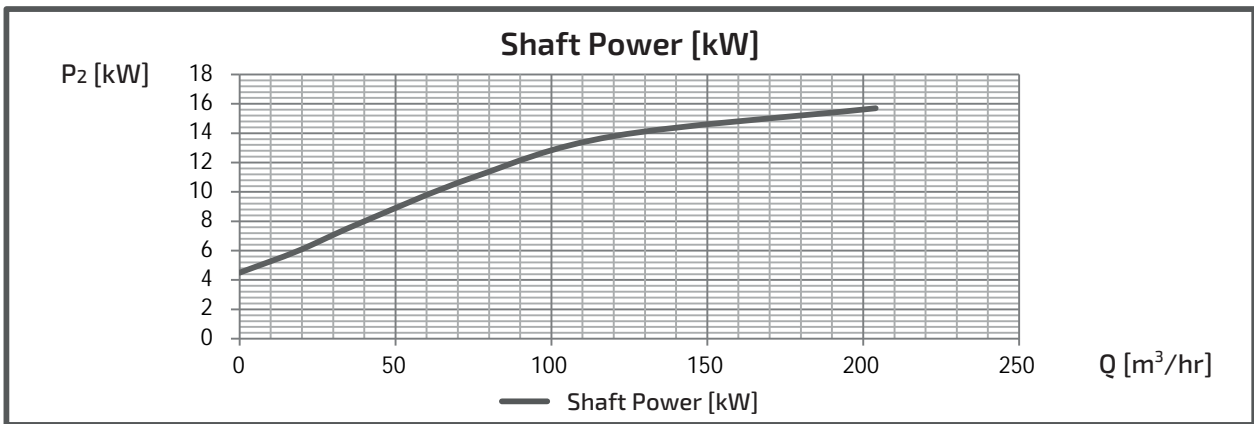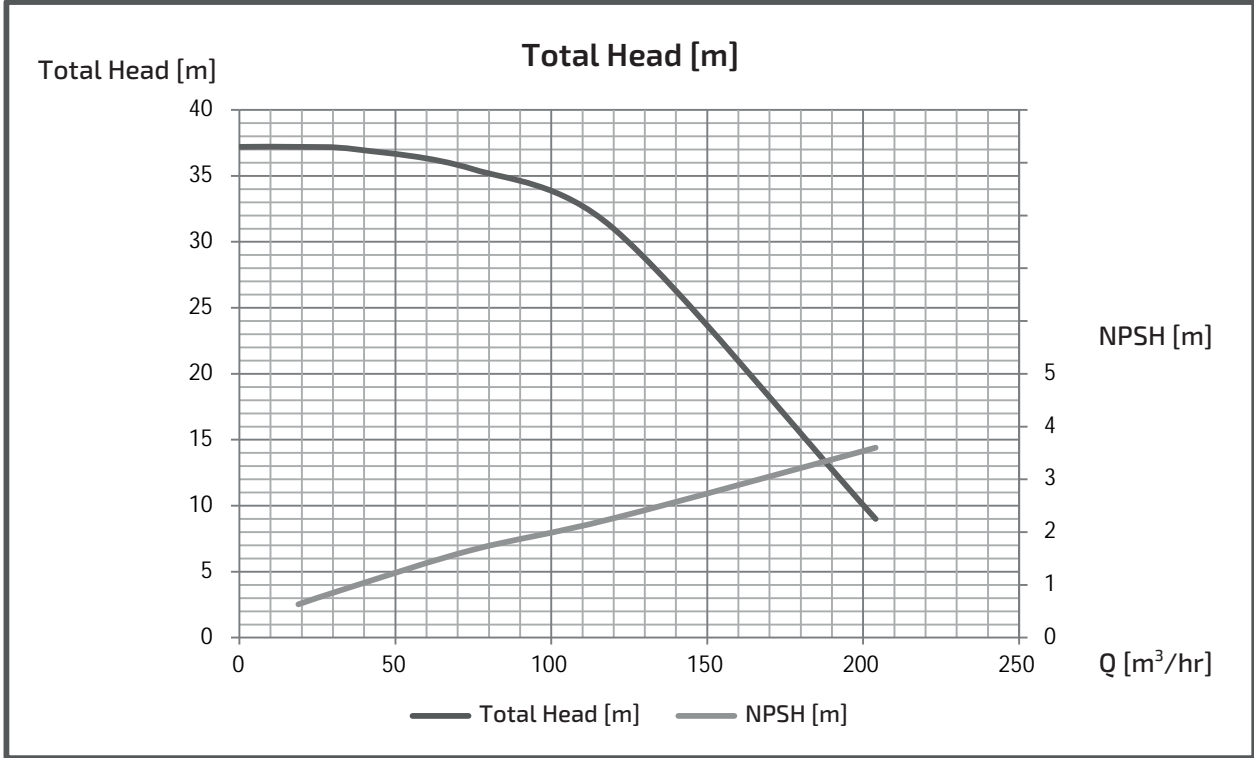

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES405CE0.75T4




■ PERFORMANCE CURVES

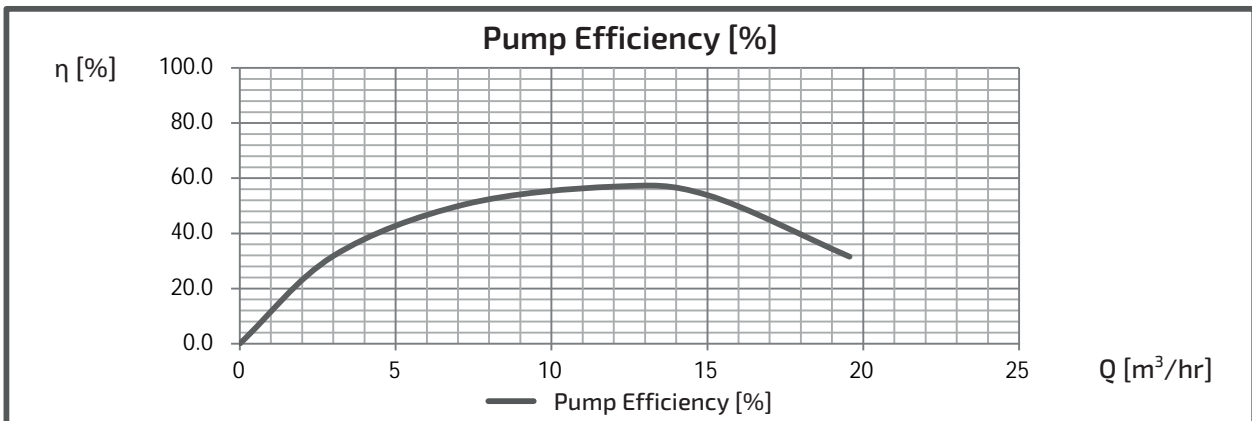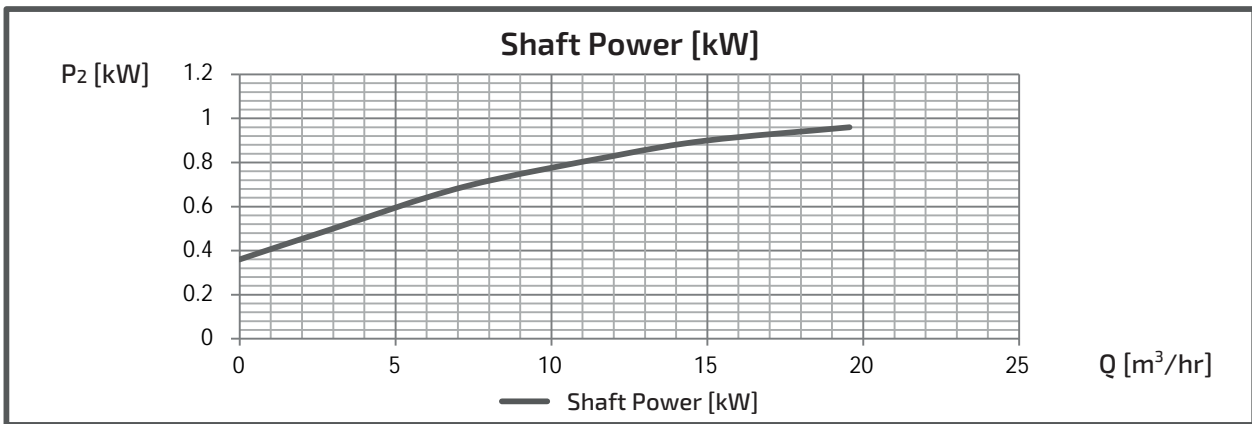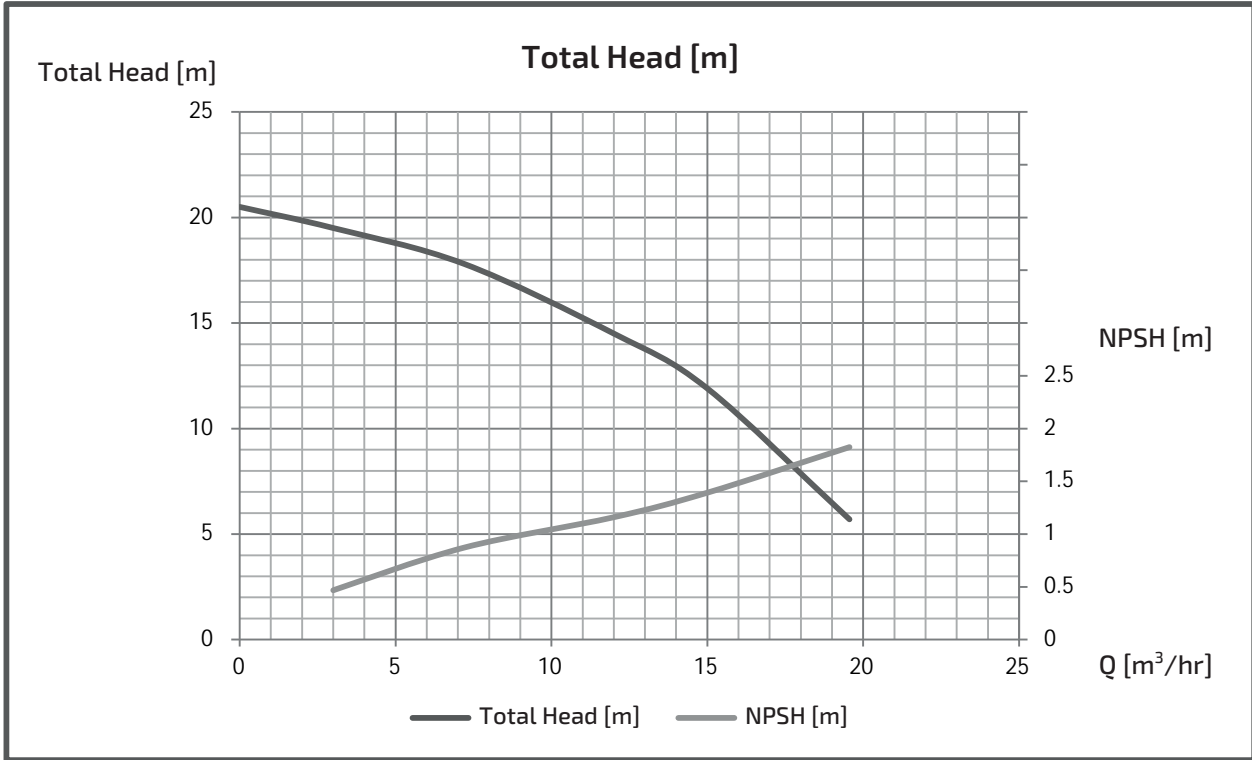

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES405CE1.5T4




■ PERFORMANCE CURVES

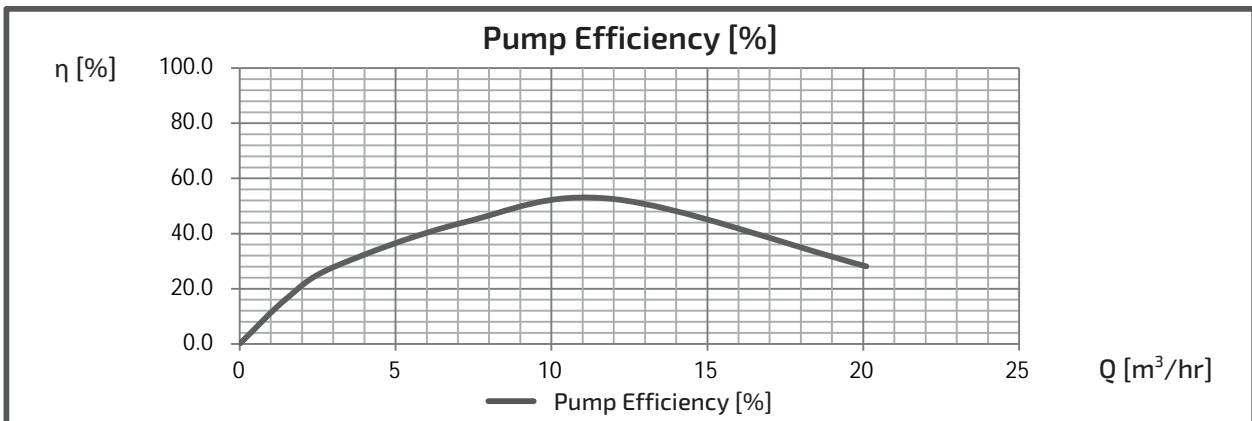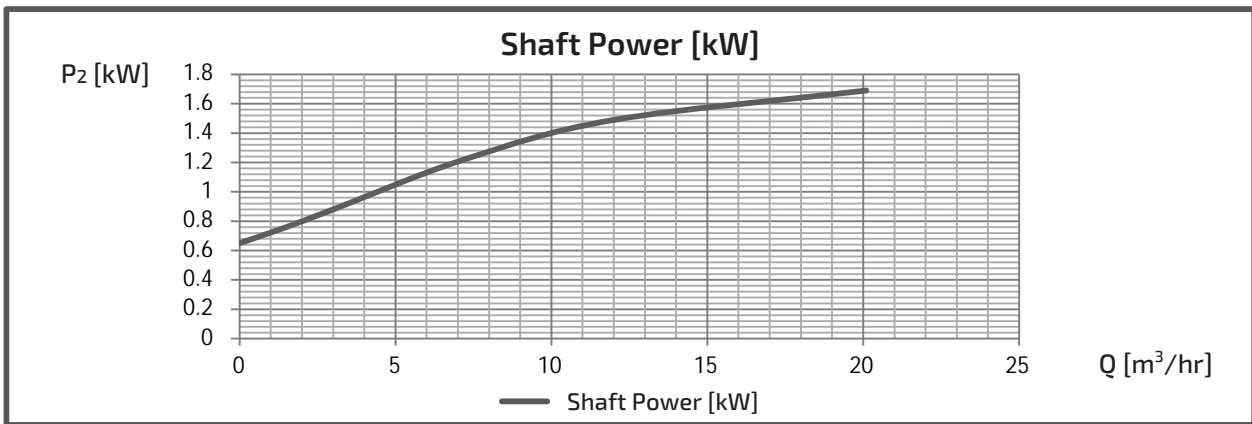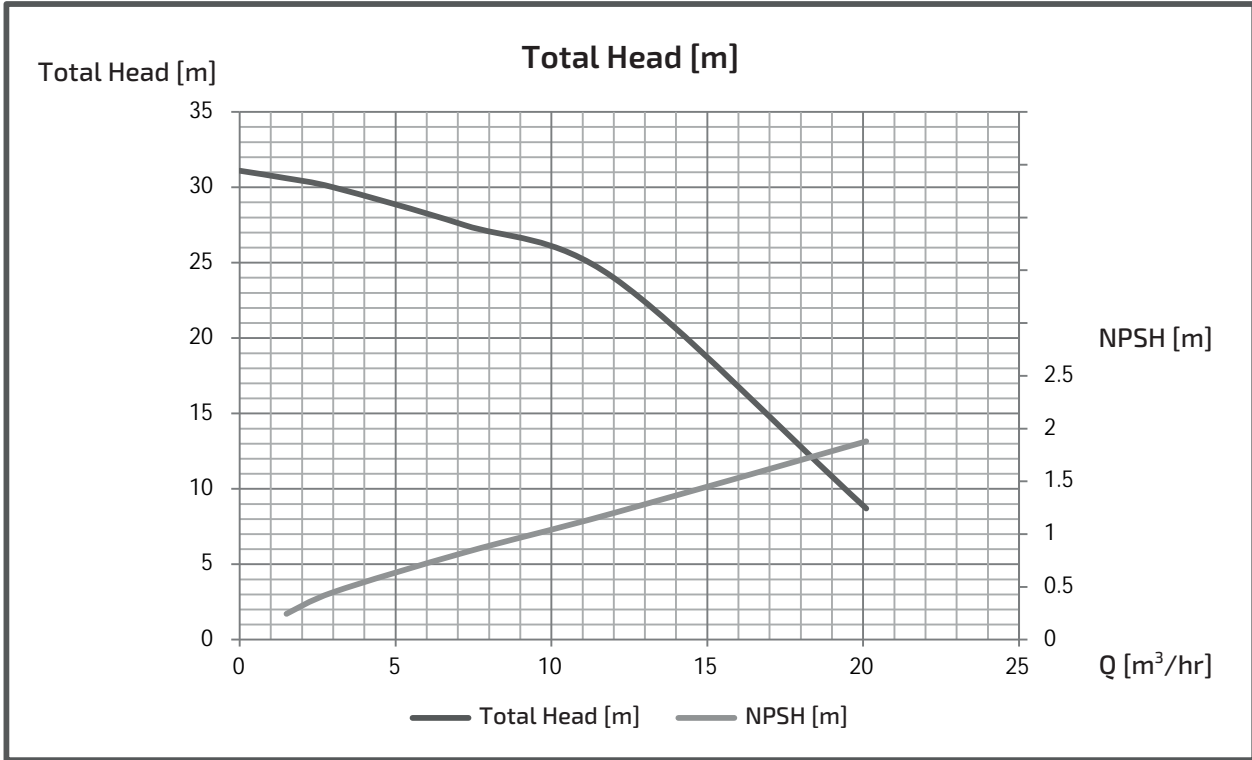

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES405CE2.2T4




■ PERFORMANCE CURVES

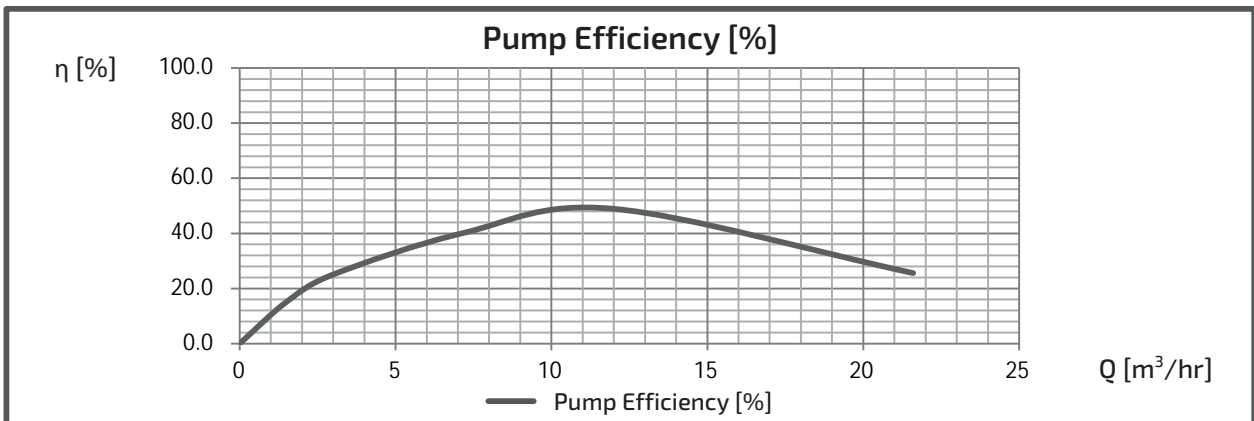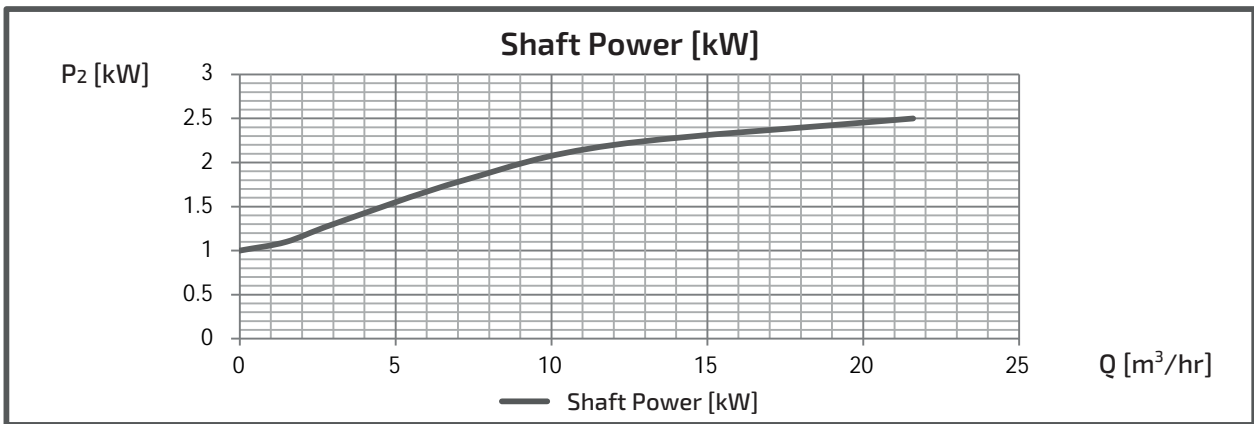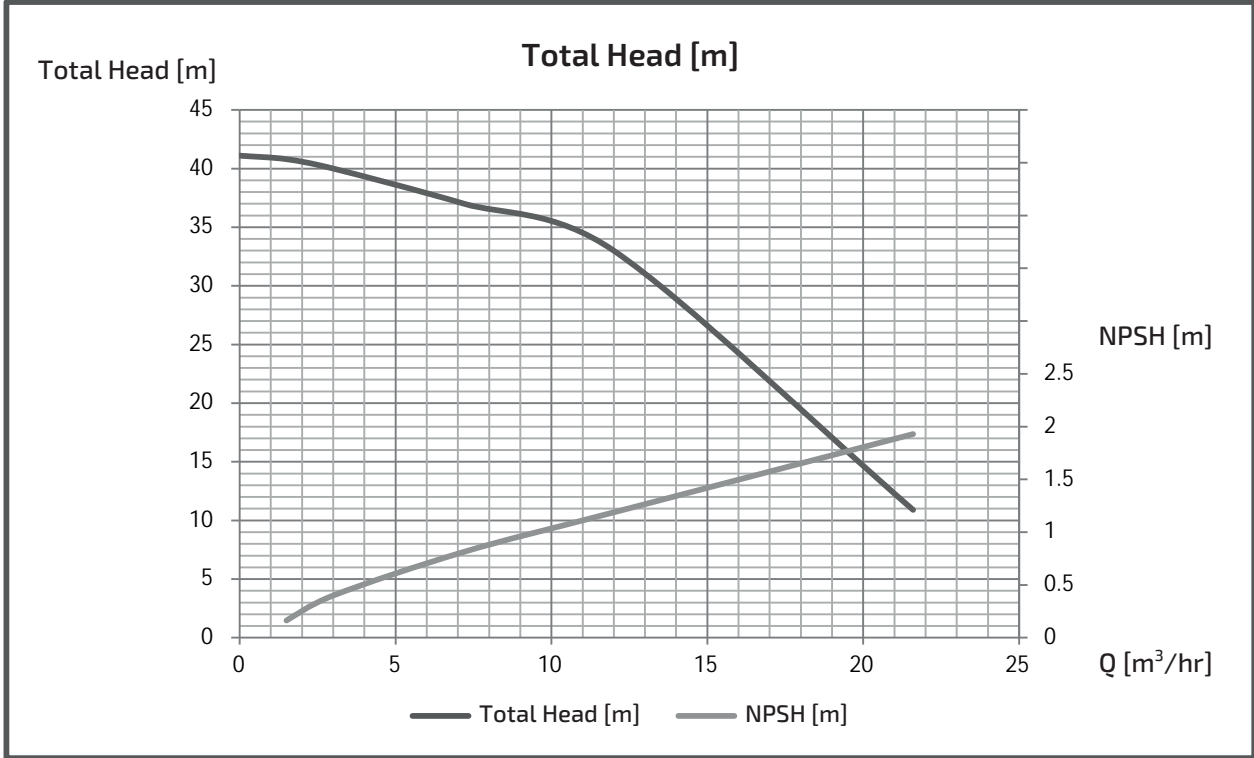

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES505CE1.5T4




■ PERFORMANCE CURVES

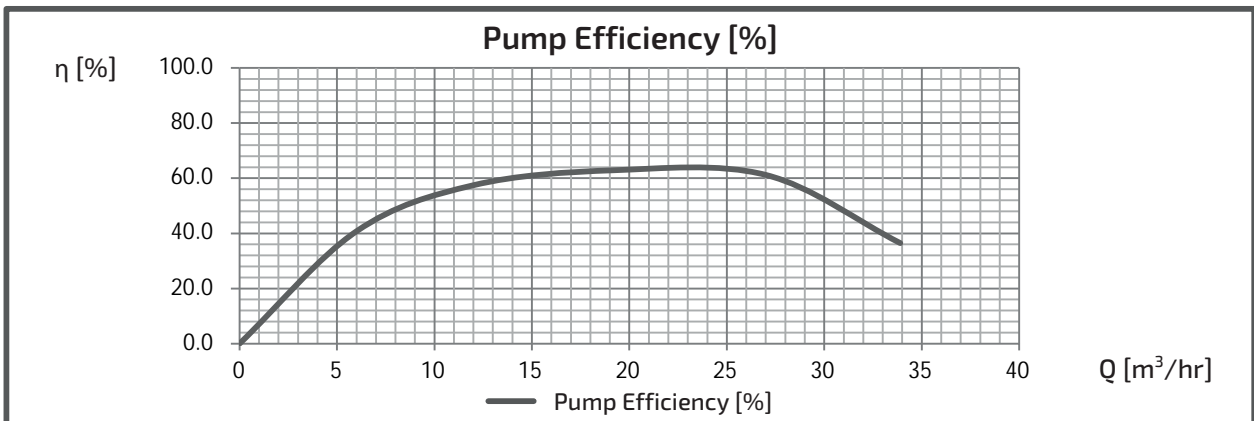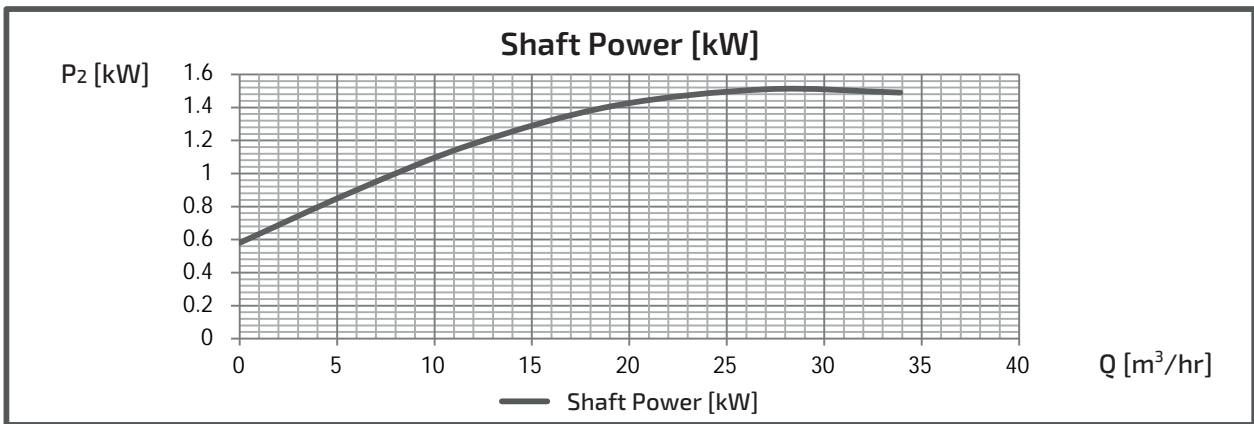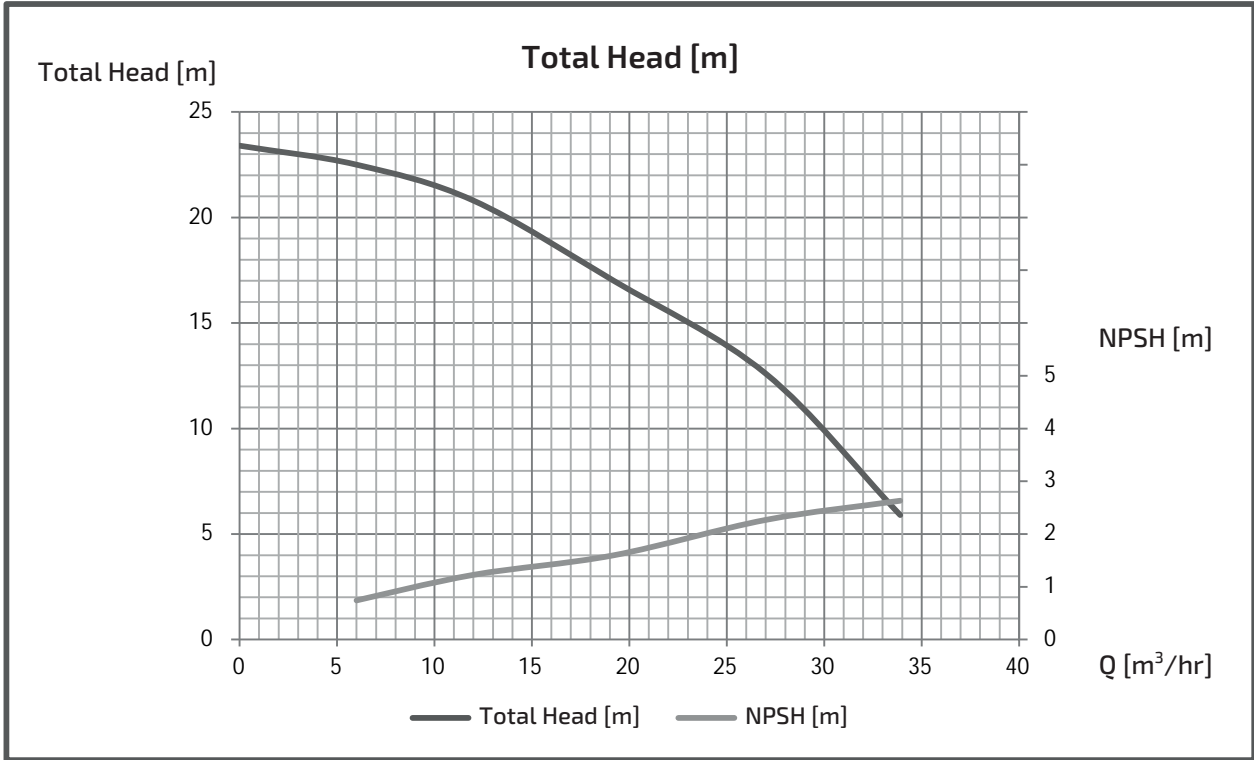

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES505CE2.2T4




■ PERFORMANCE CURVES

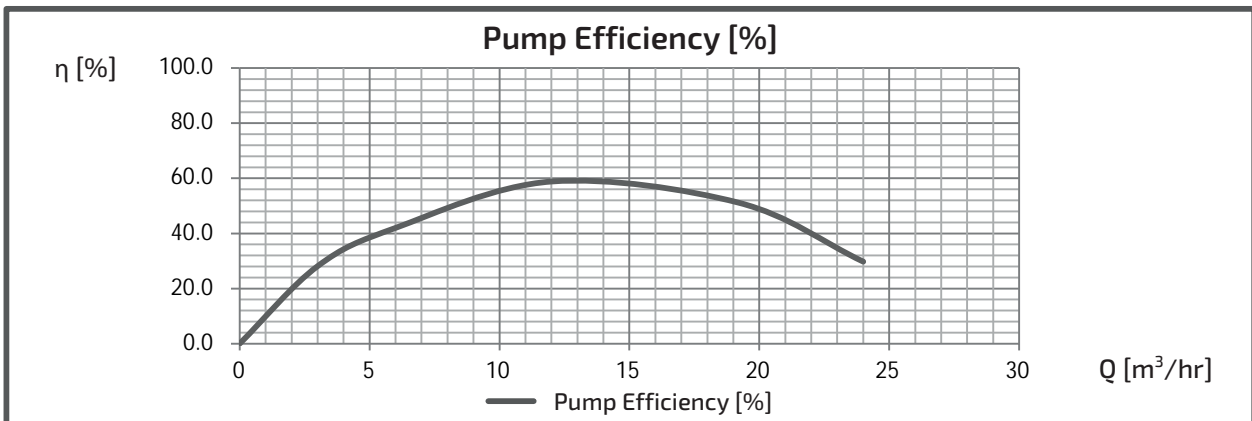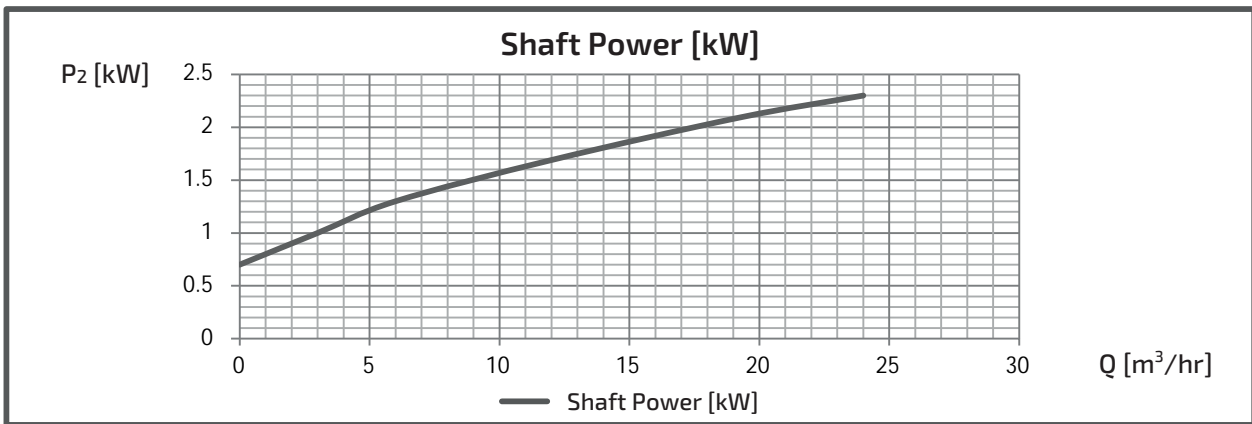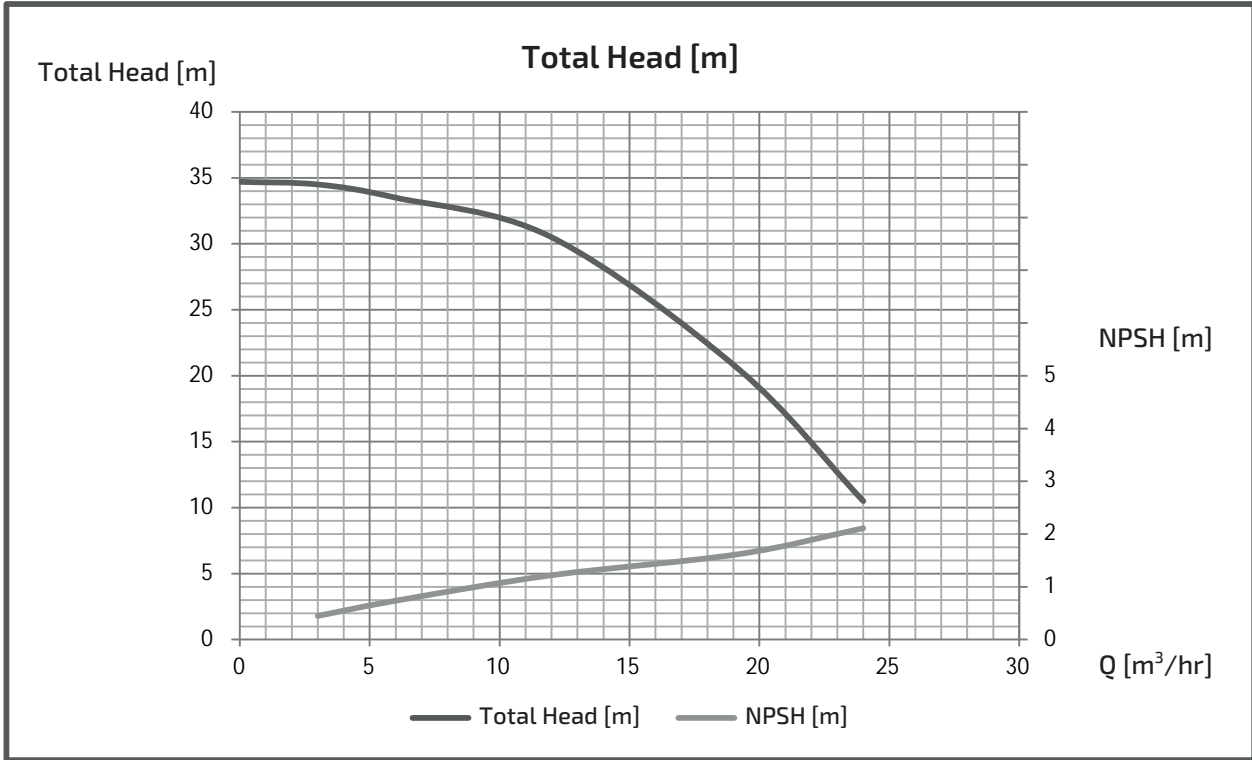

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES505CE3.7T4




■ PERFORMANCE CURVES

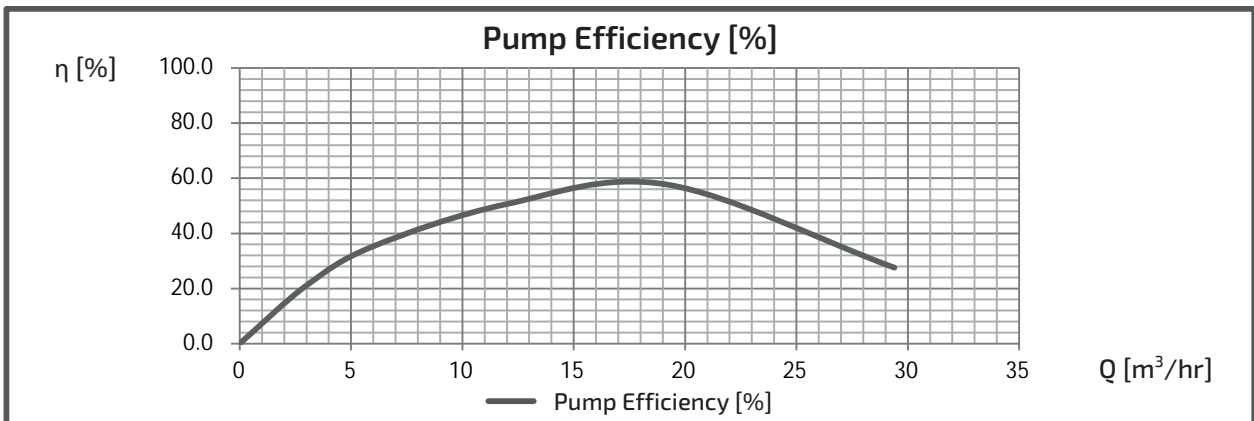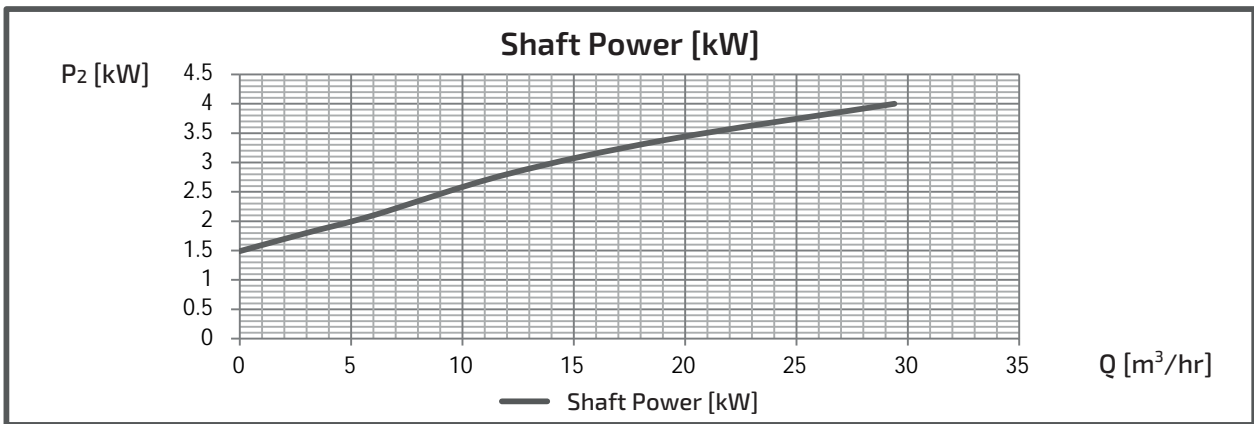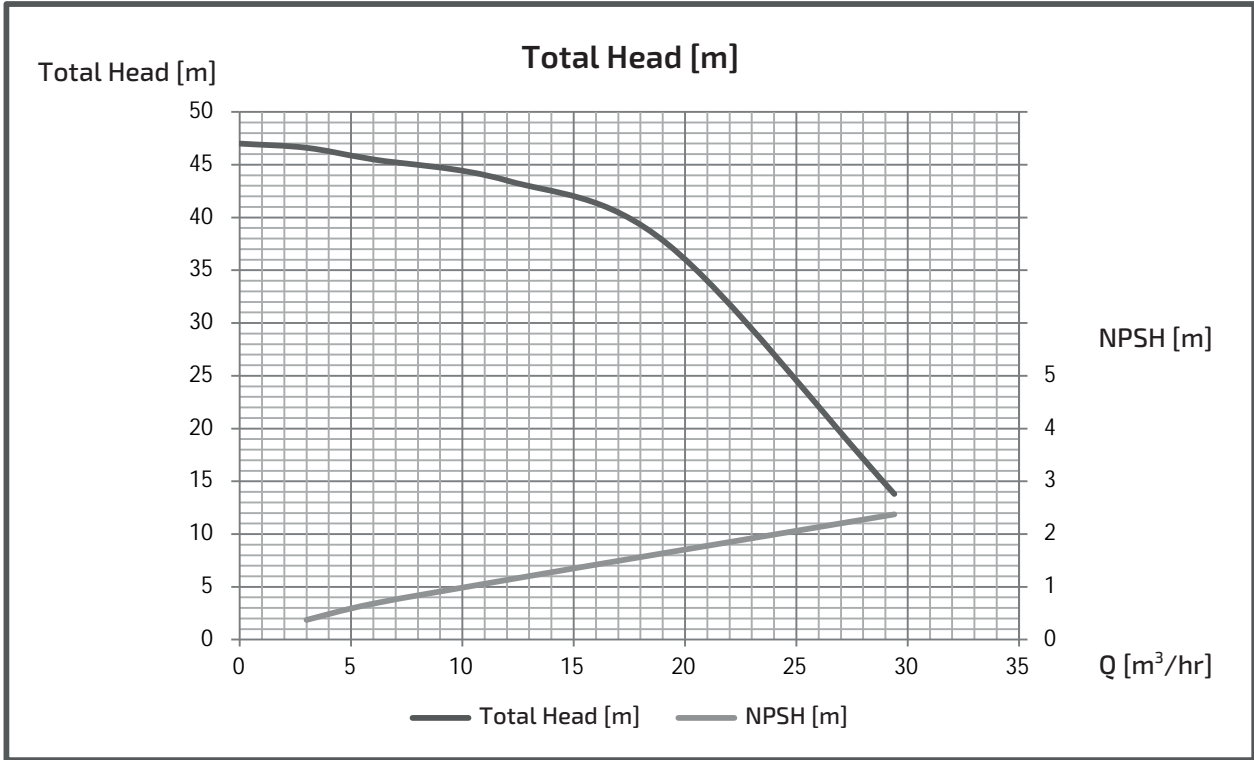

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES505CE5.5T4




■ PERFORMANCE CURVES

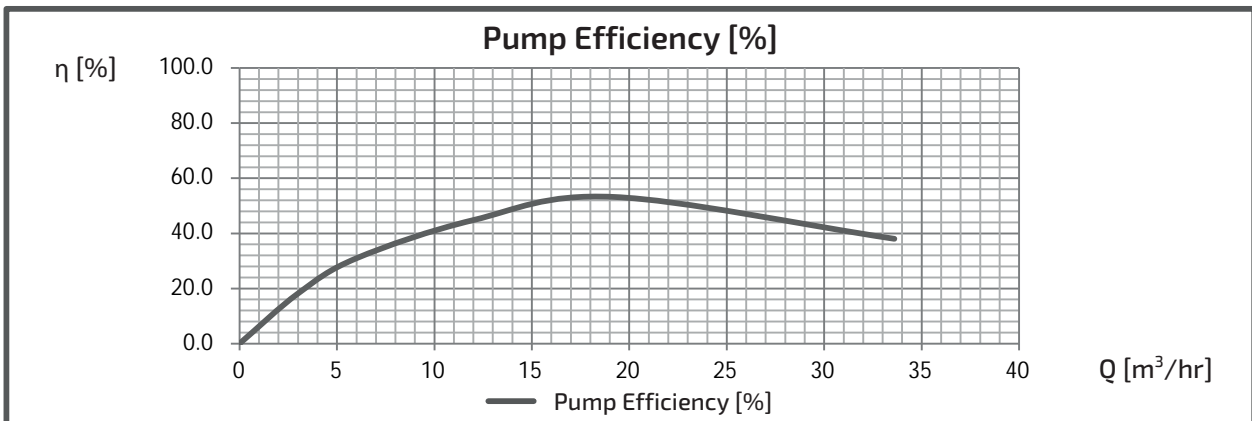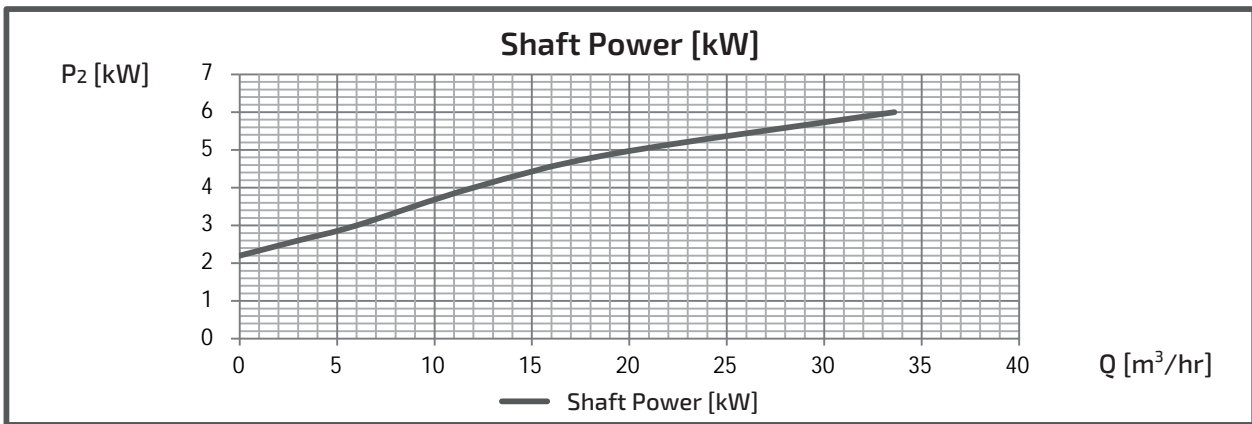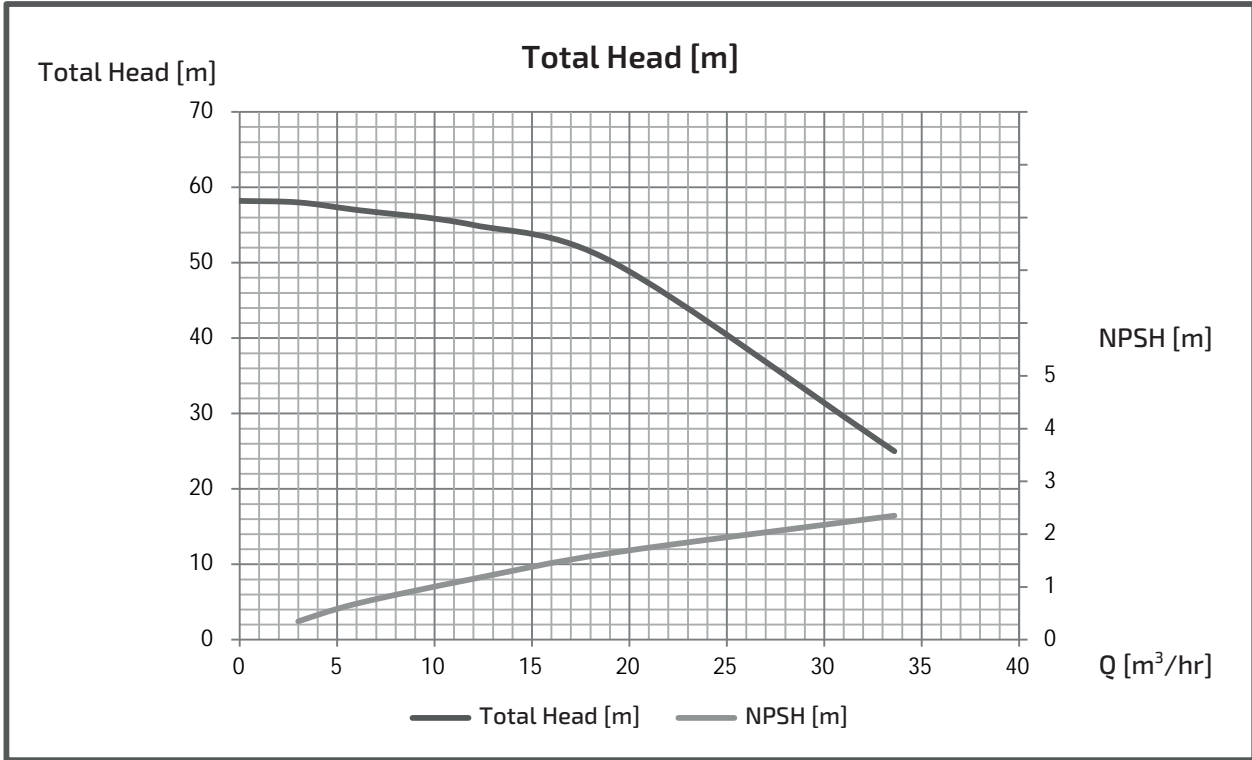

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES655CE3.7T4




■ PERFORMANCE CURVES

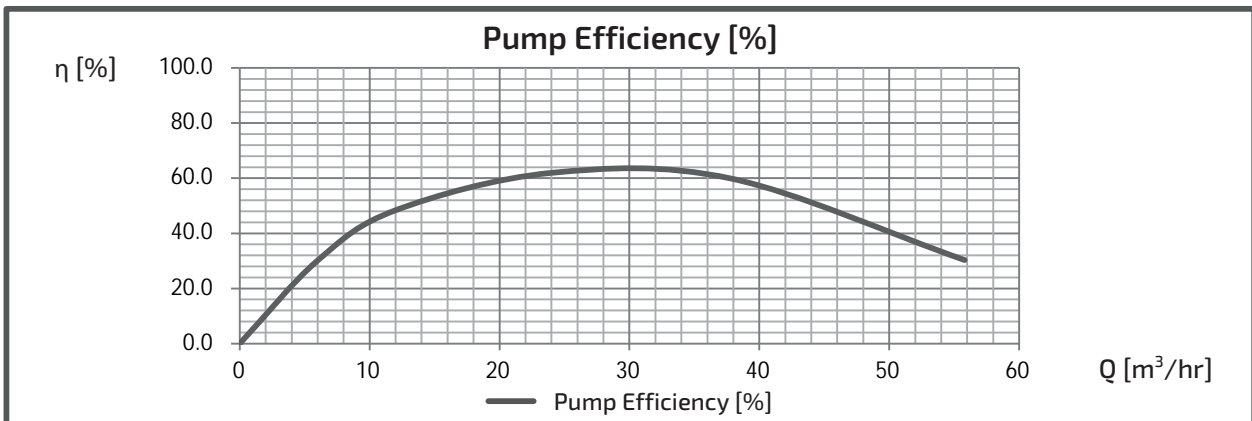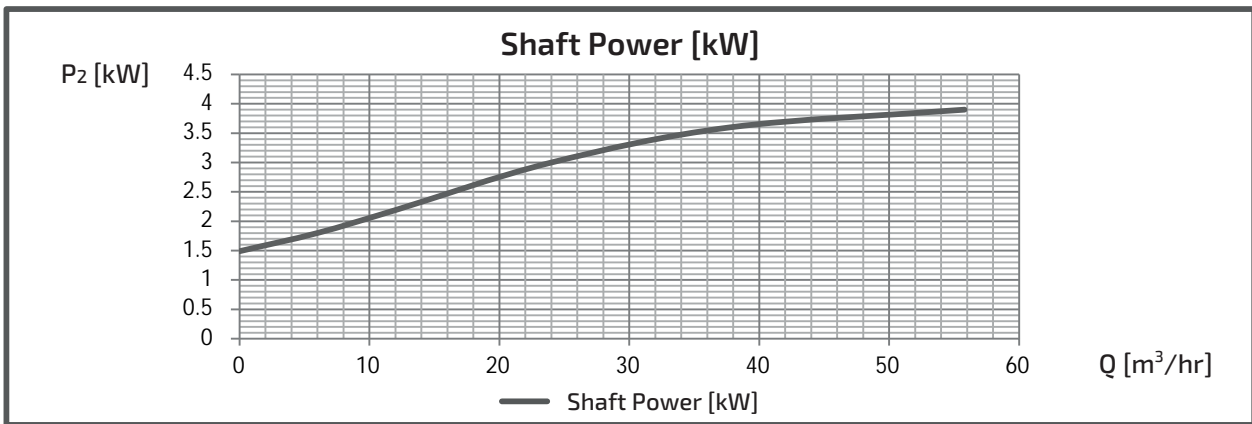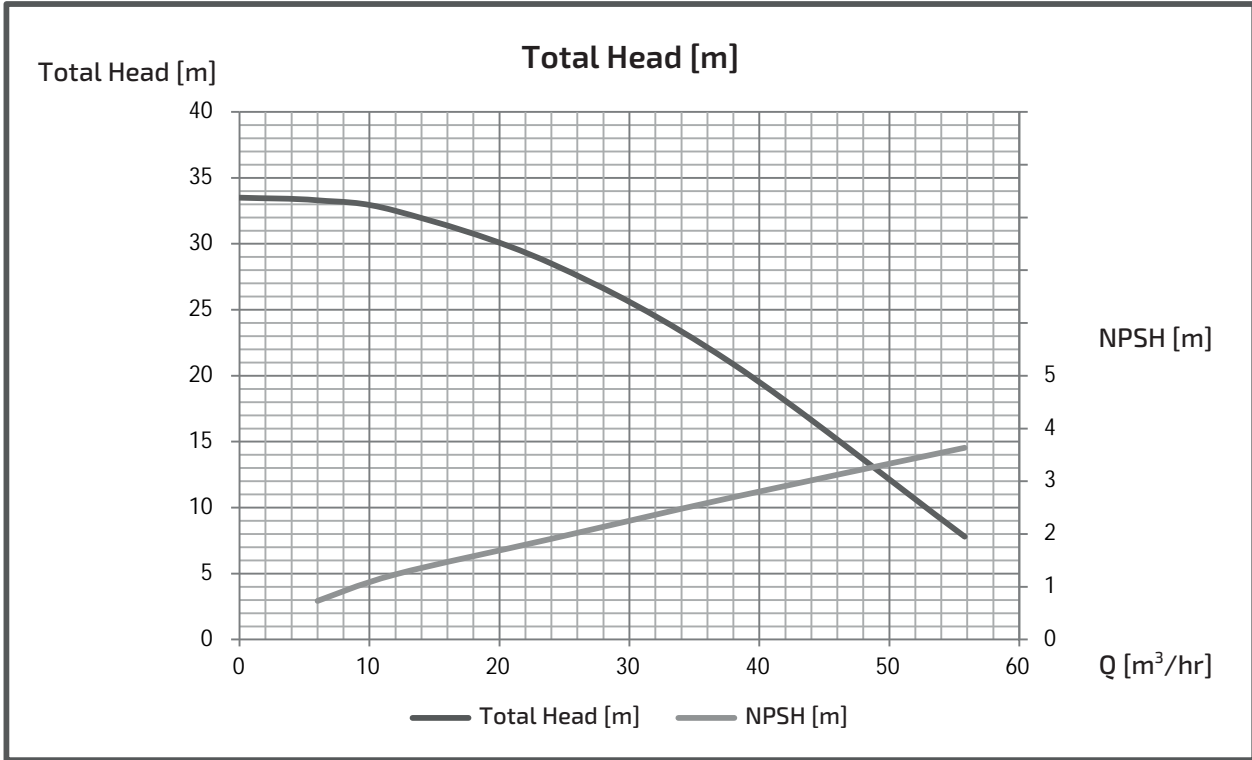

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES655CE5.5T4




■ PERFORMANCE CURVES

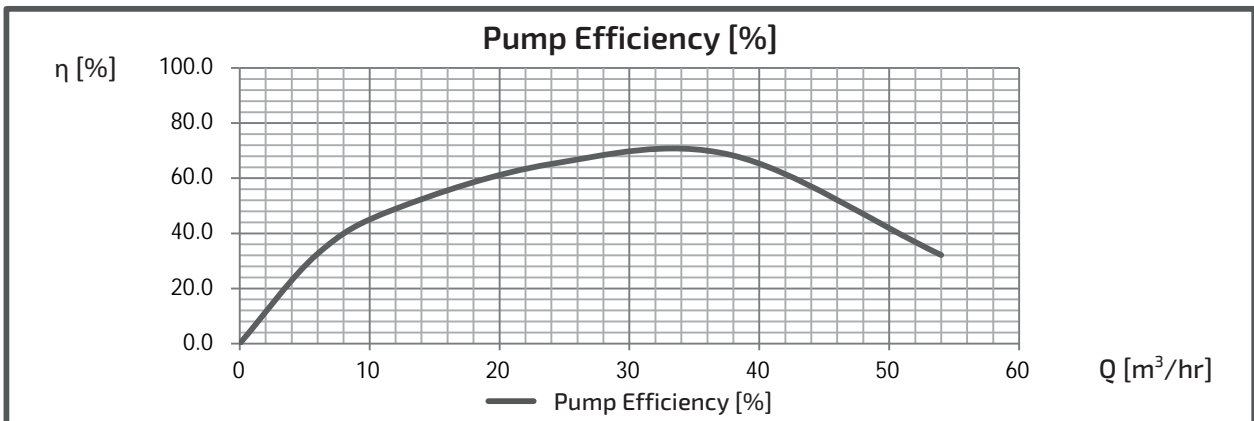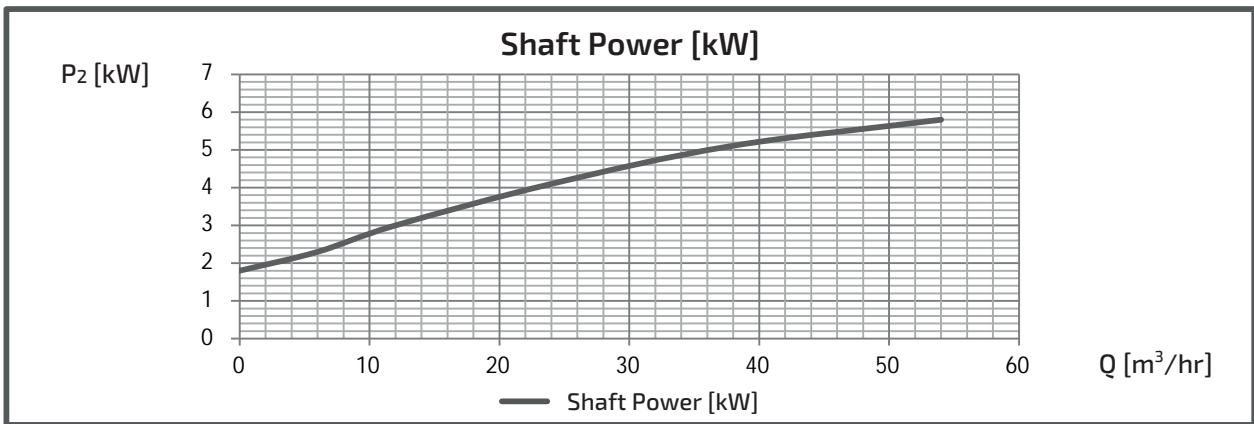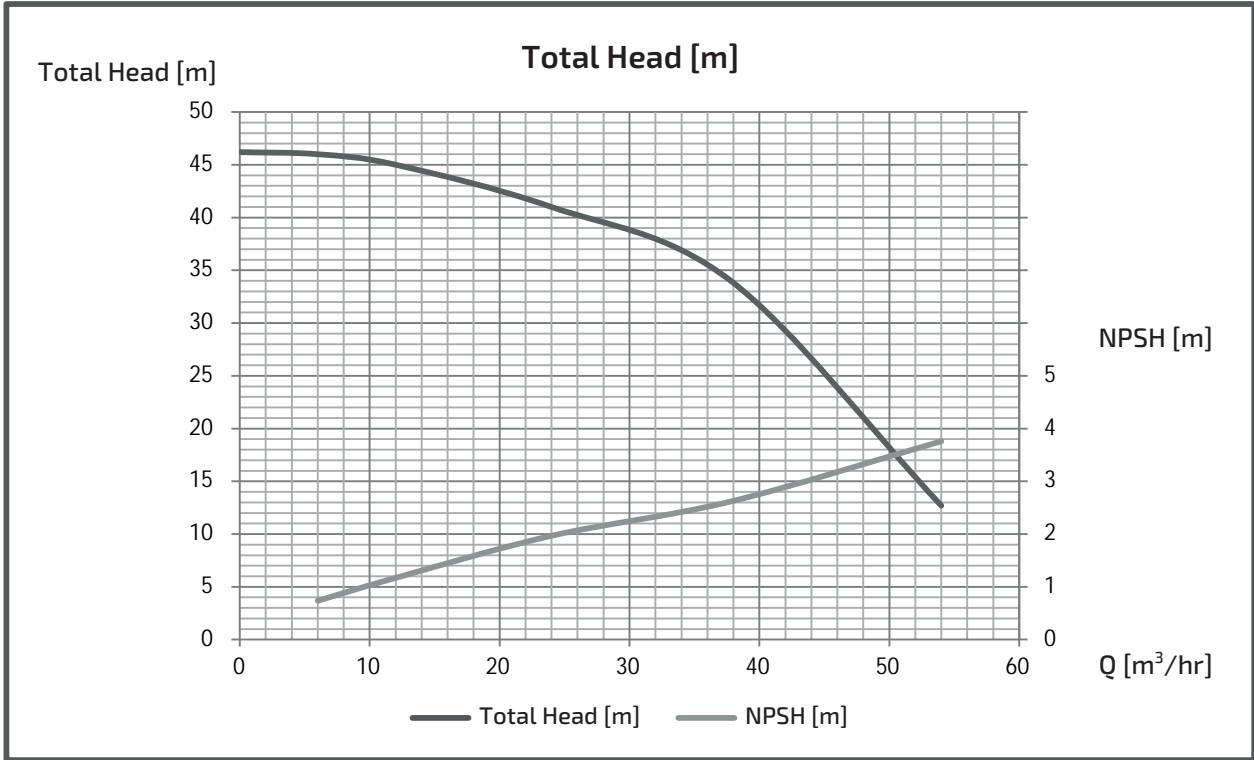

EXPECTED PERFORMANCE CURVE (GES-C)

MODEL : GES655CE7.5T4

■ PERFORMANCE CURVES

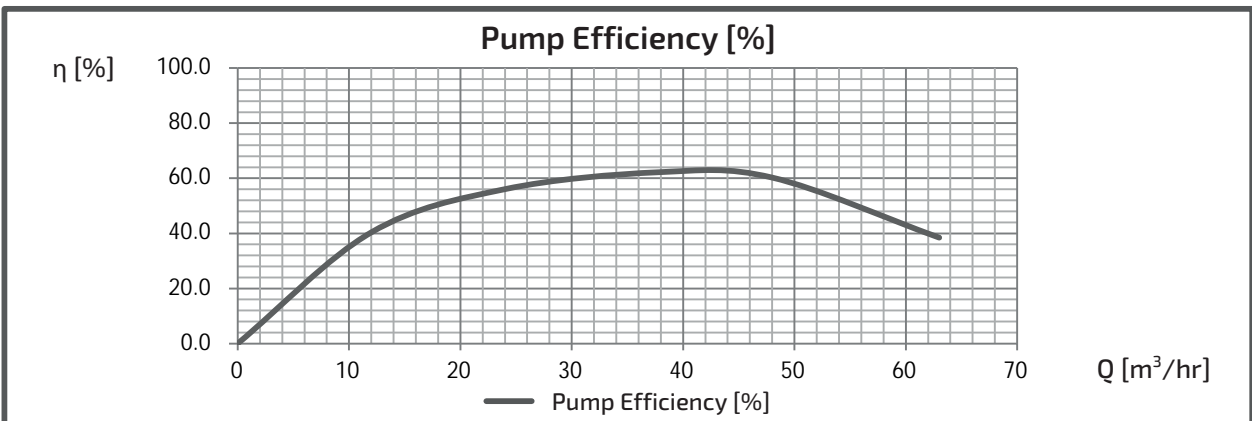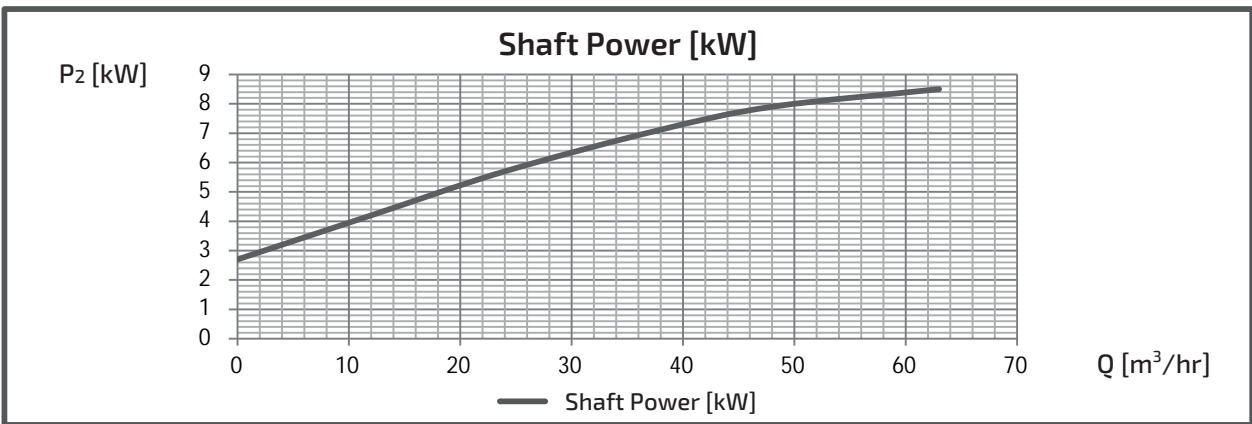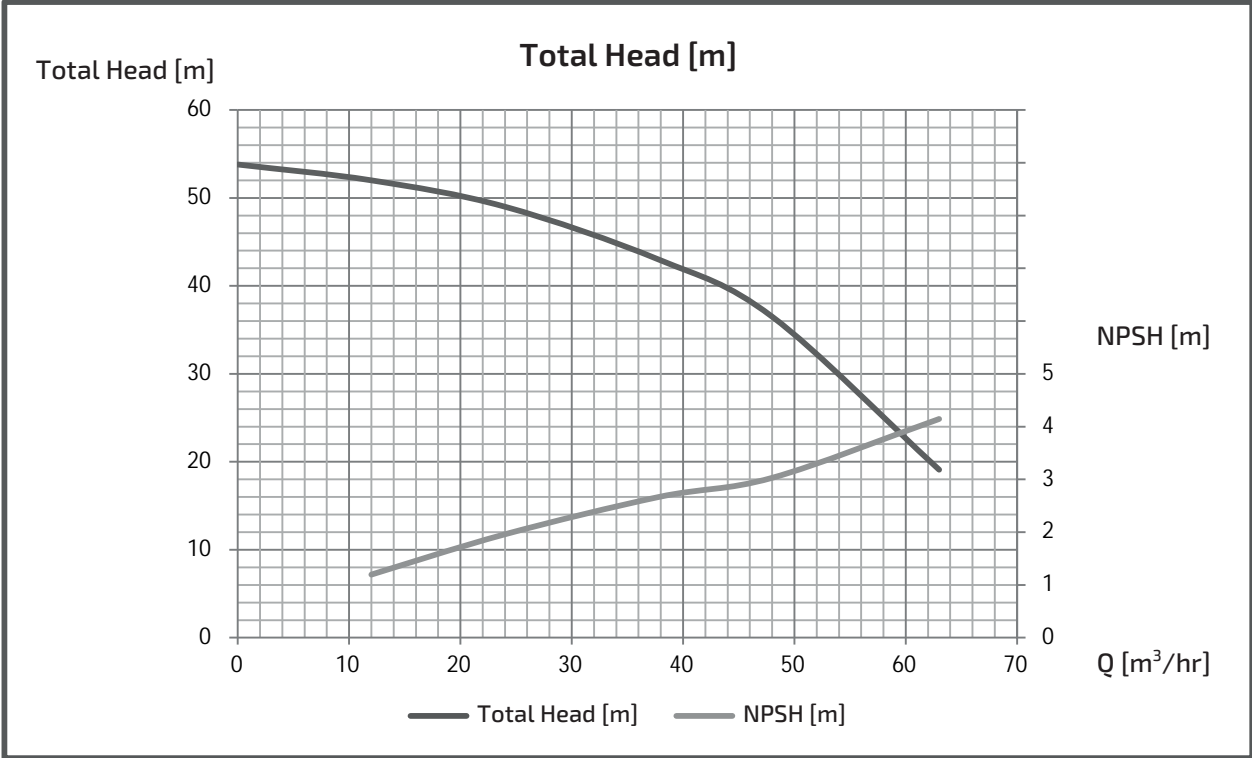

IMPORTANT SAFETY PRECAUTIONS

Always read the manual thoroughly and fully comprehend the contents for safe operation before starting use. Precautions for using products safely and for preventing personal injuries or physical damage are given in the manual.

- Matters falling under the following may not be covered by the warranty: uses out of the specified scope of application, failure to comply with precautions, improper repairs and alterations, matters arising from natural disasters, matters arising from the installation environment (improper power source, foreign objects, sand etc.), non-compliance with laws and regulations or standards pertaining thereto, accidental or intentional damage or injury, replacement of consumable parts, defects due to resale, etc.
- Do not use the product for applications out of the product specifications. Doing so may cause electric shock, fire, water leakage, etc.
- Have spare equipment ready when using pumps for equipment for living things (fish farms, fish tanks, aquariums, etc.) or critical equipment.
- Pump failure may cause lack of oxygen and water quality deterioration, and may affect the lives of the living things.
When using pumps for equipment for living things (fish farms, fish tanks, aquariums, etc.), do not install the pump in the tank where the living things are put into. The current leakage or sealing liquid leak from the mechanical seal may cause the death of the living things.
- If used to transport food-related items, give due consideration to the materials used. Contamination by foreign objects may occur.
- Avoid using for living things which disagrees with copper alloy. It may affect the lives of the living things.
- Select a product which is appropriate for your application. Inappropriate use of products may cause accidents.
- Conduct construction in accordance with the applicable laws and regulations (the Technical Standards of Electric Installation, interior wiring regulation, Building Standards Act, Water Supply Law, etc.). Not only does it violate the laws and regulations, but it also may cause injuries due to electric shock, fire, falling and tipping over.
- Do not use in places where people are assumed to get in contact with the product (baths, pools, lakes, etc.). Electric leak may occur and cause electric shock.
- Depending on the equipment, attach a filter etc. appropriate for your application on the discharge side before use, perform thorough flushing to check that there is no contamination. Cutting oil, rubber mold releasing agent, foreign objects etc. from the manufacturing line and cutting oil, foreign objects etc. from the pipeline may contaminate the liquid which is to be handled.
- Do not operate pumps with a specification of 50Hz at 60Hz. It may cause damage due to overpressure or burn damage of motors etc. due to overload. Do not operate pumps with a specification of 60Hz at 50Hz. Pump performance may be reduced.
- Only repair technicians may disassemble, repair, modify the product or replace cables. Defects may cause failure, damage, electrification or fire.
- It is recommended that both periodic and daily inspections be performed in order to ensure that the pump will operate reliably for as long as possible. Failure to perform inspections may lead to pump failure, accidents etc. For periodic inspections, please consult your distributor or our nearest sales office.

Note

Specifications/Configurations may be altered as a result of improvements and such.
Unauthorized reproduction of this document is prohibited.